

INTERNATIONAL
REGISTERED GRAPHICAL ITEM
CLASS: BIIF PROFILE

ISO/IEC
BIIF PROFILE
NSIF01.00

- Information Technology -
- Computer Graphics and Image Processing -
- Registered Graphical Item, Class: BIIF Profile -

NATO Secondary Imagery Format
Version 01.00
(NSIF01.00)

August 2002

This page intentionally left blank.

Table of Contents-

<u>Section</u>	<u>Page</u>
Foreword	v
Introduction	vii
1 Scope	1
1.1 General.....	1
1.2 Position Within the Graphical Item Register.....	1
1.3 User Requirement and Scenario.....	2
2 Normative References.....	2
3 Definitions	4
4 Abbreviations.....	5
5 Conformance	5
6 Profile Registration	5
7 Specifications of the NSIF Profile.....	5
7.1 NSIF01.00 Profile Summary	5
7.2 Completed Profile Pro forma.....	6
7.2.1 Rules for Filling Out the Pro forma Tables	6
7.3 Profile Index	7
7.4 Profile Tables.....	7
7.4.1 NSIF File Header	8
7.4.2 NSIF Security Fields	12
7.4.3 NSIF Image Subheader Fields	17
7.4.4 NSIF Image Data Mask Table	27
7.4.5 NSIF Symbol Subheader Fields.....	28
7.4.6 NSIF Text Subheader Fields.....	30
7.4.7 NSIF Tagged Record Extensions (TREs).....	32
7.4.8 NSIF Extension Segments	32
7.4.8.1 NSIF Data Extension Segments (DESS).....	32
7.4.8.2 NSIF Reserved Extension Segments (RESs).....	33
7.4.9 NSIF TFS Requirements.....	33
7.4.10 Implementation Support Requirements.....	34
ANNEX A: Terms and Definitions	A-1
ANNEX B: NSIF Operational Concept.....	B-i
ANNEX C: NSIF File Format	C-i
ANNEX D: Standard Geospatial Support Data Extensions.....	D-1
ANNEX E: Complexity Levels (CLEVEL)	E-1

This page intentionally left blank.

Foreword

The International Standard (IS) 12087-5:1998, Basic Image Interchange Format (BIIF) provides guidance for creating profiles of BIIF. The following is submitted as a result of the North Atlantic Treaty Organisation (NATO) Standardization Agreement (STANAG) 4545, promulgated by the Chairman, Military Agency for Standardization (MAS) under the authority vested in him by the NATO Military Committee:

BIIF Profile: NATO Secondary Imagery Format Version 01.00 (NSIF01.00)

This standard is normative.

This page intentionally left blank.

Introduction

The definition of the NSIF01.00 Profile is within the context of the BIIF Profile class of graphical items in accordance with the principles and procedures specified in ISO/IEC 9973, “Computer graphics and image processing -- Procedures for registration of graphical items”, and Annex C of ISO/IEC 12087-5:1998, “Profiling BIIF”.

The NSIF01.00 Profile of BIIF was cooperatively developed between the ISO and NATO communities.

The NSIF01.00 is a BIIF profile intended to promote interoperability for the exchange of Imagery among military Command, Control, Communications, and Intelligence (C3I) systems. The NSIF01.00 is the standard for formatting digital imagery files and imagery-related products and exchanging them within the user community.

The NSIF01.00 profile forms the compliance document of NATO STANAG 4545 and (U.S.) MIL-STD-2500. The basis of an imagery interoperability program is formed only when these documents are used in conjunction with ISO/IEC 12087-5:1998. If inconsistencies between this document and ISO/IEC 12087-5:1998 are found by users of this standard, it is requested that the user identify the inconsistency to the Custodian of STANAG 4545 and prepare a defect report to ISO, as appropriate to correct the inconsistency.

This page intentionally left blank.

Information Technology

Computer graphics and image processing

Registered Graphical Item, Class: BIIF Profile

NATO Secondary Imagery Format Version 01.00 (NSIF01.00)

1 Scope

1.1 General

The Basic Image Interchange Format (BIIF) provides a file format that is suitable for the interchange, storage, and retrieval of map and imagery information. The file format consists of a file header and associated image(s), symbol(s), text and/or associated data in a way that is compatible between systems of different architectures and devices of differing capabilities and design.

The NSIF01.00 profile defines allowed data values and ranges for header and subheader fields contained in an NSIF01.00 file. The NSIF01.00 file shall contain valid data (that is, data in accordance with the restrictions specified for the contents of each field in this profile definition). The NSIF01.00 profile meets BIIF ISO/IEC 12087-5:1998 application requirements.

1.2 Position Within the Graphical Item Register

NSIF01.00 is a profile of ISO/IEC 12087-5, BIIF, registered under the BIIF Profile class of graphical items in accordance with ISO/IEC 9973. The NSIF01.00 tailors BIIF to promote a high degree of interoperability among two or more common communities of interest through the selection of a common set of functionality for digital mapping and imagery.

The graphical item registration information is as follows:

Graphical Item Class:	BIIF Profile
Graphical Item Long Name:	NATO Secondary Imagery Format Version 01.00
Graphical Item Short Name:	NSIF01.00 (It should be noted that this profile incorporates features for both the NATO NSIF format and the U.S. NITF format, which are essentially identical. Both user groups will reference the same profile but NITF encoded files will use NITF02.10 in the file header (FHDR) and file version (FVER) fields. NSIF readers should treat these values as NSIF01.00 for these two fields.)
Sponsoring Authority:	The United Kingdom sponsors this Profile through their membership in the ISO committee.

Preparing Authority: This document was prepared for the sponsoring authority by the NSIF (NATO STANAG 4545) Custodian; U.S.; Secretary of the Air Force, Information Dominance Directorate, Reconnaissance Systems Division (SAF/AQIJ).

1.3 User Requirements and Scenario

NSIF01.00 is designed to promote interoperability for the exchange of digital electronic imagery among multi-national Command, Control, Communications, and Intelligence (C³I) Systems, and those systems needing to interoperate with C³I imagery systems.

- 1) The profile is comprehensive in the type and format of data permitted in the BIIF File.
- 2) The profile is implementable across a wide range of computer systems without reduction of available features.
- 3) The profile allows extensibility to accommodate data types and functional requirements not foreseen.
- 4) The profile provides a useful capability with limited formatting overhead.

2 Normative References

The following documents contain provisions that, through reference in this text, constitute provisions of the NSIF01.00 profile of BIIF. Applicability is limited to only the specific instance of the reference document; other aspects of referenced documents are for information. At the time of publication the editions indicated were valid but all documents are subject to revision. Parties in agreement, based on this profile, are warned against automatically applying more recent editions of the documents listed below. The nature of references made by the profile to such documents is specific to a particular edition. Members of IEC and ISO maintain a register of currently valid International Standards and profiles.

<u>Referenced Documents:</u>	<u>Title</u>
ISO/IEC 7498-1	Information technology - Open systems interconnection - Basic reference model: The basic model
ISO/IEC 8632-1	Information technology - Computer graphics - Metafile for the storage and transfer of picture description information: Functional specification
ISO/IEC 8632-1 AMD1	Rules for profiles
ISO/IEC 8632-1 AMD2	Application structuring extensions
ISO/IEC 9973	Computer graphics and image processing -- Procedures for registration of graphical items

<u>Referenced Documents:</u>	<u>Title</u>
ISO/IEC 10646-1:1993/ Amd.2:1996	Information technology - Universal Multiple-Octet Coded Character Set (UCS) –Part 1: Architecture and Basic Multilingual Plane- Amendment 2: UCS Transformation Format 8 (UTF-8)
ISO/IEC 10918-1	Information technology - Digital compression and coding of continuous-tone still images: Requirements and guidelines
ISO/IEC IS 10918-3	Information technology - Digital compression and coding of continuous-tone still images: Extensions
ISO/IEC 11172-1	Information technology - Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s - Part 1: Systems
ISO/IEC 11172-2	Information technology - Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s - Part 2: Video
ISO/IEC 11172-3	Information technology - Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s - Part 3: Audio
ISO/IEC 11172-4	Information technology - Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s - Part 4: Conformance testing
ISO/IEC 11172-5	Information technology - Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s - Part 5: Software simulation
ISO/IEC IS 12087-5	Information technology - Computer graphics and image processing - Image Processing and Interchange (IPI) - Functional specification - Part 5: Basic image interchange format (BIIF)
ISO/IEC 13818-1	Information technology - Generic coding of moving pictures and associated audio information - Part 1: Systems
ISO/IEC IS 15444-1	Information technology – JPEG 2000 Image Coding System
ITU-R RECMN BT.601-5	Studio encoding parameters of digital television for standard 4:3 and wide-screen 16:9 aspect ratios
ITU-T RECMN T.4 AMD2	Terminals for telematic services - Standardization of group 3 facsimile apparatus for document transmission
STANAG 2211	Geodetic Datums, Ellipsoids, Grids and Grid References
STANAG 4545	NATO Secondary Imagery Format (NSIF)
STANAG 5500	NATO Message Text Formatting System (FORMETS) - ADatP-3
EO 12958	Classified National Security Information
FIPS PUB 10-4	Countries, Dependencies, Areas of Special Sovereignty, and Their Principal Administrative Divisions
DOD 5200.1-R	Department of Defense Information Security Program Regulation
MIL-STD-188-198A	Joint Photographic Experts Group (JPEG) Image Compression for the National Imagery Transmission Format Standard
MIL-STD-2301A	Computer Graphics Metafile (CGM) Implementation Standard for the National Imagery Transmission Format Standard
MIL-STD-2500B	National Imagery Transmission Format Version 2.1 for the National Imagery Transmission Format Standard
MIL-STD-6040	United States Message Text Formatting Program
NIMA N0106-97	National Imagery Transmission Format Standard Bandwidth Compression Standards and Guidelines Document

<u>Referenced Documents:</u>	<u>Title</u>
NIMA TR 8350.2	World Geodetic System, Third Edition

The following documents are included for information purposes only. No references to these documents are included in this profile.

<u>Related Documents:</u>	<u>Title</u>
IEEE 754	IEEE Standard for binary floating point arithmetic
ISO/IEC 646	Information technology: ISO 7 bit-coded character set for information interchange
ISO 1000	SI units and recommendations for the use of their multiples and of certain other units
ISO 4873	Information technology - ISO 8-bit code for information interchange - Structure and rules for implementation
ISO 8601	Data elements and interchange formats - Information interchange - Representation of dates and times
ISO 8879	Information processing - Text and office systems - Standard Generalised Mark-up Language (SGML)
ISO/IEC 9069	Information processing - SGML support facilities - SGML Document Interchange Format (SDIF)
Q-STAG 509	Military Symbols
STANAG 2019	Military Symbols for Land Based Systems
STANAG 2215	Evaluation of Land Maps, Aeronautical Charts and Digital Topographic Data
STANAG 3277	Air Reconnaissance Request/Task form
STANAG 4420	Display Symbolology and Colours for NATO Maritime Units
STANAG 4559	NATO Standard Image Library (NSIL) Interface Technical Support Team
STANAG 7023	Air Reconnaissance Imagery Data Architecture
STANAG 7024	Imagery Air Reconnaissance Tape Recorder Standard
STANAG 7074	Digital Geographic Information Exchange Standard
STANAG 7085	Interoperable Data Links for Imaging Systems
AC 224(AG/4)D-67	NATO Secondary Imagery Format (NSIF) Compliance and Interoperability Test and Evaluation Program Plan
NATO C-M(55) 15 (Final)	Security within the North Atlantic Treaty Organisation, Document, Volume I, Enclosures A, B, C, and E, Issue 4: 31 July 1972
DMA TR 8358.1	Datums, Ellipsoids, Grids, and Grid Reference System
1-	Application for copies of ISO documents may be addressed to the respective national ISO representative.
2-	Copies of NATO Standardization Agreements may be obtained from HQ NATO, Military Agency for Standardization, 1110 Brussels, Belgium if releasable to the general public. Some Standardization Agreements may only be released to NATO member nations.
3-	Copies of the U.S. MIL-STDs are available from Standardization document order Desk, 700 Robbins Avenue, Building 4D Philadelphia, PA 19111-5094.

3 Definitions

For the purposes of the NSIF01.00 profile, the definitions shown in Annex A, paragraph 2, apply.

4 Abbreviations

For the purposes of the NSIF01.00 profile, the abbreviations (acronyms) shown in Annex A, paragraph 1, apply.

5 Conformance

Conformance is a necessary step towards achieving interoperability between different imagery applications and operating systems. Products that conform to the NSIF profile will also meet the conformance requirements of ISO/IEC 12087-5.

6 Profile Registration

This profile is registered under the provisions and procedures defined in Annex C of ISO/IEC 12087-5:1998 and through the ISO/IEC processes found in ISO/IEC 9973.

7 Specification of the NSIF01.00 Profile

7.1 NSIF01.00 Profile Summary

The NSIF01.00 profile consists of the specified pro forma tables identifying the allowable values for each field, supplemental tables for additional explanation, and Annexes that contain the complete description of NSIF. Note that for entries in the pro forma that specify additional constraints beyond those listed in the model profile, the constraints are defined by references to the appropriate field entries in the Annexes. For other fields in the pro forma, no specific references are provided, however, users of the format should consult the Annexes for the complete explanation of the field values.

7.2 Completed Profile Pro forma

This document completes the Profile Pro forma from ISO/IEC 12087-5:1998 as required by the standard and is detailed in the following tables that are copied from that standard. The references in the pro forma are to ISO/IEC 12087-5:1998. The table numbers are generally in the same sequence as those shown in ISO/IEC 12087-5:1998, Annex C. In addition, since tables in both ISO/IEC 12087-5:1998 and this document are used in cross references, all table references prefaced by the term "BIIF" indicate references in ISO/IEC 12087-5:1998. Cross references to tables with no preface indicate tables contained in this profile. This eliminates the confusion between cross references to tables with similar numbers.

7.2.1 Rules for filling out the pro forma tables

The completion of all tables below is in accordance with the following rules and recommendations. As indicated in the instructions below, the profile designer may elect to accept the Profile value for each part and field simply by indicating "Same as Model Profile" in the appropriate column.

- R1 The tables provide an expression of value range or a list of allowable BCS entries and a definition of the significance of each entry. When no list or range is present, the default will be to fill the field with spaces (0x20) for BCS-A fields and zeros (0x30) for BCS-N fields.
- R2 The profile definition may constrain allowable field entries to further define the allowable syntax in a manner similar to that of the date and time fields, e.g., CCYYMMDDhhmmss.
- R3 The profile definition may define sub-fields. The definition shall be done in a similar manner as to that used in clause 4 for defining fields in this standard. A separately documented definition may be referenced in the pro forma and attached to the pro forma.
- R4 The profile definition for security-related fields shall be identical for all header and subheaders (i.e. FSEC, ISCSEC, SSEC, TSSEC, etc.). A separately documented definition may be referenced in the pro forma and attached to the pro forma.
- R5 The profile may indicate a numeric value range for the field in the form of Minimum-value - Maximum-value (inclusive) specification. The values may be integers, or in some cases other numeric types as applicable to the fields defined in Clause 4.
- R6 Where indicated, a unique string identifier shall be provided. The domain across which uniqueness must be maintained is further clarified as follows: 1) within a BIIF file instance, 2) within profile, 3) within ISO standards, and within an authorised registry.
- R7 For some fields there must be a unique NULL/ZERO/NONE indication because of a conditional field dependency on this value. This indicator is usually "N" and shall appear first in the enumerated set of values, for example: {"N", "KEY1", "KEY2"}
- R8 The fields marked U8 (UTF-8) are designated to contain a textual comment (general information, name, etc.) that may be language specific but is otherwise unstructured.
- R9 For Profile Variant Value (PVV) designated fields, the profile definer may indicate the value constraint on the field as follows:
- Any value permitted by the standard (as specified in Clause 4);
 - A specific set of values or single value from an enumerated set (Rule 1) or a range of values (Rule 5) as permitted by the standard; or,
 - The Model Profile constraint (by indicating "Same as Model Profile").
- R10 For Profile Variant Unspecified (PVU) designated fields, the profile definer is required to provide a complete discussion of the field use, including the following points:

- a) Any substructuring of the field (Rule 3);
- b) Any syntactic constraint against either the entire field and/or sub-fields (Rule 2); and,
- c) An explanation of the meaning of the field and its subfields, including detailed examples of usage.

7.3 Profile Index

Table	Name	Paragraph	Page
1	File Header Fields	7.4.1	8
2	Security fields specification	7.4.2	12
3	Image subheader fields	7.4.3	17
4	Image data mask table	7.4.4	28
5	Symbol subheader	7.4.5	28
6	Text subheader	7.4.6	31
7	Tagged record extensions	7.4.7	32
8a	Data extension segment pro forma	7.4.8.1	33
8b	Reserved extension segment pro forma	7.4.8.2	33
9	NSIF TFS Requirements	7.4.9	33
10	Implementation Support Requirements	7.4.10	34

7.4 Profile Tables

The following clauses provide the NSIF profile specification.

7.4.1 NSIF File Header

Table 1 is the NSIF profile specification for BIIF file header fields.

Table 1 -- File Header Fields

FIELD	TYPE	CE / SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
	N/A	N/A	Specify whether this new profile specification includes the entire model profile BFMP as a capability in addition to the new profile capabilities (Clause 5.1)		<p><input type="checkbox"/> Model profile fully included (can produce and/or read both BFMP files and the new profile specification files).</p> <p><input checked="" type="checkbox"/> Model profile not fully included (can only produce and/or read the new profile specification files).</p>
FHDR	R/PVV	A/4	Unique profile name not already registered.	BFMP	NSIF (Note: Some existing systems produce files that use the characters "NITF". Applications should read "NITF" as "NSIF" for this field.
FVER	R/PVV	A/5	Version identifier unique to the registered profile name.	01.00	01.00 (Note: Some existing systems produce files that use the characters "NITF" in the FHDR field. For these files, the value 02.10 will be included in this field. Applications should read "02.10" as "01.00" for this field.
CLEVEL	R/PVV	A/2	<p>A value of 00 indicates the profile has no internal hierarchy.</p> <p>If an internal hierarchy is desired, the profile may designate two or more values in the range 01-99 to differentiate parameters, values, and ranges within the internal hierarchy. Each profile entry shall specify the CLEVEL hierarchy constraints where applicable. When profile entries do not specify CLEVEL constraints, the profile entry is applicable across all CLEVELs.</p>	<p>01 02</p> <p>The CCS extent for each CLEVEL is:</p> <p>01 1024x1024 02 2048x2048</p>	<p>Select ONE of the following:</p> <p><input type="checkbox"/> Same as Model Profile</p> <p><input type="checkbox"/> CLEVEL=00</p> <p><input checked="" type="checkbox"/> List allowed values and CCS extent below. Enter CLEVEL specification for each applicable field in the profile.</p> <p>List: CLEVEL 03, 05, 06, 07 (All Others Reserved)</p> <p>03 = 2048 x 2048 05 = 8192 x 8192 06 = <=65535 x 65535 07 = 99999999 x 99999999</p> <p>See Annex C, Appendix 1, Table C-1-1, Field "CLEVEL" and Annex E, Table E-1, Field "Maximum File Size".</p>
STYPE	R	A/4	Always BF01 for all profiles of this standard.	BF01	<input checked="" type="checkbox"/> Same as Model Profile
OSTAID	R/PVU	A/10	Any BCS-A string is allowed. Profile may specify further constraints.	Any BCS-A string.	<p>Select ONE of the following:</p> <p><input checked="" type="checkbox"/> Same as Model Profile</p> <p><input type="checkbox"/> The following are profile specific constraints:</p>
FDT	R	N/14	As specified in BIIF Table 1 for all profiles.	CCYYMMDDhhmmss	<input checked="" type="checkbox"/> Same as Model Profile

Table 1 -- File Header Fields (continued)

FIELD	TYPE	CE / SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
FTITLE	R/PVU	U8/80	Any UTF-8 string is allowed. Profile may specify further constraints.	Any BCS-A string.	Select ONE of the following: ___ Same as Model Profile __X__ The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-1, Field "FTITLE".
FSEC	R/PVU	U8/167	The profile definition for security-related fields shall be identical for all header and subheaders (i.e., FSEC, ISCSEC, SSEC, TSSEC, etc.). The profile definition may define subfields and associated constraints using BIFF Table C.2.	See BIFF Table C.2	Select ONE of the following: ___ Same as Model Profile __X__ The profile specific constraints are as specified in Table 2.
FSCOP	R/PVV	N/5	Any BCS/N string is allowed. Profile may specify further constraints.	00000-99999 Any entry of 00000 shall mean that no count of copies is being maintained.	Select ONE of the following: __X__ Same as Model Profile ___ The profile specific constraints are as specified in Table 2
FSCPYS	R/PVV	N/5	Any BCS/N string is allowed. Profile may specify further constraints.	00000-99999 Any entry of 00000 shall mean that no total file count is being tracked.	Select ONE of the following: __X__ Same as Model Profile ___ The following are profile specific constraints:
ENCRYP	R/PVU	A/1	Any BCS-A character is allowed. 0=not encrypted; other codes defined by profile.	0 = not encrypted.	Select ONE of the following: __X__ Same as Model Profile ___ The following are profile specific constraints:
OID	R/PVU	U8/45	Any UTF-8 string is allowed. Profile may define subfields and specify associated constraints.	Any BCS-A string. No subfields defined.	Select ONE of the following: ___ Same as Model Profile __X__ The following are profile specific constraints: OID is split into three subfields: FBKGC (Originator's File Background Colour), ONAME (Originator's name), OPHONE (Originator's phone) See Annex C, Appendix 1, Table C-1-1, Fields "FBKGC", "ONAME", and "OPHONE".

Table 1 -- File Header Fields (continued)

FIELD	TYPE	CE / SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00										
FL	R/PVV	N/12	As specified in BIFF Table 1 for all profiles. Overall file size constraints may be imposed by profile	Not to exceed 2 Gigabits -1, (2147483647)	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> The following are profile specified constraints: <table style="margin-left: 20px;"> <tr> <td>CLEVEL</td> <td>MAX FILE SIZE</td> </tr> <tr> <td>03</td> <td>50 MB - 1</td> </tr> <tr> <td>05</td> <td>1 GB - 1</td> </tr> <tr> <td>06</td> <td>2 GB - 1</td> </tr> <tr> <td>07</td> <td>10 GB - 1</td> </tr> </table> In accordance with Annex C, Appendix 1, Table C-1-1, Field "FL" and Annex E, Table E-1, Field "Maximum File Size".	CLEVEL	MAX FILE SIZE	03	50 MB - 1	05	1 GB - 1	06	2 GB - 1	07	10 GB - 1
CLEVEL	MAX FILE SIZE														
03	50 MB - 1														
05	1 GB - 1														
06	2 GB - 1														
07	10 GB - 1														
HL	R	N/6	As specified in BIFF Table 1 for all profiles.	Calculated value.	<input type="checkbox"/> Same as Model Profile										
NUMI	R/PVV	N/3	Profile shall specify the number or range of image segments allowed in a BIFF file conforming to the profile.	CLEVEL 01: 000-001 CLEVEL 02: 000-020	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> The profile specified range is: <table style="margin-left: 20px;"> <tr> <td>CLEVEL 03:</td> <td>000-020</td> </tr> <tr> <td>CLEVEL 05-07:</td> <td>000-100</td> </tr> </table> In accordance with Annex C, Appendix 1, Table C-1-1, Field "NUMI", and Annex E, Table E-1, Field "Number of Image Segments Per File".	CLEVEL 03:	000-020	CLEVEL 05-07:	000-100						
CLEVEL 03:	000-020														
CLEVEL 05-07:	000-100														
LISHn & Lln	C C	N/6 N/10	A pair of length values as specified in BIFF Table 1. These fields repeat (in pairs) the number of times identified by NUMI.	Calculated.	<input type="checkbox"/> Same as Model Profile										
NUMS	R	N/3	Profile shall specify the number or range of symbol segments allowed in a BIFF file conforming to the profile.	CLEVEL 01: 000 CLEVEL 02: 000-100	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> The profile specified range is: <table style="margin-left: 20px;"> <tr> <td>CLEVEL 03:</td> <td>000-100</td> <td>Maximum aggregate size of all symbol segments in a file shall not exceed 1 MB -1</td> </tr> <tr> <td>CLEVEL 05-07:</td> <td>000-100</td> <td>Maximum aggregate size of all symbol segments in a file shall not exceed 2 MB -1</td> </tr> </table> In accordance with Annex C, Appendix 1, Table C-1-1, Field "NUMS" and Annex E, Table E-1, Fields "Number of CGM Graphic Segments per File" and "Aggregate Size of Graphic Segments". Note that NSIF uses the term Graphic Segments instead of Symbol Segments.	CLEVEL 03:	000-100	Maximum aggregate size of all symbol segments in a file shall not exceed 1 MB -1	CLEVEL 05-07:	000-100	Maximum aggregate size of all symbol segments in a file shall not exceed 2 MB -1				
CLEVEL 03:	000-100	Maximum aggregate size of all symbol segments in a file shall not exceed 1 MB -1													
CLEVEL 05-07:	000-100	Maximum aggregate size of all symbol segments in a file shall not exceed 2 MB -1													

Table 1 -- File Header Fields (continued)

FIELD	TYPE	CE / SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
LSSHn & LSn	C C	N/4 N/6	A pair of length values as specified in BIIF Table 1. The fields repeat (in pairs) the number of times identified by NUMS.	Calculated.	<input type="checkbox"/> X <input type="checkbox"/> Same as Model Profile
NUMX	R	N/3	Always 000 for all profiles.	000	<input type="checkbox"/> X <input type="checkbox"/> Same as Model Profile
NUMT	R	N/3	Profile shall specify the number or range of text segments allowed in a BIIF file conforming to the profile.	CLEVEL 01: 000 CLEVEL 02: 000-010	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> X <input type="checkbox"/> The profile specified range is: CLEVEL 03, 05-07 000-032 In accordance with Annex C, Appendix 1, Table C-1-1, Field "NUMT" and Annex E, Table E-1, Field "Number of Text Segments per File".
LTSHn & LTn	C C	N/4 N/5	A pair of length values as specified in BIIF Table 1. The fields repeat (in pairs) the number of times identified by NUMT.	Calculated.	<input type="checkbox"/> X <input type="checkbox"/> Same as Model Profile
NUMDES	R	N/3	Profile shall specify the number or range of data extension segments allowed in a BIIF file conforming to the profile. When DESs are allowed, the profile shall identify the specific DESs supported at the time of profile registration. Additional DES types can be added to the profile through the registration process.	CLEVEL 01: 000 CLEVEL 02: 000-010 Supported DESs: DESTAG: TRE_OVERFLOW DESTAG: TRANSPORTABLE _FILE_STRUCT	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> X <input type="checkbox"/> The profile specified range is: Number of allowed DES: CLEVEL 03: 20 CLEVEL 05-07 150 Supported DESs: Supported DESs are defined in the STANAG 4545 registry.
LDSHn & LDn	C C	N/4 N/9	A pair of length values as specified in BIIF Table 1. The fields repeat in pairs the number of times identified by NUMDES.	Calculated.	<input type="checkbox"/> X <input type="checkbox"/> Same as Model Profile
NUMRES	R	N/3	Profile shall specify the number or range of registered extension segments allowed in a BIIF file conforming to the profile. When RESs are allowed, the profile shall identify the specific RESs supported at the time of profile registration. Additional RES types may be added to the profile through the registration process.	CLEVEL 01: 000 CLEVEL 02: 000 Supported RESs: None	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> X <input type="checkbox"/> The profile specified range is: CLEVEL 03, 05-07 000 Supported RESs: NONE
LRSn & LRn	C C	N/4 N/7	A pair of length values as specified in BIIF Table 1. The fields repeat in pairs the number of times identified by NUMRES.	Calculated.	<input type="checkbox"/> X <input type="checkbox"/> Same as Model Profile
UDHDL	R	N/5	As specified in BIIF Table 1 for all profiles.	Calculated.	<input type="checkbox"/> X <input type="checkbox"/> Same as Model Profile
UDHOFL	C	N/3	As specified in BIIF Table 1 for all profiles.	Calculated.	<input type="checkbox"/> X <input type="checkbox"/> Same as Model Profile

Table 1 -- File Header Fields (continued)

FIELD	TYPE	CE / SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
UDHD	C/PVU		As specified in BIIF Table 1 for all profiles.	Any tagged record extension general to the BIIF file.	<input type="checkbox"/> <input checked="" type="checkbox"/> Same as Model Profile Select all that apply: <input type="checkbox"/> TREs are prohibited <input type="checkbox"/> Any Public TRE <input type="checkbox"/> Any Private TRE <input type="checkbox"/> Allowed Public TREs List: <input type="checkbox"/> Allowed Private TREs List: Specify constraints:
XHDL	RPVV	N/5	As specified in BIIF Table 1 for all profiles.	Calculated.	<input type="checkbox"/> <input checked="" type="checkbox"/> Same as Model Profile
XHDLOFL	C	N/3	As specified in BIIF Table 1 for all profiles.	Calculated.	<input type="checkbox"/> <input checked="" type="checkbox"/> Same as Model Profile
XHD	C/PVU		As specified in BIIF Table 1 for all profiles.	Any tagged record extension general to the BIIF file.	<input type="checkbox"/> <input checked="" type="checkbox"/> Same as Model Profile Select all that apply: <input type="checkbox"/> TREs are prohibited <input type="checkbox"/> Any Public TRE <input type="checkbox"/> Any Private TRE <input type="checkbox"/> Allowed Public TREs List: <input type="checkbox"/> Allowed Private TREs List: Specify constraints:

7.4.2 NSIF Security Fields. Table 2 is the pro forma for profile specification of NSIF security fields.

Table 2 -- Security Fields Specification

FIELD	TYPE	CE / SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
FSEC ISCSEC SSSEC TSSEC DESSEC RESSEC	R R R R R R	U8/ 167 U8/ 167 U8/ 167 U8/ 167 U8/ 167	The profile definition for security-related fields shall be identical for all header and subheaders (FSEC, ISCSEC, SSEC, TSSEC, DESSEC, RESSEC). The profile definition may define subfields and associated constraints using this table.	The model profile specification for subfields is as described below.	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input checked="" type="checkbox"/> The profile specific definition and constraints are specified in the Profile Specification for NSIF01.00 below.

Table 2 -- Security Fields Specification (continued)					
MODEL PROFILE SPECIFICATION					
SUB FIELD	TYPE	CE/ SIZE	DESCRIPTION	VALUE RANGE	NOTES
SEC1	R	A/1	Security code applicable to the entire file. The only defined code for the model profile is: U - Unspecified.	U	The model profile does not detail specific file security parameters.
SEC2	R	U8/166	Free form text. Any set of UTF-8 characters is allowed. Default entry is all BCS-A spaces.	Any BCS-A. Default is all BCS-A spaces.	
Table 2 -- Security Fields Specification (continued)					
NEW PROFILE SPECIFICATION FOR NSIF01.00					
(NOTE: x = F, I, S, T, D, R; depending on which header or subheader is referred to.)					
SUB FIELD	TYPE	CE/ SIZE	DESCRIPTION	VALUE RANGE	NOTES
xSCLAS	R	A/1	<u>File Security Classification</u> . Security code applicable to the file (or segment).	U = Unclassified R = Restricted C = Confidential S = Secret T = Top Secret	
NOTE: If FSCAS is T, S, C, or R then FSCLSY must be populated with a valid code for the security classification system used					
xSCLSY	R	A/2	<u>Security Classification</u> . This field shall contain valid values indicating the national or multinational security system used to classify the file (or segment). If this field is all BCS spaces (code 0X20), it shall imply that no security classification system applies to the file (or segment).	Allowed values include: BE = Belgium CA = Canada DA = Denmark FR = France GM = Germany GR = Greece IC = Iceland IT = Italy LU = Luxembourg NL = Netherlands NO = Norway PO = Portugal SP = Spain TU = Turkey UK = United Kingdom US = United States NS = NATO	(Default is spaces) Note: The country codes listed come from FIPS 10-4 except for the value NS. For the purposes of this profile, the value NS is used as an accumulative code designating all NATO nations.
xSCODE	R	A/11	<u>Codewords</u> . This field shall contain a valid indicator (typically a digraph) of the security compartments associated with the file (or segment). Multiple entries shall be separated by a single space (code 0x20). Applicable codewords are those defined by the security guidelines of the country or treaty Organisation designated in the xSCLSY field. If this field is all BCS spaces (code 0x20), it shall imply that no codewords apply to the file (or segment).	Country or treaty Organisation specific.	Allowed codewords are as designated by applicable policy and shown in Annex C, Appendix 1, Tables C-1-4 and C-1-4(A). (Default is spaces)

Table 2 -- Security Fields Specification (continued) NEW PROFILE SPECIFICATION FOR NSIF01.00					
(NOTE: x = F, I, S, T, D, R; depending on which header or subheader is referred to.)					
SUB FIELD	TYPE	CE/ SIZE	DESCRIPTION	VALUE RANGE	NOTES
xSCTLH	R	A/2	<u>Control & Handling.</u> This field shall contain valid security control and/or handling instructions associated with the file (or segment).	Values include digraphs used by the designated security system. If this field is all BCS spaces, it shall imply that no additional control and handling instructions apply to the file (or segment).	Allowed codewords are as designated by applicable policy and are shown in Annex C, Appendix 1, Tables C-1-4 and C-1-4(A). (Default is spaces) Note: Security System digraphs are not to be interpreted as the classification of the file.
xSREL	R	A/20	<u>Releasing Instructions.</u> This field shall contain a valid list of countries to which the NSIF File is valid for release.	Valid items in the list are one or more country codes found in FIPS 10-4. Multiple code entries will be separated by BCS spaces (code 0x20). If this field is all BCS spaces, it shall imply that no file release instructions apply.	(Default is spaces)
xSDCTP	R	A/2	<u>Declassification Type.</u> This field shall contain a valid indicator of the type of security declassification or downgrading instructions which apply to the file.	Valid values are: DD=declassify on a specific date DE=declassify upon occurrence of an event GD=downgrade to a specified level on a specific date GE=downgrade to a specified level upon occurrence of an event, O=Originating Agency's Determination Required (OADR) X=exempt from automatic declassification If this field is all BCS spaces (code 0x20), it shall imply that no security declassification or downgrading instructions apply.	(Default is spaces)
xSDCDT	R	A/8	<u>Declassification Date.</u> This field shall indicate the date on which the file (or segment) is to be declassified if the value in Declassification Type is DD. If this field is all BCS spaces (code 0x20), it shall imply that no file (segment) declassification date applies	For xSDCTP = DD apply (CCYYMMDD) Else BCS Spaces	Century, Year, Month, Day (Default is spaces)

Table 2 -- Security Fields Specification (continued) NEW PROFILE SPECIFICATION FOR NSIF01.00					
(NOTE: x = F, I, S, T, D, R; depending on which header or subheader is referred to.)					
SUB FIELD	TYPE	CE/ SIZE	DESCRIPTION	VALUE RANGE	NOTES
xSDCXM	R	A/4	<u>Declassification Exemption</u> . This field shall indicate the reason the NSIF File (or segment) is exempt from automatic declassification if the value of the FSDCTP field is X. If this field is all BCS Spaces (code 0x20), it shall imply that a NSIF File (or segment) Declassification Exemption does not apply.	Valid values include: X1 to X8, X251 to X259 Other values are command or group specific as designated by applicable security policy and directives. (Default is BCS Spaces (0x20)).	(Default is spaces) . This field is not for general use but may be employed by some national systems. Note: X1 to X8 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-202b(1) to (8) for material exempt from the 10-year rule. X251 to X259 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-301a(1) to (9) for permanently valuable material exempt from the 25-year declassification system.
xSDG	R	A/1	<u>Downgrade</u> . This field shall indicate the classification level to which a file (or segment) is to be downgraded if the values in field xSDCDT are GD or GE.	S = Secret C = Confidential R = Restricted If this field is all BCS spaces (code 0x20), it shall imply that file (or segment) security downgrading does not apply.	(Default is spaces)
xSDGDT	R	A/8	<u>Downgrade Date</u> . This field shall indicate the date on which a file (or segment) is to be downgraded if the value in field xSDCTP is GD.	CCYYMMDD If this field is all BCS spaces (code 0x20), it shall imply that a file (segment) security downgrading date does not apply.	(Default is spaces)
xSCLTX	R	U8/43	<u>Classification Text</u> . This field shall be used to provide additional information about file classification to include identification of a declassification or downgrading event if the value in Subfield xSDCTP are DE or GE. It may also be used to identify multiple classification sources and/or any other special handling rules.	Values are user defined free text. If this field is all BCS spaces (code 0x20), it shall imply that additional information about classification does not apply.	Characters are constrained to the BCS-A subset of characters. Default is spaces
xSCATP	R	A/1	<u>Classification Authority Type</u> . This field shall indicate the type of authority used to classify the file (or segment).	O =original classification authority D =derived from a single source M =derived from multiple sources. If this field is all BCS spaces (code 0x20), it shall imply that classification authority type does not apply.	(Default is spaces) When populated with O, D, or M, identify the Classification Authority in xSCAUT.

Table 2 -- Security Fields Specification (continued) NEW PROFILE SPECIFICATION FOR NSIF01.00					
(NOTE: x = F, I, S, T, D, R; depending on which header or subheader is referred to.)					
SUB FIELD	TYPE	CE/ SIZE	DESCRIPTION	VALUE RANGE	NOTES
xSCAUT	R	U8/40	<p><u>Classification Authority.</u> This field shall identify the Classification Authority for the NSIF File (or segment) dependent upon the value of the xSCATP field. Values are user-defined free text which should contain the following information: original Classification Authority name and position or personal ID if the value of the xSCATP field is O; title of the document or security classification guide used to classify the NSIF File (or segment) if the value of the xSCATP field is D; and Deriv-Multiple if the NSIF File (or segment) classification was derived from multiple sources and the value of the xSCATP field is M. In the latter case, the NSIF File originator will maintain a record of the sources used in accordance with existing security directives. One of the multiple sources may also be identified by the xSCLTX field if desired.</p>	<p>User Defined Free Text. If this field is all BCS Spaces (code 0x20), it shall imply that a NSIF File Classification Authority does not apply.</p>	<p>Any BCS-A character within the following ranges (0020 – 007E)</p> <p>Default is spaces</p> <p>This field is not for general use but may be employed by some national systems. It shall be populated when xSCATP contains a value other than a space.</p>
xSCRSN	R	A/1	<p><u>Classification Reason.</u> This field shall contain values indicating the reason for classifying the NSIF File (or segment).</p>	<p>Valid values include: BCS characters A – G, or space.</p> <p>Other values are command or group specific as designated by applicable security policy and directives.</p> <p>If this field is all BCS spaces (code 0x20), it shall imply that no file (or segment) classification reason applies.</p>	<p>(Default is spaces)</p> <p>This field is not for general use but may be employed by some national systems.</p> <p>The values A-G correspond to the reasons for original classification per E.O. 12958, Section 1.5.(a) to (g).</p>
xSSRDT	R	A/8	<p><u>Security Source Date.</u> This field shall indicate the date of the source used to derive the classification of the NSIF File (or segment). In the case of multiple sources, the date of the most recent source shall be used.</p>	<p>For xSCATP = O CCYYMMDD is required, else BCS spaces (0x20).</p> <p>If this field is all BCS spaces, it shall imply that a file security source date does not apply.</p>	<p>(Default is spaces)</p> <p>This field is not for general use but may be employed by some national systems.</p>

Table 2 -- Security Fields Specification (continued) NEW PROFILE SPECIFICATION FOR NSIF01.00					
(NOTE: x = F, I, S, T, D, R; depending on which header or subheader is referred to.)					
SUB FIELD	TYPE	CE/ SIZE	DESCRIPTION	VALUE RANGE	NOTES
xSCLTN	R	A/15	<u>Security Control Number.</u> This field shall contain a valid Security Control Number associated with the NSIF File. The format of the Security Control Number shall be in accordance with the regulations governing the appropriate security channel(s).	Security Control Number, else BCS spaces (0x20) If this field is all BCS spaces (code 0x20), it shall imply that no file security control number applies.	(Default is spaces) This field is not for general use but may be employed by some national systems.

7.4.3 NSIF Image Subheader Fields

Table 3 is the NSIF for profile specification of BIIF image subheader fields.

Table 3 -- Image Subheader Fields					
FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
IM	R	A/2	Always IM for all profiles.	IM	<input type="checkbox"/> X <input type="checkbox"/> Same as Model Profile
IID	R/PVU	A/10	Any BCS-A string is allowed. Profile may specify further constraints.	Any BCS-A string.	Select ONE of the following: <input type="checkbox"/> X <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> The following are profile specific constraints:
IDATIM	R	N/14	As specified in BIIF Table 3 for all profiles.	CCYYMMDDhhmmss	<input type="checkbox"/> X <input type="checkbox"/> Same as Model Profile
IINFO	R/PVU	U8/97	Any UTF-8 string is allowed. The profile definition may define subfields and associated constraints.	Any BCS-A string.	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> X <input type="checkbox"/> The following are profile specific constraints: IINFO is divided into two subfields: TGTID (Target ID): IID2 (Image ID2) In accordance with Annex C, Appendix 1, Table C-1-3, Field "TGTID" and "IID2".
ISCSEC	R/PVU	U8/167	As specified in BIIF Table C.2.	As specified in BIIF Table C.2.	As specified in Table 2 for the NSIF01.00 profile.

Table 3 -- Image Subheader Fields (continued)

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
ENCRYP	R/PVU	A/1	Any BCS-A character code is allowed. Profile shall define the meaning of each code.	0 = not encrypted.	Select ONE of the following: __X__ Same as Model Profile _____ The following are profile specific constraints:
ISORCE	R/PVU	U8/42	Any UTF-8 string is allowed. The profile definition may define subfields and associated constraints.	Any BCS-A string.	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-3, Field "ISORCE".
NROWS	R/PVV	N/8	Profile shall specify the range for the number of rows of pixel values allowed in a BIF file conforming to the profile.	CLEVEL 01: 00000001- 00001024 CLEVEL 02: 00000001- 00002048	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: CLEVEL 03: 00000002-00002048 CLEVEL 05: 00000002-00008192 CLEVEL 06: 00000002-00065535 CLEVEL 07: 00000002 to 99999999 In accordance with Annex C, Appendix 1, Table C-1-3, Field "NROWS" and Annex E, Table E-1, Field "Image Size".
NCOLS	R/PVV	N/8	Profile shall specify the range for the number of columns of pixel values allowed in a BIF file conforming to the profile.	CLEVEL 01: 00000001- 00001024 CLEVEL 02: 00000001- 00002048	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: CLEVEL 03: 00000002-00002048 CLEVEL 05: 00000002-00008192 CLEVEL 06: 00000002-00065535 CLEVEL 07: 00000002 to 99999999 In accordance with Annex C, Appendix 1, Table C-1-3, Field "NCOLS" and Annex E, Table E-1, Field "Image Size".

Table 3 -- Image Subheader Fields (continued)

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
PVTYPE	R/PVV	A/3	Select from the following allowed values: B INT SI R C	CLEVEL 01: INT CLEVEL 02: B INT	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-3, Field "PVTYPE".
IREP	R/PVV	A/8	Select from the following values: MONO RGB RGB/LUT HIS CMY CMYK YIQ YUV YCbCr CIE 1D 2D ND MULTI PIKS1, PIKS2, PIKS3, PIKS4 ---and/or--- Specify additional values and their specified use.	CLEVEL 01: MONO PIKS CLEVEL 02: MONO RGB RGB/LUT YCbCr PIKS1	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-3, Field "IREP" and Annex C, Appendix 1, Table C-1-2.
ICAT	R/PVU	A/8	Select from the following values: VIS - Visual imagery SL - Side looking radar TI - Thermal infrared FL - Forward looking IR RD - Radar EO - Electro-optical OP - Optical HR - High res. radar HS - Hyperspectral CP - Colour frame photo BP - Black/white photo SAR - Synthetic Aperture Radar SARIQ - SAR radio hologram IR - Infrared MS - Multi-spectral FP - Finger prints MRI - Magnetic Resonance imagery XRAY - x-rays CAT - CAT scan MAP - Raster map PAT - Colour patch LEG - Legend DTEM - Elevation model data MATR - general matrix data LOCG - Location grids ---and/or--- Specify additional values and their specified use.	CLEVEL 01: VIS CLEVEL 02: Select from the following list: VIS EO SAR IR MRI XRAY CAT MAP PAT LEG	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-3, Field "ICAT" and Annex C, Appendix 1, Table C-1-2(A).

Table 3 -- Image Subheader Fields (continued)

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
ABPP	R/PVV	N/2	Select from the following options: 01, 04, 08, 09, 10, 11, 12, 16, 32, 64, 01-08, 09-16, 17-32, 33-64, 65-96 ----and/or---- Specify additional values and their specified use.	CLEVEL 01: 08 CLEVEL 02: 01, 08, 09, 10, 11, 12	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-3, Field "ABPP".
PJUST	R/PVV	A/1	Select from the following options: R L	R	__X__ Same as Model Profile
ICORDS	R/PVV	A/1	Space Character - or - Specify and define codes	CLEVEL 01: Space CLEVEL 02: Space	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-3, Field "ICORDS".
IGEOL0	C/PVU	A/60	For each code specified in ICORDS, define the content and structure of this field.	Omitted.	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-3, Field "IGEOL0".
NICOM	R/PVV	N/1	Select any range within 0-9.	0-9	Select ONE of the following: __X__ Same as Model Profile _____ The following are profile specific constraints:
ICOMn	C/PVU	U8/80	Any UTF-8 string is allowed. Profile may specify further constraints.	Any BCS-A string.	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-3, Field "ICOMn".

Table 3 -- Image Subheader Fields (continued)

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
IC	R/PVV	A/2	<p>Any BCS-A string is allowed to identify the type of compression used in the image data field. The character M is reserved for use to indicate that pixel mask(s) have been included in the image data field. Reference must be made to the specification document describing the compression.</p> <p>Representative values are: NC - uncompressed NM - uncompressed with pixel mask tables</p>	<p>CLEVEL 01: NC – Uncompressed</p> <p>CLEVEL 02: NC- Uncompressed</p> <p>NM – Uncompressed with mask table(s).</p> <p>C1/M1 - Bi-Tonal compression per ITU-T T.4, AMD2 08/95</p> <p>C3/M3 - JPEG lossy DCT compression per ISO/IEC 10918-1 and ISO/IEC 10918-3.</p> <p>C4/M4 – Vector Quantization as outlined in Appendix B</p> <p>C5/M5 - JPEG lossless compression per ISO/IEC 10918-1 and ISO/IEC 10918-3.</p>	<p>Select ONE of the following: _____ Same as Model Profile</p> <p>__X__ The following are profile specific constraints:</p> <p>In accordance with Annex C, Appendix 1, Table C-1-3, Field "IC".</p>

Table 3 -- Image Subheader Fields (continued)

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
COMRAT	C/PVU	A/4	<p>The field is omitted when IC=NC or IC=NM.</p> <p>When present, the profile shall describe the use of the field for describing compression rate related information.</p>	<p>This conditional field is only present when the IC code is other than NC or NM.</p> <p>ELSE:</p> <p>For C1/M1: 1D - one dimensional coding 2DS- two dimensional coding, standard vertical resolution (K=2) 2DH- two dimensional coding, high vertical resolution (K=4) See ITU-T T.4, AMD2 08/95</p> <p>For C3/M3 the value is always 00.0.</p> <p>For C4/M4 the value is in the form of nn.n representing the appropriate number of bits per pixel for the compressed image.</p> <p>For C5/M5 the value is always 0.00.</p>	<p>Select ONE of the following:</p> <p>_____ Same as Model Profile</p> <p>__X__ The following are profile specific constraints:</p> <p>In accordance with Annex C, Appendix 1, Table C-1-3, Field "COMRAT".</p>
NBANDS	R/PVV	A/1	<p>Identify allowed values from:</p> <p>0 1-9 T</p>	<p>CLEVEL 01: 1</p> <p>CLEVEL 02: 1 3</p>	<p>Select ONE of the following:</p> <p>_____ Same as Model Profile</p> <p>__X__ The following are profile specific constraints:</p> <p>In accordance with Annex C, Appendix 1, Table C-1-3, Field "NBANDS" and Annex E, Table E-1 for limits on bands and relationship to other parameters.</p>

Table 3 -- Image Subheader Fields (continued)

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
XBANDS	C/PVV	N/5	Conditional field; omitted unless NBANDS=0.	CLEVEL 01: Not used. CLEVEL 02: Not used.	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: CLEVEL 03: 2-9 bands CLEVEL 05-06: 2 – 255 bands CLEVEL 07: 2 – 999 bands In accordance with Annex C, Appendix 1, Table C-1-3, Field "XBANDS" and Annex E, Table E-1 for limits on bands and relationship to other parameters.
NOTE: The fields IREPbANDn through LUTnm repeat the number of times indicated in the NBANDS field or the XBANDS field.					
IREPBAN Dn	R/PVV	A/2	Identify allowed value(s) for each band which further identifies the significance of the band as related to the value in the IREP field.	For IREP=MONO, two spaces. For IREP=RGB, R, G, B. For IREP=RGB/LUT two spaces. For IREP=YCbCr Y, Cb, Cr. For IREP=PIKS two spaces.	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-3, Field "IREPBANDn" and Annex C, Appendix 1, Table C-1-2.
ISUBCAT n	R/PVU	A/6	Identify allowed value(s) for each band which further identifies the significance of the band as related to the value in the ICAT field.	For all values of ICAT, the value is six spaces.	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-3, Field "ISUBCATn" and Annex C, Appendix 1, Table C-1-2(A).
IFCn	C/PVU	A/1	Identify filter condition codes and the specification of the corresponding filter condition. The code N means there is no filter condition.	N	Select ONE of the following: __X__ Same as Model Profile _____ The following are profile specific constraints:
IMFLTn	C/PVU	A/3	Identify filter codes corresponding to each filter condition identified in IFCnn. If none, value is three spaces.	Three spaces.	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: This field is reserved for future use. It shall be filled with BCS spaces (code 0X20).

Table 3 -- Image Subheader Fields (continued)

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
NLUTSn	R/PVV	N/1	Identify the allowed range for specifying the number of look up tables (8-bit entries in each table) associated with the band. Typical values are: 0 - no LUTS. 1 - for translating NELUTS number of values to alternate 8-bit (or less) values. 2 - for translating NELUTS number of values into alternate values of 16 or less bits. 3 - For translating NELUTS number of values into alternate values of 24 or less bits.	CLEVEL 01: 0 CLEVEL 02: 0-3	Select ONE of the following: ____ Same as Model Profile __X__ The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-3, Field "NLUTSn" and Annex C, Appendix 1, Table C-1-2.
NELUTn	C	N/5	When NLUTn=00000, this field is omitted. Otherwise it specifies the number of 8-bit entries in each sequential LUT.	CLEVEL 01: Omitted. CLEVEL 02: Omitted when NLUTSn=0; otherwise 00001-32768	Select ONE of the following: ____ Same as Model Profile __X__ The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-3, Field "NELUTn".
LUTDn1	C/PVU	Derive d from Value NELU T1	This field shall be omitted if the nth Band number of LUTS is zero. Otherwise, this field shall contain the data defining the first look-up table for the nth image band. Multiple LUTs may be used to translate the index value into multiple octet values.	Data only	__X__ Same as Model Profile
LUTDnm	C/PVU	Derive d from Value NELU T1	This field shall be omitted if the nth Band number of LUTs is zero. Otherwise, this field shall contain the data defining the mth look-up table for the nth image band. Each entry in the look-up table is composed of one octet, ordered from most significant bit to least significant bit representing a value from 0 to 255.	Data only	__X__ Same as Model Profile
ISYNC	R/PVV	A/1	Identify indicator codes for each allowed end of row or end of column marker to be used. For each listed code, identify the specification for the sync code marker. The value 0 indicates no sync code is used.	0	Select ONE of the following: __X__ Same as Model Profile ____ The following are profile specific constraints:

Table 3 -- Image Subheader Fields (continued)

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
IMODE	R/PVV	A/1	IMODE codes are: B=Block interleaved R=Row interleaved P=Pixel Interleaved S=Band sequential	CLEVEL 01: B CLEVEL 02: B P R S	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: All CLEVELs: B, P, R, S In accordance with Annex C, Appendix 1, Table C-1-3, Field "IMODE".
NBPR	R/PVV	N/4	Identify the allowed range.	CLEVEL 01: 0001 CLEVEL 02: 0001-0064	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: For CLEVEL 03: 0001-2048 blocks For CLEVEL 05: 0001-8192 blocks For CLEVEL 06 and 07: 0001-9999 blocks In accordance with Annex C, Appendix 1, Table C-1-3, Field "NBPR" and Annex E, Table E-1, Field "Image Blocking".
NBPC	R/PVV	N/4	Identify the allowed range.	CLEVEL 01: 0001 CLEVEL 02: 0001-0064	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: For CLEVEL 03: 0001-2048 blocks For CLEVEL 05: 0001-8192 blocks For CLEVEL 06 and 07: 0001-9999 blocks In accordance with Annex C, Appendix 1, Table C-1-3, Field "NBPC" and Annex E, Table E-1, Field "Image Blocking".
NPPBH	R/PVV	N/4	Identify the allowed range.	CLEVEL 01: 0001-2048 CLEVEL 02: 0001-8192	Select ONE of the following: _____ Same as Model Profile __X__ The following are profile specific constraints: For CLEVEL 03: 0001-2048 For CLEVELs 05-07: 0001-8192 In accordance with Annex C, Appendix 1, Table C-1-3, Field "NPPBH" and Annex E, Table E-1, Fields "Image Size" and "Image Blocking".

Table 3 -- Image Subheader Fields (continued)

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
NPPBV	R/PVV	N/4	Identify the allowed range.	CLEVEL 01: 0001-2048 CLEVEL 02: 0001-8192	Select ONE of the following: ____ Same as Model Profile __X__ The following are profile specific constraints: For CLEVEL 03: 0001-2048 For CLEVELs 05-07: 0001-8192 In accordance with Annex C, Appendix 1, Table C-1-3, Field "NPPBV" and Annex E, Table E-1, Fields "Image Size" and "Image Blocking".
NBPP	R	N/2	Select the allowed values from the following: 01 04 08 12 16 24 32 40 48 56 64 72 80 88 96 -- and/or -- specify additional values and specify use.	CLEVEL 01: 08 CLEVEL 02: 01 08 12 16	Select ONE of the following: ____ Same as Model Profile __X__ The following are profile specific constraints for all CLEVELs: In accordance with Annex C, Appendix 1, Table C-1-3, Field "NBPP" and Annex C, Appendix 1, Table C-1-2(A).
IDLVL	R	N/3	As specified in BIFF Table 3.	001-999	__X__ Same as Model Profile
IALVL	R	N/3	As specified in BIFF Table 3.	000-998	__X__ Same as Model Profile
ILOC	R	N/10	As specified in BIFF Table 3.	As specified in BIFF Table 3.	__X__ Same as Model Profile
IMAG	R	A/4	As specified in BIFF Table 3.	As specified in BIFF Table 3.	__X__ Same as Model Profile
UDIDL	R/PVV	N/5	As specified in BIFF Table 3 for all profiles.	Calculated.	__X__ Same as Model Profile
UDOFL	C	N/3	As specified in BIFF Table 3 for all profiles.	Calculated.	__X__ Same as Model Profile
UDID	C		As specified in BIFF Table 3 for all profiles.	Any tagged record extension specific to the image.	__X__ Same as Model Profile Select all that apply: ____ TREs are prohibited ____ Any Public TRE ____ Any Private TRE ____ Allowed Public TREs List: ____ Allowed Private TREs List: Specify constraints:

Table 3 -- Image Subheader Fields (continued)

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
IXSHDL	R/PVV	N/5	As specified in BIF Table 3 for all profiles.	Calculated.	<input type="checkbox"/> X <input type="checkbox"/> Same as Model Profile
IXSOFL	C	N/3	As specified in BIF Table 3 for all profiles.	Calculated.	<input type="checkbox"/> X <input type="checkbox"/> Same as Model Profile
IXSHD	C/PVU		As specified in BIF Table 3 for all profiles.	Any tagged record extension specific to the image.	<input type="checkbox"/> X <input type="checkbox"/> Same as Model Profile Select all that apply: <input type="checkbox"/> TREs are prohibited <input type="checkbox"/> Any Public TRE <input type="checkbox"/> Any Private TRE <input type="checkbox"/> Allowed Public TREs List: <input type="checkbox"/> Allowed Private TREs List: Specify constraints:

7.4.4 NSIF Image Data Mask Table

Table 4 is the NSIF for profile specification of BIF image data mask table fields.

Table 4 -- Image Data Mask Table

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF 01.00
When the profile specifies use of the image data mask table, the following fields all become applicable. See Table 3, field IC. When the image data mask table is not specified in the profile, none of the following fields apply.			When selected codes for the IC field include the character M, the specification of image data mask tables becomes required.	CLEVEL 01: Image data mask tables not used CLEVEL 02: Used as specified in BIIF Table 4.	Select ONE of the following: <u> X </u> Same as Model Profile: Used as specified in BIIF Table 4 of ISO/IEC 12087-5:1998, for all CLEVELs, 3, 5, 6, & 7. <u> </u> NO. Image data mask tables are not allowed for use within this profile.
IMDATOF	C	4	As specified in BIIF Table 4.	As specified in BIIF Table 4.	<u> X </u> Same as Model Profile
BMRLNTH	C	2	As specified in BIIF Table 4.	As specified in BIIF Table 4.	<u> X </u> Same as Model Profile
TMRLNTH	C	2	As specified in BIIF Table 4.	As specified in BIIF Table 4.	<u> X </u> Same as Model Profile
TPXCDLNTH	C	2	As specified in BIIF Table 4.	As specified in BIIF Table 4.	<u> X </u> Same as Model Profile
TPXCD	C	Note 1	As specified in BIIF Table 4.	As specified in BIIF Table 4.	<u> X </u> Same as Model Profile
BMRnnBN DmM	C	4	As specified in BIIF Table 4.	As specified in BIIF Table 4.	<u> X </u> Same as Model Profile
TMRnnBN Dmm	C	4	As specified in BIIF Table 4.	As specified in BIIF Table 4.	<u> X </u> Same as Model Profile

Note 1: The length of the TPXCD field is the next highest number of octets which can contain the number of bits identified in the TPXCDLNTH field (1 or 2 Octets) also as specified in BIIF Table 4.

7.4.5 NSIF Symbol Subheader Fields

Table 5 is the NSIF for profile specification of BIIF symbol subheader fields.

Table 5 -- Symbol Subheader Fields

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
SY	R	A/2	Always SY for all profiles.	SY	<u> X </u> Same as Model Profile Note: Also use term "Graphics" in NSIF01.00.
SID	R/PVU	A/10	Any BCS-A string is allowed. Profile may specify further constraints.	Any BCS-A string.	<u> X </u> Same as Model Profile
SNAME	R/PVU	U8/20	Any UTF-8 string is allowed. Profile may specify further constraints.	Any UTF-8 string.	Select ONE of the following: <u> </u> Same as Model Profile <u> X </u> The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-5, Field "SNAME".

Table 5 -- Symbol Subheader Fields (continued)

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
SSSEC	R/PVU	A/167	As specified in BIIF Table C.2.	As specified in BIIF Table C.2.	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> The following is profile specific unique: As specified in Table 2 for the NSIF01.00.
ENCRYP	R/PVU	A/1	Any BCS-A character is allowed. Profile shall define-the meaning of each code.	0 = not encrypted.	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> The following are profile specific constraints.
SFMT	R/PVV	A/1	This field contains a C indicating the symbol data field contains data structured according to ISO/IEC 8632, Computer Graphics Metafile (CGM). Additional symbol format codes may be added through the graphical item registration process.	C	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-5, Field "SFMT".
SSTRUCT	R/PVU	A/13	Any BCS-A string is allowed. The profile definition may define subfields and associated constraints.	000000000000	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> The following are profile specific constraints.
SDLVL	R	N/3	001-999	As specified in BIIF Table 6.	<input type="checkbox"/> Same as Model Profile
SALVL	R	N/3	000-998	As specified in BIIF Table 6.	<input type="checkbox"/> Same as Model Profile
SLOC	R	N/10	As specified in BIIF Table 6.	As specified in BIIF Table 6.	<input type="checkbox"/> Same as Model Profile
SLOC2	R/PVU	N/10	As specified in BIIF Table 6. Default is all zeros.	0000000000	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> The following are profile specific constraints: NSIF01.00 uses field for the following information : SBND1 See Annex C, Appendix 1, Table C-1-5, Field "SBND1".

Table 5 -- Symbol Subheader Fields (continued)

FIELD	TYPE	CE/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
SPARMS	R/PVU	A/13	Any BCS-A string is allowed. The profile definition may define subfields and associated constraints.	The 13 bytes are structured into two subfields as follows: Subfield: SCOLOR Name: Symbol Colour. This subfield contains a C if the symbol data contains colour or M if it is monochrome. Type: R CE/Size: A/1 Value Range: C, M Subfield: SRES2 Name: Reserved for future use. Type: R CE/Size: A/12 Value Range: 000000000000	Select ONE of the following: ____ Same as Model Profile __X__ The following are profile specific constraints: This field is divided into three subfields: SCOLOR, SBND2, SRES2 See Annex C, Appendix 1, Table C-1-5, Fields "SCOLOR", "SBND2", and "SRES2".
SXSHDL	R/PVU	N/5	As specified in BIIF Table 6 for all profiles.	Calculated.	Select ONE of the following: __X__ Same as Model Profile
SXSOFL	C	N/3	As specified in BIIF Table 6 for all profiles.	Calculated.	__X__ Same as Model Profile
SXSHD	C/PVU		As specified in BIIF Table 6 for all profiles.	Any tagged record extension specific to the symbol.	__X__ Same as Model Profile Select all that apply: ____ TREs are prohibited ____ Any Public TRE ____ Any Private TRE ____ Allowed Public TREs List: ____ Allowed Private TREs List: Specify constraints:

7.4.6 NSIF Text Subheader Fields

Table 6 is the pro forma for profile specification of NSIF text subheader fields.

Table 6 -- Text Subheader Fields

FIELD	TYPE	BCS/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
TE	R	A/2	Always TE for all profiles.	TE	<input checked="" type="checkbox"/> Same as Model Profile
TEXTID	R/PVU	A/10	Any BCS-A string is allowed. Profile may specify further constraints.	Any BCS-A string.	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input type="checkbox"/> The following are profile specific constraints: This field is divided into two fields for NSIF01.00: TEXTID, TXTALVL See Annex C, Appendix 1, Table C-1-6, Fields "TEXTID" and "TXTALVL".
TXTDT	R	N/14	As specified in BIIF Table 7.	CCYYMMDDhhmmss	<input checked="" type="checkbox"/> Same as Model Profile
TXTITL	R/PVU	U8/80	Any UTF-8 string is allowed. Profile may specify further constraints.	Any BCS-A string.	Select ONE of the following: <input checked="" type="checkbox"/> Same as Model Profile <input type="checkbox"/> The following are profile specific constraints:
TSSEC	R/PVU	U8/167	As specified BIIF Table C.2.	As specified in BIIF Table C.2.	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input checked="" type="checkbox"/> The following are profile specific constraints: As specified in Table 2 for the NSIF 01.00
TXTFMT	R	A/3	Any BCS-A code is allowed. Profile may specify further constraints. Representative values are: STA - Standard BCS. Any BCS characters are allowed in the text data field. UC2 - Standard UCS-2 UC4 - Standard UCS-4 UT1 - Standard UTF-1 UT8 - Standard UTF-8 For ISO 10646, specify the adopted form, implementation level, and subset. For other text formats, provide full specification of use.	CLEVEL 01: STA CLEVEL 02: STA UC4 with implementation level 3	Select ONE of the following: <input type="checkbox"/> Same as Model Profile <input checked="" type="checkbox"/> The following are profile specific constraints: In accordance with Annex C, Appendix 1, Table C-1-6, Field "TXTFMT".
TXSHDL	R/PVV	N/5	As specified in BIIF Table 7 for all profiles.	Calculated.	<input checked="" type="checkbox"/> Same as Model Profile
TXSOFL	C	N/3	As specified in BIIF Table 7 for all profiles.	Calculated.	<input checked="" type="checkbox"/> Same as Model Profile

Table 6 -- Text Subheader Fields (continued)

FIELD	TYPE	BCS/ SIZE	PROFILE OPTIONS & RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION Profile Name: NSIF01.00
TXSHD	C/PVU		As specified in BIIF Table 7 for all profiles.	Any tagged extension specific to the image.	<input type="checkbox"/> Same as Model Profile Select all that apply: <input type="checkbox"/> TREs are prohibited <input type="checkbox"/> Any Public TRE <input type="checkbox"/> Any Private TRE <input type="checkbox"/> Allowed Public TREs List: <input type="checkbox"/> Allowed Private TREs List: Specify constraints:

7.4.7 NSIF Tagged Record Extensions (TREs)

The pro forma for specification of TREs is shown in Table 7. The NSIF profile allows for the inclusion of any tagged record extension(s), as approved by the custodian of NATO STANAG 4545, and documented in the NSIF Extension Registry.

Table 7 -- Tagged Record Extensions

FIELD	TYPE	CE/ SIZE	OPTIONS & RULES	NAME/DESCRIPTI ON	VALUE RANGE SPECIFICATION
TRETAG	R	A/6	Unique name not already registered as specified in BIIF Table 8.	Unique extension type identifier.	
TREL	R	N/5	As specified in BIIF Table 8.	Length of TREDATA field.	
TREDATA	R	As specified by TREL	Extend this table to fully define the contents of the data field. Provide additional narrative if needed to provide a comprehensive description of the extension data.	Extension data.	

7.4.8 NSIF Extension Segments

7.4.8.1 NSIF Data Extension Segments (DESS)

The NSIF profile allows for the inclusion of data extension segments, as approved by the STANAG 4545 Custodian. See the NSIF Registry for the list of approved extensions.

Table 8a -- Data Extension Segment Pro forma

FIELD	TYPE	CE/SIZE	OPTIONS & RULES	NAME/DESCRIPTION	VALUE RANGE SPECIFICATION
DE	R	A/2	Always DE.	File part type.	DE
DESID	R	A/25	Unique BCS-A string not already registered.	Unique DES type identifier.	See the NSIF Registry.
DESVR	R	N/2	Version identifier.	Version of the DESTAG.	See the NSIF Registry.
DESEC	R	U8/167	Not defined when registering the DES. The structure and parameters shall be those specified in BIIF Table C.2 for the BIIF profile of the file in which the DES appears.	Security specific parameters.	In accordance with the fields defined in Table 2., NSIF Profile 01.00.
DESOFLW	C/PVV	A/6	As specified in BIIF Table 10.	Overflowed header type.	See the NSIF Registry.
DESITEM	C	N/3	As specified in BIIF Table 10.	Data item reference.	See the NSIF Registry.
DESSL	R	N/4	As specified in BIIF Table 10.	Length of profile defined subheader fields.	See the NSIF Registry.
DESSH	C	Specified in DESSL	Extend this table to fully define each subfield applicable to the DES.	Profile defined subheader fields.	See the NSIF Registry.
DESDATA	R/PVU	Per value from file header	Extend this table to fully define the contents of the data field. Provide additional narrative if needed to provide a comprehensive description of the DES.	Profile defined data field.	See the NSIF Registry.

7.4.8.2 NSIF Reserved Extension Segments (RESs)

There shall be no Reserved Extension Segments used in this profile of BIIF.

Table 8b -- Reserved Extension Segment Pro forma

FIELD	TYPE	CE/SIZE	OPTIONS & RULES	NAME/DESCRIPTION	VALUE RANGE SPECIFICATION
RE	R	A/2	Always RE.	File part type.	Not Applicable – No Reserved Extension Segments Are Permitted Under NSIF01.00.

7.4.9 NSIF TFS Requirements

There shall be no TFS implementation for this profile of BIIF.

Table 9 – TFS Profile Pro forma Table

TABLE ENTRY #	TFS COMMAND	BIIF TFS MODEL PROFILE	NEW PROFILE SPECIFICATION
1	Profile Name	BIIF-TFS	Not Applicable – No TFS Implementation Is Permitted Under NSIF01.00.

7.4.10 Implementation Support Requirements

Specific implementation support requirements are defined in the Annexes to this profile.

Table 10 – Implementation Support Requirements

PROFILE OPTIONS AND RULES	MODEL PROFILE	NEW PROFILE SPECIFICATION NAME: NSIF01.00
<p>As specified in BIF paragraph 5.4, requirements shall be expressed in a manner that is testable.</p>	<p>1. The Model Profile imposes no further constraints for:</p> <ul style="list-style-type: none"> - Image productive fidelity - Compression/quality goals - Content transforms <p>Special handling or processing rates or application semantics.</p> <p>2. An implementation capable of producing BIF Model Profile compliant files shall ensure that all such producer files are fully within the constraints of the applicable complexity level of the Model Profile. A producer need not support the full extent of allowable options within the profile.</p> <p>3. An implementation capable of interpreting the Model Profile may implement complexity level 01 only or both complexity levels 01 and 02. The implementation shall be able to interpret and use any model profile compliant file for the complexity level implemented.</p>	<p>1. The NSIF Profile imposes no further constraints for:</p> <ul style="list-style-type: none"> - Image productive fidelity - Compression/quality goals - Content transforms <p>Special handling or processing rates or application semantics.</p> <p>2. An implementation capable of producing NSIF Profile compliant files shall ensure that all such producer files are fully within the constraints of the applicable complexity level of the NSIF Profile. A producer need not support the full extent of allowable options within the profile.</p> <p>3. An implementation capable of interpreting the NSIF Profile may implement complexity level 03 only; complexity levels 03 and 05 only; complexity levels 03, 05, and 06 only; or all complexity levels 03, 05, 06 and 07. The implementation shall be able to interpret and use any NSIF Profile compliant file for the complexity level implemented.</p>

ANNEX A. TERMS AND DEFINITIONS

1. Acronyms. The following acronyms are used for the purpose of this agreement.

a.	ALVL	-	Attachment Level
b.	API	-	1. Application Program Interface 2. Auxiliary Parameter Identifier
c.	BARO	-	Barometric Pressure
d.	BCS	-	Basic Character Set
e.	BCS-A	-	Basic Character Set-Alphanumeric
f.	BCS-N	-	Basic Character Set-Numeric
g.	BE	-	Basic Encyclopaedia
h.	BIIF	-	Basic Image Interchange Format (ISO/IEC IS 12087-5)
i.	BP	-	Black/white frame Photography
j.	C	-	Conditional
k.	CAT	-	CAT Scan (Computerised Axial Tomography Scan)
l.	CCS	-	Common Coordinate System
m.	CE	-	Controlled Extension
n.	CEADATA	-	CE User-Defined Data
o.	CETAG	-	CE Unique Extension Type Identifier
p.	CGM	-	Computer Graphics Metafile
q.	CLEVEL	-	Complexity Level
r.	CP	-	Colour frame Photography
s.	CRT	-	Cathode Ray Tube
t.	CURRENT	-	Water Current
u.	C ³ I	-	Command, Control, Communications, and Intelligence
v.	DEPTH	-	Water Depth
w.	DES	-	Data Extension Segment
x.	DESDATA	-	DES User-Defined Data Field
y.	DESITEM	-	DES Data Segment Overflowed
z.	DESOFLOW	-	DES Overflowed Header Type

aa.	DESSHF	-	DES User-Defined Subheader Fields
ab.	DESSHL	-	DES User-Defined Subheader Length
ac.	DFAD	-	Digital Feature Analysis Data
ad.	DGIWG	-	Digital Geographic Information Working Group
ae.	DIGEST	-	Digital Geographic Information Exchange Standard (http://www.digest.org)
af.	DIS	-	Draft International Standard
ag.	DLVL	-	Display Level
ah.	DMA	-	Defence Mapping Agency
ai.	DOD	-	Department of Defence of the United States
aj.	DTED	-	Digital Terrain Elevation Data
ak.	DTEM	-	Digital Terrain Elevation Models
al.	ECS	-	Extended Character Set
am.	ECS-A	-	Extended Character Set-Alphanumeric
an.	EEI	-	1. External Environment Interface 2. Essential Elements of Information
ao.	ENCRYP	-	Encryption
ap.	EO	-	Electro-Optical
aq.	FIPS PUB	-	Federal Information Processing Standard Publication
ar.	FL	-	1. File Length 2. Forward Looking infrared
as.	FSCLAS	-	File Security Classification
at.	FTITLE	-	File Title
au.	FP	-	Fingerprints
av.	Gb	-	Gigabits
aw.	GB	-	Gigabytes
ax.	GEOSDE	-	Geospatial Support Data Extensions
ay.	GS	-	Graphic Segment
az.	HL	-	NSIF File Header Length
ba.	HR	-	High Resolution Radar
bb.	HS	-	Hyperspectral

bc.	I	-	Inphase
bd.	IC	-	Image Compression
be.	ID	-	Identifier
bf.	IEC	-	International Electrotechnical Commission
bg.	IEEE	-	Institute of Electrical and Electronic Engineers
bh.	IALVL	-	Image Attachment Level
bi.	IDLVL	-	Image Display Level
bj.	IC	-	Image Compression
bk.	ICAT	-	Image Category
bl.	ICORDS	-	Image Coordinate Representation
bm.	IGEOLO	-	Image Geographic Location
bn.	ILOC	-	Image Location
bo.	IMODE	-	Image Mode
bp.	IR	-	Infrared
bq.	IREP	-	Image Representation
br.	IREPBANDn	-	n th Band Representation
bs.	IS	-	1. International Standard 2. Image Segment
bt.	ISO	-	International Organisation for Standardization
bu.	ISUBCATn	-	n th Band Subcategory
bv.	ITU	-	International Telecommunication Union
bw.	IXSHD	-	Image Extended SubHeader Data
bx.	JPEG	-	Joint Photographic Experts Group
by.	JITC	-	Joint Interoperability Test Command
bz.	LDn	-	Length of n th Data Extension Segment
ca.	LEG	-	Legends
cb.	LIn	-	Length of n th Image Segments
cc.	LISHn	-	Length of n th Image SubHeader
cd.	LOC	-	Location
ce.	LOCG	-	Location Grid

cf.	LSB	-	Least Significant Bit
cg.	LSn	-	Length of n th Graphic Segment
ch.	LSSHn	-	Length of n th Graphic SubHeader
ci.	LTn	-	Length of n th Text Segment
cj.	LTSHn	-	Length of n th Text SubHeader
ck.	LUT	-	Look-Up Table
cl.	M	-	Magnitude
cm.	MAP	-	Raster Maps
cn.	MAS	-	Military Agency for Standardization
co.	MATR	-	Matrix Data
cp.	Mb		Megabits
cq.	MB		Megabytes
cr.	MGRS	-	Military Grid Referencing System
cs.	MIL-STD	-	Military Standard
ct.	MONO	-	Monochrome
cu.	MPEG	-	Motion Picture Experts Group
cv.	MPEG 1	-	Motion Picture Experts Group 1 (ISO/IEC 11172-1)
cw.	MPEG 2	-	Motion Picture Experts Group 2 (ISO/IEC 13818-1)
cx.	MRI	-	Magnetic Resonance Imagery
cy.	MS	-	Multispectral
cz.	MSB	-	Most Significant Bit
da.	MTF	-	Message Text Format (STANAG 5500)
db.	MULTI	-	Multiband Imagery
dc.	N	-	UTM/UPS Northern Hemisphere (ICORDS Field Value)
dd.	NATO	-	North Atlantic Treaty Organisation
de.	NBPC	-	Number of Blocks Per Column
df.	NBPP	-	Number of Bits Per Pixel per band
dg.	NBPR	-	Number of Blocks Per Row
dh.	NICOM	-	Number of Image Comments
di.	NIMA	-	National Imagery and Mapping Agency

dj.	NITF	-	National Imagery Transmission Format
dk.	NODISPLY	-	Image not intended for display
dl.	NOSE	-	NATO Open Systems Environment
dm.	NOSIP	-	NATO Open System Interconnection Profile
dn.	NPPBH	-	Number of Pixels Per Block Horizontal
do.	NPPBV	-	Number of Pixels Per Block Vertical
dp.	NSIF	-	NATO Secondary Imagery Format
dq.	NSIFS	-	NATO Secondary Imagery Format Standard
dr.	NVECTOR	-	Vector with Cartesian coordinates
ds.	NUMDES	-	Number of Data Extension Segments
dt.	NUMI	-	Number of Images
du.	NUMS	-	Number of Graphics Segments
dv.	NUMRES	-	Number of Reserved Extension Segments
dw.	NUMT	-	Number of Text Segments
dx.	NUMX	-	NSIF File Header field reserved for future use
dy.	OADR	-	Originating Agency's Determination is Required
dz.	ONAME	-	Originator's Name
ea.	OP	-	Optical
eb.	OPHONE	-	Originator's Phone Number
ec.	OSE	-	Open System Environment
ed.	OSI	-	Open Systems Interconnect model
ee.	Q	-	Quadrature
ef.	P	-	Phase
eg.	PAT	-	Colour Patch
eh.	PJUST	-	Pixel Justification
ei.	POLAR	-	Vectors with polar coordinates
ej.	POSIX	-	Portable Operating System Interface
ek.	PVTYPE	-	Pixel Value Type
el.	R	-	1. Required 2. Red

em.	RD	-	Radar
en.	RECMN	-	Recommendation
eo.	RE	-	Registered Extension
ep.	REDATA	-	RE User-Defined Data
eq.	RES	-	Reserved Extension Segment
er.	RESDATA	-	RES User-Defined Data
es.	RESSHF	-	RES User-Defined Subheader Fields
et.	RESSHL	-	RES User-Defined Subheader Length
eu.	RETAG	-	RE Unique Extension Type Identifier
ev.	RGB	-	Red, Green, Blue (components from video standardization)
ew.	RGB/LUT	-	Mapped colour
ex.	RS	-	Reserved Segment(s)
ey.	Rsets	-	Reduced Resolution Data Sets
ez.	S	-	(1) band Sequential (IMODE field value) (2) UTM/UPS Southern Hemisphere (ICORDS field value) (3) Secret (security fields value)
fa.	SALVL	-	Graphic Display Level
fb.	SAR	-	Synthetic Aperture Radar
fc.	SARIQ	-	SAR radio hologram
fd.	SBND	-	Symbol BOUND (defines boundary limits for the graphic)
fe.	SDE	-	Support Data Extension
ff.	SDIF	-	SGML Document Interface Format
fg.	SDLVL	-	Symbol (Graphic) Display Level
fh.	SFH	-	Streaming File Header
fi.	SFH_DELIM1	-	SFH Delimiter 1
fj.	SFH_DELIM2	-	SFH Delimiter 2
fk.	SFH_L1	-	SGH Length 1
fl.	SFH_L2	-	SGH Length 2
fm.	SGML	-	Standardized Graphic Mark-up Language
fn.	SI	-	International System of Units (the modern metric system)
fo.	SID	-	Secondary Imagery Dissemination

fp.	SIDS	-	Secondary Imagery Dissemination System
fq.	SIT	-	Secondary Imagery Transmission
fr.	SL	-	Side Looking radar
fs.	SLOC	-	Symbol (Graphic) Location
ft.	SPIFF	-	Standard Profile for Image File Format
fu.	STA	-	Standard
fv.	STANAG	-	NATO Standardization Agreement
fw.	STYPE	-	Standard Type
fx.	SXSHD	-	Symbol (Graphic) Extended SubHeader Data
fy.	TAFIM	-	Technical Architecture Framework for Information Management
fz.	TFS	-	Transportable File Structure (ISO/IEC IS 12087-5)
ga.	TI	-	Thermal Infrared
gb.	TPXCD	-	Pad Output Pixel Code
gc.	TPXCDLNTH	-	Pad Output Pixel Code Length
gd.	TRE	-	Tagged Record Extension
ge.	TS	-	Text Segment
gf.	TXSHD	-	Text Extended SubHeader Data
gg.	TXTFMT	-	Text Format
gh.	U8S	-	UTF-8 Subset
gi.	UCS	-	Universal Multiple Octet Coded Character Set
gj.	UDHD	-	User-Defined Header Data
gk.	UDHDL	-	User-Defined Header Data Length
gl.	UDID	-	User-Defined Image Data
gm.	UN	-	United Nations
gn.	US	-	United States
go.	UT1	-	UCS Transformation Format 1 (1-Octet Coded UCS Characters)
gp.	UTC	-	Universal Time Code
gq.	UTF	-	UCS Transformation Format
gr.	UTM/UPS	-	Universal Transverse Mercator/Universal Polar Stereographic

gs.	VD	-	Video
gt.	VDC	-	Virtual Display Coordinates
gu.	VIS	-	Visible Imagery
gv.	VPH	-	Video Phase History
gw.	VQ	-	Vector Quantization
gx.	WIND	-	Air Wind Charts
gy.	WGS	-	World Geodetic System (NIMA TR8350.2)
gz.	XHD	-	Extended Header Data
ha.	XHDL	-	Extended Header Data Length
hb.	XRAY	-	Xrays
hc.	YCbCr601	-	Y for Brightness of signal, Cb for Chrominance (blue), Cr for Chrominance (red) (ITU-R RECMN BT.601-5)
hd.	ZULU	-	Zero Meridian

2. Terms and Definitions. The following terms and definitions are used for the purpose of this agreement. Where possible: concepts, acronyms, names, definitions etc. have been taken from the referenced documents. However for STANAG 4545, only the definitions described in this document shall apply. Words and statements that have a relevance specific to STANAG 4545 are either capitalised or begin with a capital letter.

- a. Associated Data. That related data required for completeness of the standard.
- b. Attachment Level. A way to associate images and graphics during movement, rotation, or display.
- c. Band. A well defined range of values (e.g., wavelengths, frequencies or energies of optical, electric, or acoustic radiation). At the pixel level, a band is represented as one of the vector values of the pixel. At image level band *i* of an image is the rectangular array of *i*th sample values from the pixel vectors.
- d. Bandwidth.
 - (1) The difference between the limiting frequencies within which performance of a device, in respect to some characteristic, falls within specified limits.
 - (2) The difference between the limiting frequencies of a continuous frequency band.
- e. Base Image. The base image is the principal image of interest or focus for which other data may be inset or overlaid. The NSIF File can have none, one, or multiple base images. For multiple base images in a single NSIF File, the relative location of each base image is defined in the Image Location (ILOC) Field in each Image Subheader. This location will be the offset within the Common Coordinate System (CCS) based on the Segment to which the image is attached.
- f. Basic Character Set (BCS). A subset of the Extended Character Set. The most significant bit of the BCS characters is set to 0. Valid BCS characters code shall range from 0x20 to 0x7E, plus Line Feed (0x0A), Form Feed (0x0C) and Carriage Return(0x0D).
- g. Basic Character Set-Alphanumeric (BCS-A). A subset of the Basic Character Set (BCS). The range of allowable characters consists of space to tilde, codes 0x20 to 0x7E.
- h. Basic Character Set-Numeric integer (BCS-N integer). A subset of the Basic Character Set-Numeric (BCS-N) comprising the digits '0' to '9' (codes 0x30 to 0x39), plus sign (code 0x2B) and minus sign (code 0x2D).
- i. Basic Character Set-Numeric Positive Integer (BCS-N positive integer). A subset of the Basic Character Set-Numeric (BCS-N) comprising the digits '0' to '9' (codes 0x30 to 0x39).
- j. BCS Space. BCS (and consequently ECS) code 0x20.
- k. Block. A block is a rectangular array of pixels.
- l. Blocked Image. A blocked image is composed of the union of one or more non-overlapping blocks.
- m. Blocked Image Mask. A structure which identifies the blocks in a blocked image which contains no valid data, and which are not included in the NSIF File. The structure allows the receiver to recognise the offset for each recorded/transmitted block. For example, a 2x2 blocked image which contains no valid data in the second block (block 1) would be recorded in the order: block 0, block 2, block 3. The Blocked Image Mask would identify block 1 as a non-existing block, and would allow the receiving application to construct the image in the correct order.
- n. Brightness. An attribute of visual perception, in accordance with which a source appears to emit more or less light. A pixel with a larger value is brighter than a pixel with a lower value.
- o. Byte. A sequence of eight adjacent binary digits.

- p. Character.
 - (1) A letter, digit, or other graphic that is used as part of the organisation, control, or representation of data.
 - (2) One of the units of an alphabet.
- q. Common Coordinate System (CCS). The virtual two dimensional Cartesian-like coordinate space which shall be common for determining the placement and orientation of displayable data.
- r. Conditional Field. A state applied to a NSIF File Header or NSIF Subheader Data Field whose existence and content is dependent on the existence and/or content of another field.
- s. Coordinated Universal Time. The time scale maintained by the International Earth Rotation Service (having previously been maintained by the Bureau International de l'Heure) that forms the basis of a coordinated dissemination of standard frequencies and time signals.
- t. Complexity Level (CLEVEL). A code used in the NSIF File Header that signals the degree of complexity an interpret implementation needs to support to adequately interpret the files. Items that differentiate complexity include: number of image segments, number of symbol segments, number of text segments, size of the common coordinate system, size of image data, etc.
- u. Data. Information in digital format.
- v. Data Communication. The transfer of information between functional units by using data transmission according to a protocol.
- w. Digraph. A two letter reference code.
- x. Display Level. The Graphic Display Level of the Segment relative to other displayed Segments in a composite display.
- y. Extended Character Set (ECS) Space. See BCS Space definition.
- z. Extended Character Set (ECS). A set of 1-byte encoded characters. Valid ECS character codes range from 0x20 to 0x7E, and 0xA0 to 0xFF, as well as Line Feed (0x0A), Form Feed (0x0C) and Carriage Return(0x0D). The ECS characters are described in Table C-3-1. As an interim measure, because of inconsistencies between standards, it is strongly advised that character codes ranging from 0xA0 to 0xFF should never be used. Therefore, the use of ECS characters should be restricted to its BCS Subset.
- aa. Extended Character Set – Alphanumeric (ECS-A). A subset of the Extended Character Set (ECS). Valid ECS-A character codes range from 0x20 to 0x7E, and 0xA0 to 0xFF. Line Feed (0x0A), Form Feed (0x0C) and Carriage Return (0x0D) are not valid ECS-A characters. As an interim measure, because of inconsistencies between standards, it is strongly advised that character codes ranging from 0xA0 to 0xFF should never be used. Therefore, the use of ECS-A characters should be restricted to its BCS-A Subset.
- ab. Field. Elementary set of relevant data.
- ac. Graphic. Graphic data is used in the NSIF to store two-dimensional information represented as a Computer Graphics Metafile (CGM). Each Graphic Segment (GS) consists of a Graphic Subheader and a Data Field containing the graphic data. A graphic may be black and white, grey scale, or colour. Examples of graphics are circles, ellipses, rectangles, arrows, lines, triangles, logos, unit designators, object designators (ships, aircraft), text, special characters, or a combination thereof. A graphic is stored as a distinct unit in the NSIF File allowing it to be manipulated and displayed non-destructively relative to the images and other graphics in the NSIF File. This standard does not preclude the use of n-dimensional graphics when future standards are developed. Note that the term "Graphic" as used in this document and "Symbol" as used in BIIF have the same meaning.
- ad. Grey Scale. An optical pattern consisting of discrete steps or shades of grey between black and white.

- ae. Image. A two-dimensional rectangular array of pixels indexed by row and column.
- af. Image Codes. For a vector quantized image, values in the image data section that are used to retrieve the $v \times h$ kernels from the image code book.
- ag. Imagery. Collectively, the representations of objects reproduced electronically or optically on film, electronic display devices, or other media.
- ah. Imagery Associated Data. Data which is needed to properly interpret and render pixels; data which is used to annotate imagery such as text, graphics, etc.; data which describes the imagery such as textual reports; and data which support the exploitation of imagery.
- ai. Interface.
(1) A concept involving the definition of the interconnection between two pieces of equipment or systems. The definition includes the type, quantity, and function of the interconnecting circuits and the type, form, and content of signals to be interchanged via those circuits. Mechanical details of plugs, sockets, and pin numbers, etc., may be included within the context of the definition.
(2) A shared boundary, e.g., the boundary between two subsystems or two devices.
(3) A boundary or point common to two or more similar or dissimilar command and control systems, subsystems, or other entities against which or at which necessary information flow takes place.
(4) A boundary or point common to two or more systems or other entities across which useful information flow takes place. (It is implied that useful information flow requires the definition of the interconnection of the systems which enables them to interoperate.)
(5) The process of interrelating two or more dissimilar circuits or systems.
(6) The point of interconnection between user terminal equipment and commercial communication-service facilities.
- aj. Kernel. For a vector quantized image, a rectangular group of pixels used in the organisation of quantizing image data.
- ak. Look-Up Table (LUT). A collection of values used for translating image samples from one value to another. The current sample value is used as an index into the Look-Up Table(s) (LUT); therefore, the number of entries in each LUT for a binary image would contain two entries, and each LUT for an 8-bit image would contain 256 entries. Multiple LUTs allow for the translation of a 1-vector pixel value to an n-vector pixel value.
- al. Magnification. The multiplication factor which causes an apparent change in linear distance between two points in an image. Thus a magnification of 2 is a change which doubles the apparent distance between two points (multiplying area by 4), while a magnification of 0.5 is a change which halves the apparent distance.
- am. Military Grid Referencing System (MGRS). A way of expressing Universal Transverse Mercator (UTM) coordinates as a character string, with the 100-kilometre components replaced by special letters (which depend on the UTM zone and ellipsoid). (Annex E of STANAG 2211 contains more details.)
- an. Multiplication. When used in this document the symbol * shall represent the product of the values of two or more fields of information.
- ao. Native File Format. The format that a specific system uses for internal storage and processing of images, graphics, text and associated data.
- ap. Network.
(1) An interconnection of three or more communicating entities and (usually) one or more nodes.
(2) A combination of passive or active electronic components that serves a given purpose.
- aq. NSIF Capable System. A system which is capable of both generating (Pack Capable) and receiving/processing (Unpack Capable) a NSIF File.

- ar. Open Systems Interconnect Model. This model is defined in ISO/IEC 7498-1.
- as. Ox. Hexadecimal notation.
- at. Pad Pixel. A pixel with sample values that have no significant relevance to the image. Pad Pixels are used with block images when either the number of pixel rows in an image is not an integer multiple of the desired number of vertical image blocks, or when the number of pixel columns in an image is not an integer multiple of the desired number of horizontal image blocks.
- au. Pad Pixel Mask. A data structure which identifies recorded/transmitted image blocks which contain Pad Pixels. The Pad Pixel Mask allows applications to identify image blocks which require special interpretation due to Pad Pixel content.
- av. Parity. In binary-coded systems, the oddness or evenness of the number of ones in a finite binary stream. It is often used as a simple error-detection check and will detect (but not correct) the occurrences of any single bit error in a field.
- aw. Pixel. A pixel is represented by an n-vector of sample values, where n corresponds to the number of bands comprising the image.
- ax. Primary Imagery. Unexploited, original imagery data that has been derived directly from a sensor. Elementary processing may have been applied at the sensor, and the data stream may include auxiliary data.
- ay. Processed Imagery. Imagery that has been formatted into Image Pixel format, enhanced to remove detected anomalies and converted to a format appropriate for subsequent disposition.
- az. Protocol.
 - (1) [In general], A set of semantic and syntactic rules that determines the behaviour of functional units in achieving communication. For example, a data link protocol is the specification of methods whereby data communication over a data link is performed in terms of the particular transmission mode, control procedures, and recovery procedures.
 - (2) In layered communication system architecture, a formal set of procedures that are adopted to facilitate functional interoperation within the layered hierarchy. Note: Protocols may govern portions of a network, types of service, or administrative procedures.
- ba. Pseudocolour. A user-defined mapping of n-bits into arbitrary colours.
- bb. Record(ed)(er). When used in this document, the words recorder or recorded do not refer to recording equipment or media.
- bc. Required Field. When applied to a NSIF File Header or Subheader Field, the term required indicates a mandatory field that must be present and filled with valid data.
- bd. Reconstruction. For a vector quantized image, the process of transforming an image from a quantized form into a displayable and exploitable form.
- be. Resolution.
 - (1) The minimum difference between two discrete values that can be distinguished by a measuring device.
 - (2) The degree of precision to which a quantity can be measured or determined.
 - (3) A measurement of the smallest detail that can be distinguished by a sensor system under specific conditions. Note: High resolution does not necessarily imply high accuracy.
- bf. Sample. The atomic element of an Image Pixel having a discrete value. One sample from the same location in each band comprising an image will combine to form a pixel.
- bg. Secondary Imagery. Secondary Imagery is digital imagery and/or digital imagery products derived from Primary Imagery or from the further processing of Secondary Imagery.

- bh. Secondary Imagery Dissemination (SID). The process of dispersing or distributing digital Secondary Imagery.
- bi. Secondary Imagery Dissemination System (SIDS). The equipment and procedures used in Secondary Imagery dissemination.
- bj. Segment. A Subheader and a Data Field.
- bk. Support Data Extension (SDE). Information, if provided, which adds additional capabilities to process the NSIF.
- bl. Tagged Record Extension (TRE). A set of fields to support user defined and extended data.
- bm. Text. Information conveyed as characters.
- bn. Tile. Synonymous with block.
- bo. Transparent Pixel. A pixel whose sample values must be interpreted for display such that the pixel does not obscure the display of any underlying pixel.
- bp. Universal Multiple Octet Coded Character Set (UCS). The Universal Multiple Octet Coded Character Set (UCS) is used for expressing text that must be human readable, potentially in any language of the world. It is defined in ISO/IEC 10646-1.
- bq. Universal Multiple Octet Coded Character Set (UCS) Transformation Format 8 (UTF-8). UTF-8 is a coded representation form for all of the characters of the UCS. In the UTF-8 coded representation form each character from this UCS has a coded representation that comprises a sequence of octets of length 1, 2, 3, 4, 5, or 6 octets.
- br. Universal Multiple Octet Coded Character Set (UCS) Transformation Format 8 (UTF-8) Subset (U8S). A Subset of the UCS composed of 1-byte and 2-byte UTF-8 encoded characters (Basic Latin and Latin Supplement 1). The 1-byte encoded characters of the UTF-8 Subset (U8S) are the BCS characters. The 2-byte encoded characters of U8S are described in Table C-3-2.
- bs. Universal Transverse Mercator (UTM). A system of grids for global use between latitudes 84 degrees North and 80 degrees South. The range of longitudes 180 degrees West to 180 degrees East is divided into 60 zones, each of which is a grid based on the Transverse Mercator projection. (Within each zone, there is a difference in coordinate systems either side of the Equator. On the northern side, northings start from zero at the Equator; on the southern side, northings are positive rising to 10 million at the Equator.) The actual grid depends on the choice of geodetic datum as well as the zone.
- bt. Universal Polar Stereographic (UPS). A pair of grids, one used north of 84° north and one used south of 80° south. Each grid is based on the polar stereographic projection. The actual grid depends on the choice of the geodetic datum.
- bu. Vector Quantization (VQ). A structuring mechanism in which many groups of pixels in an image are replaced by a smaller number of image codes. A clustering technique is used to develop a code book of best fit pixel groups, or kernels, to be represented by the codes. A form of compression is achieved because the image codes can be recorded using fewer bits than the original pixel groups they represent.
- bv. Vsize. For a vector quantized image, the size of the kernel in pixels.
- bw. V x H Kernel. For a vector quantized image, a rectangular group of pixels (kernels) with v-rows and h-columns.

This Page Intentionally Left Blank

TABLE OF CONTENTS - ANNEX B

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1	General	B-1
2	Relationship of NSIF to the NATO Open Systems Environment (NOSE)	B-1
3	NSIF Operations Concept	B-1
4	NSIF Design Objectives.....	B-3
5	NSIF General Requirements	B-3
6	NSIF Characteristics.....	B-3
7	NSIF File Structure.....	B-3
8	Common Coordinate System (CCS).....	B-3
8a	CCS Structure	B-3
8b	Row and Column Coordinates	B-4
8c	Complexity Level (CLEVEL) Constraints.....	B-4
 <u>Figure</u>		
B-1	NSIF Operational Concept.....	B-2
B-2	NSIF Functional Architecture	B-2
B-3	NSIF File Structure.....	B-3
B-4	Common Coordinate System (CCS) Example	B-4

THIS PAGE INTENTIONALLY LEFT BLANK

ANNEX B. NSIF OPERATIONAL CONCEPT

1. General. Among NATO nations multiple types of systems are used for the reception, transmission, storage, and processing of images, graphics, text, and other associated data. Without special efforts, the NSIF File Format used in one system is likely to be incompatible with the format of another system. Since each system may use a unique, internal data representation, a common format for exchange of information across systems is needed for interoperability of systems within and among NATO nations. As the need for imagery-related systems grows, their diversity is anticipated to increase. The need to exchange data is also anticipated to increase, even though systems of each nation must retain their own individual characteristics and capabilities. This document defines the NSIF, the Standard NSIF File Format for imagery and imagery-related products to be used by NATO. The NSIF provides a common basis for storage and interchange of images and associated data among existing and future systems. The NSIF can be used to support interoperability by simultaneously providing a data format for shared access applications, while also serving as a Standard NSIF File Format for dissemination of images graphics, text, and associated data.

2. Relationship of NSIF to the NATO Open Systems Environment (NOSE). The NATO Open Systems Environment (NOSE, Version 2, September 1995) provides technical guidance in the areas of design and procurement of C³I systems to take advantage of the benefits of open systems and the new technologies available in the commercial market. It should be clear that adherence to the NOSE guidance should result in cost savings over the life-cycle of systems, improve portability and scalability, provide interoperability, enhance efficiency during the development process, etc. In order to extend the NATO Open System Interconnection Profile (NOSIP) concept and the related ISO Open Systems Interconnection (OSI) Reference Model to the broader areas of application software portability and interoperability, the definition of a NATO Information Systems Reference model is required. To avoid confusion with the OSI Reference Model, it has been called the NATO Open Systems Environment (OSE) Reference model. The NATO OSE Reference Model is a set of concepts, entities, interfaces and diagrams that provides a basis for information system users to express their requirements to the provider community in a mutually agreeable context. It provides a basis for the specification of information technology standards necessary to develop, integrate, and maintain information systems and their infrastructure. This model has been generalised to such a degree that it can accommodate a wide variety of general and special purpose systems. The OSE Reference model is not a new development, but is based on the existing models from the Institute of Electrical and Electronic Engineers Portable Operating System (IEEE POSIX) and the United States (US) Department of Defense (DOD) Technical Architecture Framework for Information Management (TAFIM). The NATO OSE Reference Model supports the successful implementation of open systems within NATO. It should be noted that the NATO OSE Reference Model is evolutionary in nature. Standards will continue to emerge and evolve as the state-of-the-art is continually pushed forward. Future needs and contexts will have to be defined. Within this overall reference model, NATO Open Systems standard interfaces, protocols, services and supporting formats will have to be defined. This reference model is necessary to establish a context for understanding how the disparate technologies required as part of a future NATO OSE relate to each other, and to provide a mechanism for identifying the key issues associated with application software portability and interoperability. The NATO OSE Reference Model does not impose any architectural constraints. Its purpose is to provide a common conceptual framework, define a common vocabulary and specify a base of standards for NATO project and procurement staff. The NATO OSE Reference Model consists of the 3 basic components: the Application Software Entity, the Application Platform Entity, and the External Environment. The two interfaces between the 3 basic components consist of the Application Program Interface (API) and the External Environment Interface (EEI). The application platform is the set of resources that provide the services upon which an application or application software would call, and is meant to make the applications independent of the underlying hardware. It provides services at its interfaces that, as much as possible, make the implementation-specific characteristics of the platform transparent to the application software. Application platform resources are accessed via APIs. The Secondary Imagery Transmission/Secondary Imagery Dissemination (SIT/SID) functionality may be categorised within NOSE as a Data Interchange Service within the Application Platform Entity. For these types of services the following standards are recommended (March 1997): Standardized Graphic Mark-up Language (SGML), SGML Document Interface Format (SDIF), Computer Graphic Metafile (CGM), Joint Photographic Experts Group (JPEG), Motion Pictures Experts Group (MPEG), MPEG-1 and MPEG-2.

3. NSIF Operations Concept. The NSIF will be used for transmission and storage of Secondary Imagery within and among NATO C³I nodes. The NSIF has direct application to the dissemination of Secondary Imagery to requesters of imagery derived intelligence. Multimedia intelligence reports will be composed and packaged into a single NSIF File which answers the Essential Elements of Information (EELs) of a

particular requester. The intelligence reports may be composed of textual reports along with images, annotated images, graphics, and maps. Intelligence reports are generated after an interpreter exploits primary images or further exploits secondary images pulled out of an archive. Figure B-1 illustrates example formats used in the exploitation process of the reconnaissance cycle.

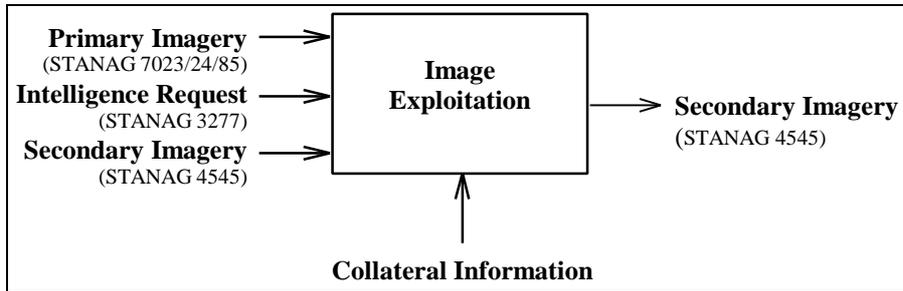


Figure B-1. NSIF Operational Concept

In the NSIF concept, imagery data interchange between systems is organised in NSIF Files and is enabled by a potential cross-translation process. When systems use other than NSIF as an internal imagery format, each system will have to translate between the system's internal representation for files, and the NSIF File Format. A system from which imagery data is to be transferred is envisioned to have a translation module that accepts information, structured according to the system's internal representation for images, graphics, text, and other associated data, and assembles this information into one file in the Standard NSIF File Format. Then the NSIF File will be exchanged with one or more recipients. Each of the receiving systems will translate the data from the NSIF File into its internal representation for images, graphics, text or other associated data. The functional architecture of this cross-translation process is shown on Figure B-2. In the diagram, the terms Native₁ File Format and Native₂ File Format refer to files represented in a way potentially unique to the sending or receiving system. Using the NSIF, each system must be compliant with only one external file format that will be used for interchange with all other participating systems. The Standard NSIF File Format allows a system to send data to several other systems since each receiving system converts the file into its own native file format. Each receiving system can translate selectively and permanently store only those portions of data in the received file that are of interest. This allows a system to transmit all of its data in one file, even though some of the receiving systems may be unable to process certain elements of the data usefully. NSIF can also serve as the internal native file format so any translation would be eliminated.

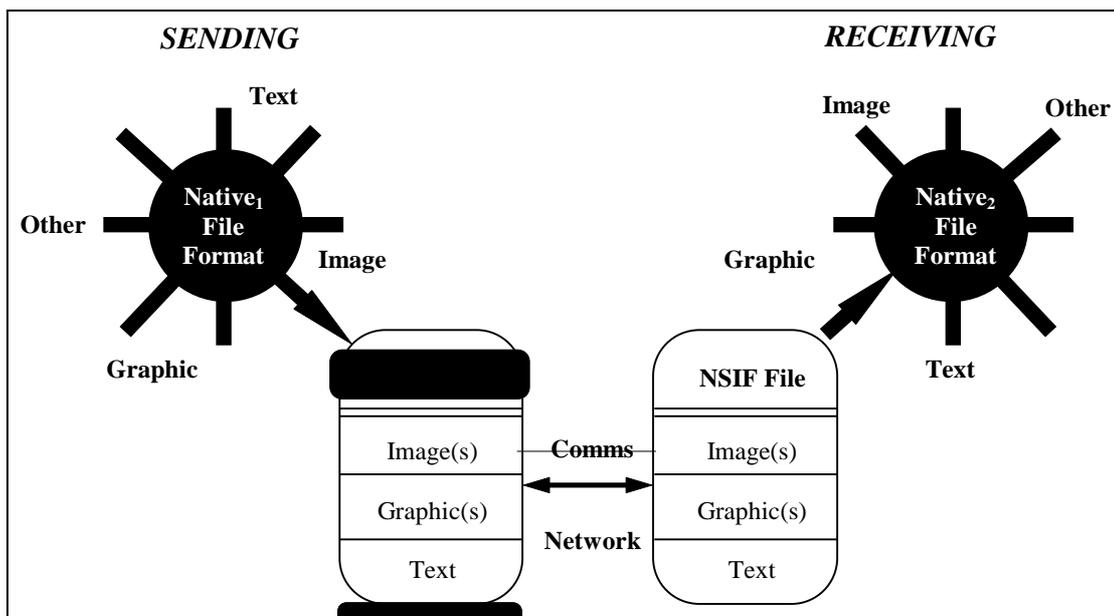


Figure B-2. NSIF Functional Architecture

4. NSIF Design Objectives. The design objectives of the NSIF are as follows:

- a. To provide a way for diverse systems to share imagery and associated data.
- b. To allow a system to send comprehensive information within one NSIF File to users with diverse needs or capabilities, allowing each user to select only those portions of data that correspond to their needs and capabilities.
- c. To minimise the cost and schedule required to achieve such capability.

5. **NSIF General Requirements.** The NSIF is specified to satisfy several general requirements in response to the role it plays in the NSIFS functional architecture. These requirements are:

- a. To be comprehensive in the kinds of data permitted in the NSIF File within the image-related objectives of the format, including geolocated imagery or image related products.
- b. To be implementable across a wide range of computer systems without reduction of available features.
- c. To provide extensibility to accommodate data types and functional requirements not foreseen.
- d. To provide useful capability with limited formatting overhead.

6. **NSIF Characteristics.** To serve a varied group of users exchanging multiple types of imagery and associated data who are using differing hardware and software systems, the NSIF strives to possess the following characteristics:

- a. Completeness - allows exchange of all needed imagery and associated data.
- b. Simplicity - requires minimal pre-processing and post-processing of transmitted data.
- c. Minimal overhead - minimised formatting overhead, particularly for those users transmitting only a small amount of data and for bandwidth-limited users.
- d. Universality - provides universal features and functions without requiring commonality of hardware or software.

7. **NSIF File Structure.** The NSIF File consists of the NSIF File Header and one or more Segment(s). A Segment consists of a Subheader and a Data Field, as shown in Figure B-3.

NSIF File						
NSIF File Header	Segment		...		Segment	
	Sub-Header	Data Field	Sub-Header	Data Field

Figure B-3. NSIF File Structure

8. **Common Coordinate System (CCS).** The Common Coordinate System (CCS) is the virtual two dimensional Cartesian-like coordinate space which shall be common for determining the placement and orientation of displayable data within a specific NSIF File and among correlated NSIF Files which comprise an integrated product.

a. **CCS Structure.** The virtual CCS structure can be conceived of as a two dimensional drawing space with a coordinate system similar in structure to the lower right quadrant of the Cartesian Coordinate System. The CCS has two perpendicular coordinate axes, the horizontal column axis and the vertical row axis as depicted in Figure B-4. The positive directions of the axes are based on the predominate scan (column) and line (row) directions used by the digital imagery community. The intersection of the axes is designated as the origin point with the coordinates (0,0). Given the orientation of the axes in Figure B-4, the positive direction for the column axis is from (0,0) to the right; the positive direction for the row axis is from (0,0)

downward. The quadrant represented by the positive column and positive row axes is the only coordinate space for which NSIF displayable data may be located.

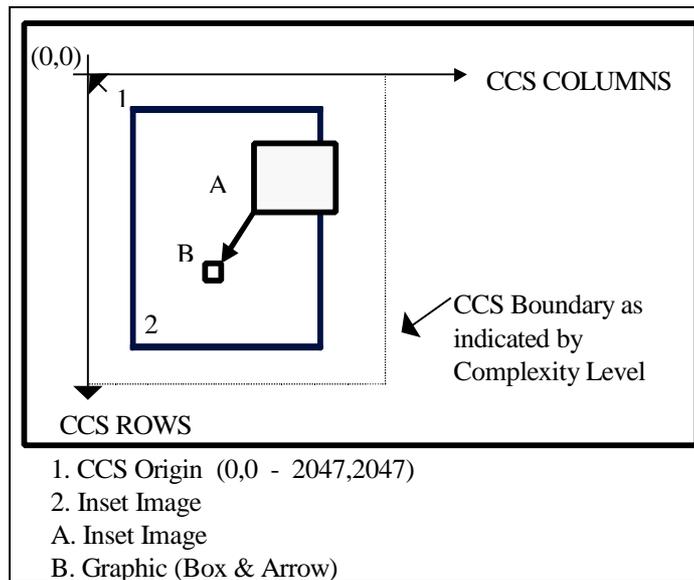


Figure B-4. Common Coordinate System (CCS) Example

b. Row and Column Coordinates. Displayable data shall be placed in the CCS according to the row and column coordinates placed in Subheader location fields (e.g., Image Location (ILOC) Field, Graphic Location (SLOC) Field). The location coordinates of a specific image or graphic (as shown in Figure B-4) represent row and column offsets from either the CCS origin point (when unattached), or the location point in the CCS to which the image or graphic is attached. Other means used to locate displayable data shall be directly correlated to row and column coordinates (e.g., displayable Tagged Record Extension (TRE) data might have Geolocation data correlated with row and column indices). When location coordinates are relative to the CCS origin, they shall always have a positive value. When location coordinates are relative to the location coordinates of an image or graphic to which they are attached, both positive and negative offset values are possible.

c. Complexity Level (CLEVEL) Constraints. The upper and left boundaries of the CCS are explicitly constrained in the specification. When CLEVEL constraints are specified, one of the key attributes for specification shall be to identify the lower and right boundary drawing space constraints for a given CLEVEL.

TABLE OF CONTENTS - ANNEX C

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
	FORMAT DESCRIPTION	C-1
1	Header, Segments, and Fields	C-1
2	Extension Segments, Conditional Fields.....	C-1
3	Supported Data Types.....	C-1
3a	Image Segments (IS)	C-1
3b	Graphic Segments (GS)	C-1
3c	Reserved Segments (RS).....	C-1
3d	Text Segments (TS).....	C-1
3e	Data Extension Segments (DES).....	C-1
3f	Reserved Extension Segments (RES).....	C-2
4	Application Guidance	C-2
5	Standard Data Segment Subheaders	C-2
6	Header/Subheader Field Specification.....	C-2
7	Field Structure and Default Values.....	C-2
8	Field Types.....	C-3
9	Logical Recording Formats.....	C-3
9a	Bit and Byte Order	C-3
9b	Row Column Relationship.....	C-3
	THE NSIF FILE HEADER.....	C-4
10	General	C-4
10a	Incomplete NSIF File Header	C-4
	NSIF PRODUCT AND OVERLAY CONCEPT	C-5
11	General	C-5
12	Image Overlay Relationships	C-5
13	Overlays and Display Level (DLVL).....	C-5
14	Display Level (DLVL) Interpretation.....	C-5
15	Attachment Level (ALVL).....	C-5
	IMAGE DATA	C-7
16	General	C-7
16a	Image Representation (IREP).....	C-7
16b	Image Category (ICAT).....	C-8
17	Image Model	C-8
17a	Display of NSIF Images.....	C-8
17b	Blocked Images.....	C-9
17c	Blocked Image Masking	C-10
17d	Pad Pixel Masking.....	C-10
18	NSIF Image Information.....	C-11
18a	Image Subheader	C-11
18b	Image Data Mask	C-12
18c	Image Data Format	C-12
18c(1)	Uncompressed Image Data Format	C-12
18c(1)(a)	Single Band Image Uncompressed Data Format.....	C-12
18c(1)(b)	Multiple Band Image Uncompressed Data Format.....	C-12
18c(1)(b){1}	Band Sequential	C-12
18c(1)(b){2}	Band Interleaved by Pixel.....	C-12
18c(1)(b){3}	Band Interleaved by Block.....	C-13
18c(1)(b){4}	Band Interleaved by Row.....	C-13
18c(2)	Compressed Image Data Format	C-13
18d	Grey Scale Look-Up Tables (LUT)	C-13
18e	Colour Look-Up Tables (LUT)	C-13
	GRAPHIC DATA	C-13
19	General	C-13
20	Graphic Subheader	C-13
21	Graphic Data Format	C-13
22	CGM Graphic Bounding Box.....	C-14
	FUTURE DATA (RESERVED SEGMENTS (RS))	C-14
23	Reserved Segments (RS).....	C-14

	TEXT DATA	C-14
24	General	C-14
25	Representation of Textual Information	C-14
25a	Standard (STA)	C-14
25b	Message Text Format (MTF)	C-14
25c	ECS Text Formatting (UT1)	C-14
25d	U8S Text Formatting (U8S).....	C-14
26	Text Subheader	C-14
27	Data Extensions.....	C-14
27a	Tagged Record Extension (TRE)	C-14
27a(1)	Controlled Extension (CE).....	C-15
27a(2)	Registered Extension (RE).....	C-15
27a(3)	TRE Placement	C-15
27a(4)	TRE Registry.....	C-15
27b	Data Extension Segment (DES)	C-15
27b(1)	DES Use.....	C-16
27b(2)	DES Structure	C-16
27c	Defined DES	C-16
27c(1)	Tagged Record Extension Overflow (TRE_OVERFLOW) DES	C-16
27c(2)	Streaming File Header (STREAMING_FILE_HEADER) DES	C-16
27d	Reserved Extension Segment (RES).....	C-17
27d(1)	RES Use.....	C-17
27d(2)	RES Structure.....	C-17

Figures

C-1	NSIF File Structure.....	C-1
C-2	Row Column Relationship	C-4
C-3	NSIF File Header Structure.....	C-4
C-4	NSIF Display Level (DLVL) Illustration.....	C-6
C-5	Attachment Level (ALVL) Relationships	C-7
C-6	Image Coordinate Representation	C-9
C-7(a)	A Blocked Image.....	C-10
C-7(b)	A Blocked, Padded Image.....	C-10
C-7(c)	A Blocked, Padded Image with Empty Blocks.....	C-11
C-8	Tagged Record Extensions (TRE).....	C-15
C-2-1	Sample NSIF File Composite Image	C-2-1
C-3-1	A Typical World Geodetic System 84 (WGS 84) Universal Transverse Mercator (UTM) Zone (Compressed).....	C-3-16
C-5-1	Single NSIF File, Single Base Image	C-5-2
C-5-2	Single NSIF File, Multiple Images	C-5-4

Tables

C-1-1	NSIF File Header	C-1-1
C-1-2	Display Dependent Parameters	C-1-10
C-1-2(A)	Category Dependent Parameters	C-1-11
C-1-3	NSIF Image Subheader.....	C-1-13
C-1-3(A)	NSIF Image Data Mask Table.....	C-1-29
C-1-4	Valid NATO Security Control Markings.....	C-1-31
C-1-4(A)	Valid File/Segment Security Control Markings	C-1-32
C-1-5	NSIF Graphic Subheader	C-1-33
C-1-6	NSIF Text Subheader	C-1-39
C-1-7	Controlled and Registered Tagged Record Extension (TRE) Format.....	C-1-44
C-1-8	NSIF Data Extension Segment (DES) Subheader	C-1-45
C-1-8(A)	Tagged Record Extension Overflow (TRE_OVERFLOW) Data Extension Segment (DES) Subheader	C-1-49
C-1-8(B)	Streaming File Header (STREAMING_FILE_HEADER) Data Extension Segment (DES) Subheader	C-1-53
C-1-9	NSIF Reserved Extension Segment (RES) Subheader	C-1-57
C-2-1	Example NSIF File Header	C-2-2
C-2-2	Example of the First Image Subheader	C-2-5

C-2-3	Example of the Second Image Subheader	C-2-8
C-2-4	Graphic Subheader for the First Graphic	C-2-10
C-2-5	Graphic Subheader for the Second Graphic	C-2-12
C-2-6	Graphic Subheader for the Third Graphic	C-2-14
C-2-7	Graphic Subheader for the Fourth Graphic	C-2-16
C-2-8	Graphic Subheader for the Fifth Graphic	C-2-18
C-2-9	Text Subheader for the Text Segment (TS).....	C-2-20
C-3-1	NSIF 1 Byte Coded Character.....	C-3-4
C-3-2	NSIF 2 Byte Coded Character.....	C-3-13
C-4-1	Sample NSIF File Structure	C-4-1
<u>Appendix 1</u>	NSIF TABLES	C-1-1
<u>Appendix 2</u>	EXAMPLE NSIF FILE	C-2-1
1	Use of NSIF	C-2-1
2	Example NSIF File.....	C-2-1
2a	Explanation of the NSIF File Header.....	C-2-4
2b	Explanation of the Image Subheaders.....	C-2-5
2b(1)	Explanation of the First Image Subheader	C-2-7
2b(2)	Explanation of the Second Image Subheader.....	C-2-9
2c	Explanation of the Graphic Subheaders.....	C-2-10
2c(1)	Explanation of the First Graphic Subheader	C-2-11
2c(2)	Explanation of the Second Graphic Subheader	C-2-13
2c(3)	Explanation of the Third Graphic Subheader	C-2-15
2c(4)	Explanation of the Fourth Graphic Subheader	C-2-17
2c(5)	Explanation of the Fifth Graphic Subheader.....	C-2-19
2d	Explanation of the Text Subheaders	C-2-20
2d(1)	Explanation of the First Text Subheader.....	C-2-20
<u>Appendix 3</u>	IMPLEMENTATION CONSIDERATIONS.....	C-3-1
	GENERAL.....	C-3-1
1	NSIF Implementation Guidelines.....	C-3-1
	GENERAL REQUIREMENTS.....	C-3-1
2	Scope of NSIF Implementation.....	C-3-1
3	Creating NSIF Headers and NSIF Subheaders.....	C-3-1
4	Character Counts	C-3-1
5	Data Entry	C-3-1
6	User-Defined NSIF File Header and User-Defined Image Subheader Data Fields	C-3-1
6a	Handling the Extended Headers and Subheaders	C-3-1
7	Out-of-Bounds Field Values	C-3-2
8	Use of Images in NSIF	C-3-2
9	Use of Text in NSIF	C-3-2
10	Formatted Documents.....	C-3-2
11	Converting Colour to Grey Scale	C-3-2
11a	Eight-bit Grey Scale Presentation.....	C-3-2
11b	One-bit Grey Scale Presentation	C-3-2
11c	Greater than Eight-bit Grey Scale Presentation.....	C-3-2
11d	Washout.....	C-3-3
12	File System Constraints	C-3-15
13	Security Considerations	C-3-15
14	NSIF Printer Incompatibilities	C-3-15
15	Universal Transverse Mercator (UTM) Coordinate Hemisphere Resolution	C-3-15
15a	North (N)/South (S) Method	C-3-15
<u>Appendix 4</u>	SAMPLE NSIF FILE STRUCTURE	C-4-1

<u>Appendix 5</u>	PRODUCT CONFIGURATIONS.....	C-5-1
	INTRODUCTION.....	C-5-1
1	General.....	C-5-1
2	Purpose.....	C-5-1
	NSIF PRODUCT CONFIGURATIONS.....	C-5-1
3	General.....	C-5-1
3a	Single NSIF File, Single Base Image.....	C-5-1
3b	Single NSIF File, Multiple Images.....	C-5-1
3c	Single NSIF File, No Image.....	C-5-1
3d	Multiple Correlated NSIF Files.....	C-5-1
4	Single NSIF File, Single Base Image.....	C-5-1
4a	Image Segment (IS) Overlays.....	C-5-2
4b	Graphic Segment (GS) Overlays.....	C-5-2
4c	Non-Destructive Overlays.....	C-5-2
4d	Text Segments (TS).....	C-5-2
4e	Extension Data.....	C-5-3
5	Single NSIF File, Multiple Images.....	C-5-3
5a	Overlays.....	C-5-4
5b	Text Segments (TS).....	C-5-5
5c	Extension Data.....	C-5-5
6	Single NSIF File, No Image.....	C-5-5
7	Multiple Correlated NSIF Files.....	C-5-5
7a	Stereo Imagery.....	C-5-5
7b	Imagery Mosaics.....	C-5-5
7c	Reduced Resolution Data Set (Rset).....	C-5-5
7d	Imagery and Maps.....	C-5-5

ANNEX C. NSIF FILE FORMAT

- Appendix 1. NSIF Tables
- Appendix 2. Example NSIF File
- Appendix 3. Implementation Considerations
- Appendix 4. Sample NSIF File Structure
- Appendix 5. Product Configurations

FORMAT DESCRIPTION

1. Header, Segments, and Fields. A NSIF File contains a NSIF File Header and Segments. A Segment contains a Subheader and a Data Field. All NSIF Fields are byte aligned. The NSIF File Header carries information about the identification, classification, structure, content, size of the NSIF File as a whole, and the number and size of the major component Segments within the NSIF File. For each type of Data Segment (as shown in Figure C-1) supported by the format, there is an associated Subheader and Data Field. A Subheader contains information that describes characteristics of the Data Field that contains the actual data.

2. Extension Segments, Conditional Fields. Flexibility to add support for the types of data and data characteristics not explicitly defined in this standard is provided within the format. This is accomplished by providing for conditional fields in NSIF File Header and in each Subheader indicating the presence of TRE and providing for a group of Data Extension Segments (DES). The TRE in the Headers/Subheaders may contain additional characteristics about the corresponding data, while the DES are intended primarily to provide a vehicle for adding support for new types of data. The Tags for the TRE will be co-ordinated centrally to avoid conflicting use.

3. Supported Data Types. A single NSIF File may comprise different types of Segments. A Segment containing information of a standard data type is called a Standard Data Segment. The organisation of the different types of Segments is described below and in Figure C-1.

- a. Image Segments (IS). An Image Segment (IS) supports the standard image type of data.
- b. Graphic Segments (GS). A Graphic Segment (GS) supports the standard graphic type of data.
- c. Reserved Segments (RS). The Reserved Segments (RS) are place holders to support a future standard type of data, that has yet to be defined.
- d. Text Segments (TS). A Text Segment (TS) supports the standard text type of data.
- e. Data Extension Segments (DES). A DES allows for the addition of different data types with each type encapsulated in its own DES. (paragraphs 27b and 27c).

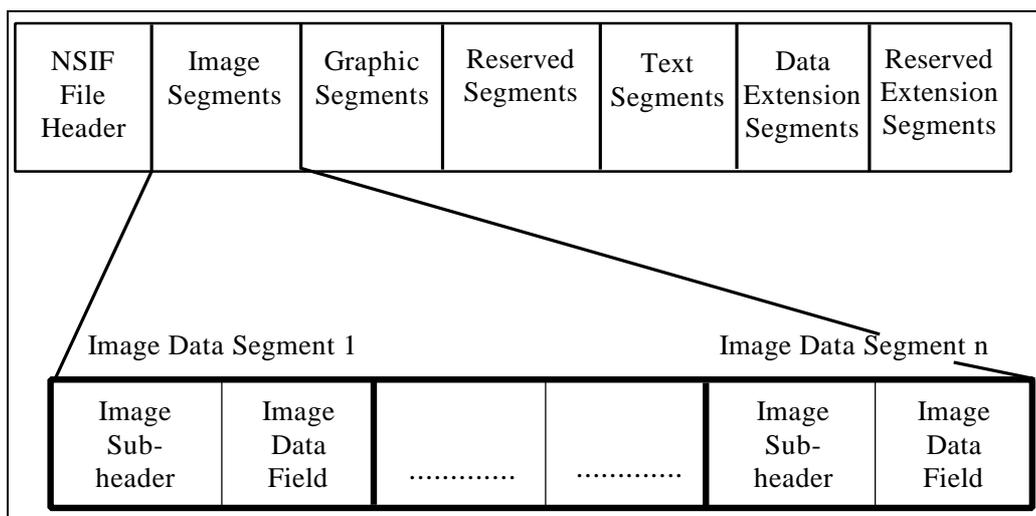


Figure C-1. NSIF File Structure

- f. Reserved Extension Segments (RES). A Reserved Extension Segment (RES) is a non-Standard Data Segment which is user-defined. An NSIF File can support different user-defined types of Segments called RES (paragraph 27d).

4. Application Guidance. The NSIF File supports inclusion of Standard Data Segments of information in a single file: image, graphic, and text. It is possible to include zero, one, or multiples of each Standard Data Segment in a single file (for example: several images, but no graphics). Standard Data Segments shall be placed in the file in the following order: all IS, followed by all GS, followed by all TS.

5. Standard Data Segment Subheaders. Each individual Standard Data Segment included in a NSIF File, such as an IS, a TS, or a GS, consists of a Subheader and a Data Field. The first part of the Segment contains the Subheader, the second the corresponding Data Field. This Subheader concerns that particular Data Field and data type only. If no Data Fields of a given type are included in the NSIF File, a Subheader for that data type shall not be included in the NSIF File. All Data Fields and associated Subheaders of a single type shall precede the first Subheader for the next data type. The ordering of multiple Data Fields of one type is arbitrary. A diagram of the overall NSIF File structure is shown on Figure C-1.

6. Header/Subheader Field Specification. The specification of the fields in the various Headers/Subheaders found within a NSIF File is provided in a series of tables in Appendix 1. Each table includes a mnemonic identifier (ID) for each field within a Header/Subheader, the FIELD's name, a description of the valid contents of the field, and any constraints on the field's use, the field SIZE in bytes, the VALUE RANGE it may contain, and an indication of its TYPE (paragraph 8). The NSIF File Header Fields are specified in Table C-1-1. The Standard Data Segment Subheader Fields are specified in Tables C-1-3, C-1-5, and C-1-6. The TRE Subheaders (paragraph 27a) and RES (paragraph 27d) are defined in Tables C-1-7 and C-1-9. Finally, the DES Subheader Fields (paragraphs 27b and 27c) are defined in Tables C-1-8, C-1-8(A), and C-1-8(B).

7. Field Structure and Default Values. The NSIF uses byte counts to delimit Header Fields, as opposed to special end-of-field characters or codes or direct addressing. These counts are provided in the tables detailing the NSIF Header and NSIF Subheader Field specifications.

a. Character Set. To provide simple communication among NSIF stations, data within NSIF are mostly represented using characters. Numbers represented by characters eliminate problems caused by word length and machine internal representation differences. Humans can easily read NSIF Header and Subheader Fields populated with characters. The character sets used in NSIF are:

- (1) Universal Multiple Octet Coded Character Set (UCS) Transformation Format 8 (UTF-8) Subset (U8S). The NSIF U8S is a subset of the UCS character set limited to 1-byte and 2-byte UTF-8 encoded characters (Basic Latin and Latin Supplement 1). The 1-byte encoded characters of the UTF-8 Subset (U8S) are the BCS characters. Their most significant bit is necessarily set to 0. The 2-byte encoded characters of U8S are described in Table C-3-2. The most significant bit of their first byte is set to 1, indicating that a second byte follows.
- (2) Extended Character Set (ECS). The NSIF ECS is a set of 1-byte encoded characters. Valid ECS character codes range from 0x20 to 0x7E, and 0xA0 to 0xFF, as well as Line Feed (0x0A), Form Feed (0x0C), and Carriage Return (0x0D). The ECS characters are described in Table C-3-1. As an interim measure, because of inconsistencies between standards, it is strongly advised that character codes ranging from 0xA0 to 0xFF should never be used. Therefore, the use of ECS characters should be restricted to its BCS Subset.
- (3) Extended Character Set – Alphanumeric (ECS-A). The NSIF ECS-A is a subset of the ECS. Valid ECS-A character codes range from 0x20 to 0x7E, and 0xA0 to 0xFF. Line Feed (0x0A), Form Feed (0x0C), and Carriage Return (0x0D) are not valid ECS-A characters. As an interim measure, because of inconsistencies between standards, it is strongly advised that character codes ranging from 0xA0 to 0xFF should never be used. Therefore, the use of ECS-A characters should be restricted to its BCS-A Subset.
- (4) Basic Character Set (BCS). The NSIF BCS is a subset of the ECS. The most significant bit of the BCS characters is set to 0. Valid BCS characters code shall range from 0x20 to 0x7E, plus Line Feed (0x0A), Form Feed (0x0C), and Carriage Return(0x0D).
- (5) Basic Character Set – Alphanumeric (BCS-A). The NSIF BCS-A is a subset of the BCS. Valid BCS-A character codes range from 0x20 to 0x7E.
- (6) Basic Character Set-Numeric (BCS-N). The NSIF BCS-N is a subset of the BCS that

consists of the digits '0' to '9' (codes 0x30 to 0x39), plus sign (code 0x2B), minus sign (code 0x2D), decimal point (code 0x2E) and slash (0x2F).

- (7) Basic Character Set-Numeric Integer (BCS-N integer). A subset of the BCS-N that consists of the digits '0' to '9' (codes 0x30 to 0x39), plus sign (code 0x2B) and minus sign (code 0x2D).
- (8) Basic Character Set-Numeric Positive Integer (BCS-N positive integer). A subset of the BCS-N that consists of the digits '0' to '9' (codes 0x30 to 0x39).

b. Use of NSIF Character Sets. All data in ECS-A or BCS-A populated NSIF Header and Subheader Fields shall be left justified and padded to the right boundary with BCS Spaces (code 0x20). BCS-N positive integer fields and BCS-N integer Fields may contain one or more integer values. Each of these NSIF encoded values has a fixed length and position within the field. Each NSIF encoded integer value is right justified and padded to the left boundary with leading BCS Zeros (code 0x30)). However, where a BCS-N field allows a plus sign (code 0x2B) or minus sign (code 0x2D), it is the left most character of the integer value.

c. Standard Default value. The standard default value shall be BCS Spaces (code 0x20) for alphanumeric fields and BCS Zero (code 0x30) for numeric fields. For a few fields, a specific default may be indicated in the field description. In this case, the field description shall take precedence. All NSIF Header and Subheader Fields contained in a NSIF file shall contain either valid data (that is, data in accordance with the restrictions specified for the contents of the field in this document) or the specified default value.

8. Field Types. The NSIF File Header and various Subheaders have two types of fields: required and conditional. A required field shall be present and shall contain valid data or the specified default value. A conditional field may or may not be present depending on the value of one or more preceding (required) fields. If a conditional field is present, it shall contain valid data. When a field is conditional, its description identifies what conditions and which preceding field or fields are used to determine whether or not to include it in the NSIF File. For example, in the NSIF File Header, if the Number of Images (NUMI) Field contains the value of 2, the Length of 1st Image Subheader (LISH1), Length of 1st Image Segment (LI1), Length of 2nd Image Subheader (LISH2), and Length of 2nd Image Segment (LI2) Fields will be present and must be filled with valid data. However, if the NUMI field contains BCS Zeros (code 0x30), the Length of nth Image Subheader (LISHn) and Length of nth Image Segments (LI_n) Fields are omitted.

9. Logical Recording Formats.

a. Bit and Byte Order.

- (1) The method of recording numeric data on interchange media shall adhere to the big endian convention. In big endian format, the most significant byte in each numeric field shall be recorded and read first, and successive byte recorded and read in order of decreasing significance. That is, if an n-byte field named F is stored in memory beginning at address A, then the most significant byte of the F field shall be stored at A, the next at A+1, and so on. The least significant byte shall be stored at address A+n-1.
- (2) BCS character strings shall be recorded in the order in which the data is generated.
- (3) The MSB in each byte of every field, regardless of data type, shall be recorded and read first, and successive bits shall be recorded and read in order of decreasing significance.
- (4) Pixel arrays shall be recorded in the order specified in the Image Mode (IMODE) Field and as discussed in paragraph 18c. Pixel arrays shall be recorded from left to right starting at the top, and non-interlaced raster scanning downward. The top left pixel shall be recorded first, and the bottom right pixel shall be recorded last.

b. Row Column Relationship. NSIF imagery is displayed by mapping each Image Pixel to a specific row r and column c within the bottom right quadrant shown on Figure C-2. Rows are represented on the vertical (y-axis) and columns are represented on the horizontal (x-axis). Moving from location (0,0) down and to the right is considered moving in a positive direction. The first pixel of an image would be placed at (r0,c0), followed by pixels (r0,c1); (r0,c2) and so on until the end of the row. The first pixel of the second row of Image Pixels would be located at (r1,c0).

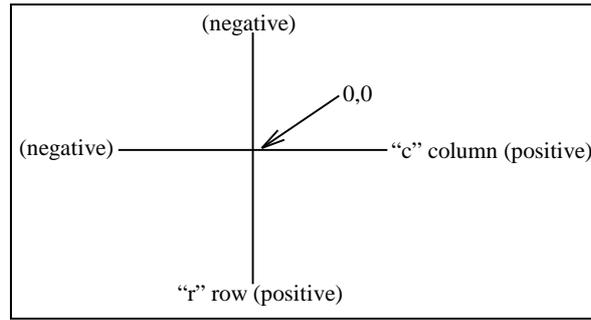


Figure C-2. Row Column Relationship

THE NSIF FILE HEADER

10. General. Each NSIF File shall begin with a Header, the NSIF File Header, whose fields contain identification and origination information, file-level security information, and the number and size of Segments of each type, e.g. IS(s), GS(s), and TS(s), contained in the NSIF File. Figure C-3 depicts the NSIF File Header. It depicts the types of information contained in the Header and shows the Header’s organisation as a sequence of groups of related fields. The expansion of the Image Group illustrates how the Header’s overall length and content may expand or contract depending on the number of Segments of each type included in the NSIF File. The NSIF Header is detailed in Table C-1-1.

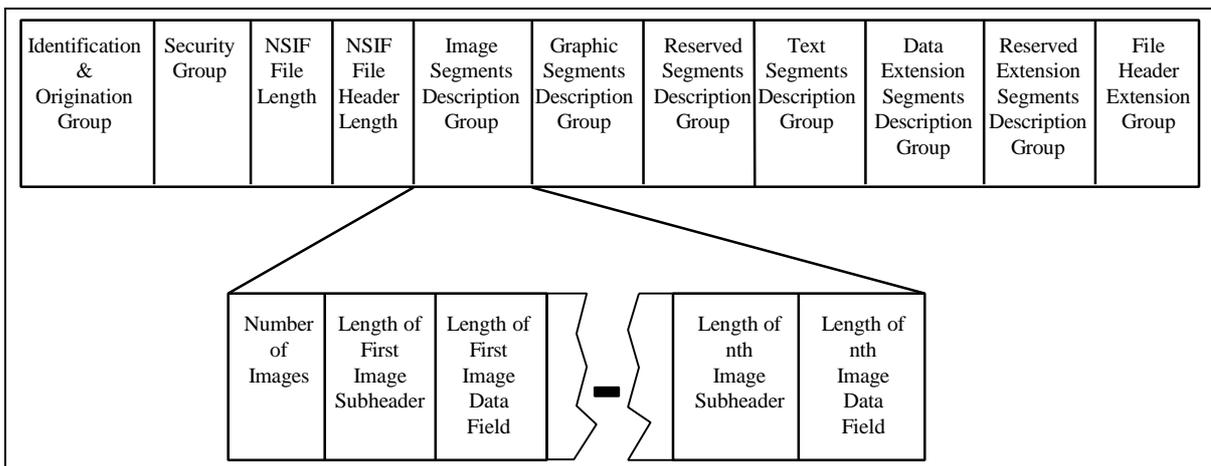


Figure C-3. NSIF File Header Structure

a. Incomplete NSIF File Header. The Streaming File Header (STREAMING_FILE HEADER) DES is intended for use only when time critical or storage constrained operations need to begin to create or transfer a NSIF File before all the NSIF File Header fields can be populated. To enable a receiving system to recognise an intentionally incomplete NSIF File Header, where data for length fields (NSIF File Header Length (HL) to Length of ⁿth Data Extension Segment (LD_n) Fields) are not yet available, these fields are completely populated with the numeric character 9 (0x39). A capable system receiving a NSIF File, where the NSIF File Header is identified as intentionally incomplete, shall locate the STREAMING_FILE HEADER DES and interpret the values as though they were located at the beginning of the NSIF File. Where possible, systems capable of unpacking the STREAMING_FILE_HEADER DES should store the NSIF File with a complete NSIF File Header replacing the first SFH_D1 characters of the NSIF File with their corresponding values from the SFH-DR field of the STREAMING_FILE_HEADER DES. This facilitates modification of the NSIF File and enables successful re-transmission of the NSIF File to systems that are not STREAMING_FILE_HEADER DES capable. The STREAMING_FILE_HEADER DES will be removed if the NSIF File is repacked.

NSIF PRODUCT AND OVERLAY CONCEPT

11. General. The following subsections describe the non-destructive nature of NSIF and the relationships anticipated to exist among the Segments in a NSIF File and how these relationships are represented in the NSIF File. An image product may conceivably consist of the following:

- a. A correlated set of multiple NSIF Files.
- b. A single NSIF File with multiple images, each with their own overlays and associated data.
- c. A NSIF File with no image.
- d. A single NSIF File with a single image and its overlays and associated data.

To facilitate description of the NSIF overlay concept, only the latter case will be addressed in the context of this subsection. (Appendix 5 to Annex C defines how to apply the overlay concept to the other two cases.)

12. Image Overlay Relationships. Each single NSIF File is composed of one or more NSIF Standard Data Segments plus associated data. The association and portrayal of displayable Segments is accomplished through the use of location indices, Display Levels (DLVL) and Attachment Levels (ALVL). The placement of displayable Data Segments in the CCS (Annex B, paragraph 8) is recorded in the location field of the Segment's Subheader. The relative visibility, when displayed, of the various displayable Segments in the NSIF File is recorded in the NSIF File by use of the DLVL fields (in the standard information type Subheaders, specifically IDLVL for images and SDLVL for graphics). Groupings of related Segments may be formed by use of the ALVL fields (in the standard information type Subheaders, specifically IALVL for images and SALVL for graphics). For example, when a base IS is present, it may form the basis for using the other data contained in the product. Images other than the base image may be associated with the base image via the use of the ILOC, IDLVL and IALVL fields of their Image Subheaders. All images and graphics associated with the base image define overlays to the base image in the sense that, when displayed, they will overwrite the underlying portion (if any) of the base image. Images and graphics associated with (attached to) the base image may be positioned such that they are completely on the base image, are partially on the base image, or completely off (adjacent to) the base image.

13. Overlays and Display Level (DLVL). The order in which images and graphics are stacked visually when displayed is determined by the IDLVL field for images and the SDLVL field for graphics in the standard information type Subheaders, not by their relative position within the NSIF File. The IDLVL and SDLVL fields contain a positive integer from 001 to 999. Every IS and GS in a NSIF File shall have a unique IDLVL or SDLVL. That is, no two Segments may have the same value in their IDLVL or SDLVL fields. This requirement allows display appearance to be independent of data processing or NSIF File sequence order.

14. Display Level (DLVL) Interpretation. The DLVL determines the display precedence of images and graphics within an NSIF File when they are output to a display device. That is, at any pixel location shared by more than one image or graphic, the value displayed there is that determined from the Segment with the highest numbered DLVL. Figure C-4 illustrates a sample output presentation from a NSIF File that illustrates the effects of DLVL assignment. The DLVL of each Segment is indicated in the list of images and graphics in Figure C-4. In the case shown, the Segment with DLVL one is not an image but rather an opaque CGM rectangle (graphic data, not image data). Because the CGM rectangle is larger than the image (which, in this case, serves as the first overlay because its DLVL is two), it provides a border to the base image. Following increasing DLVL value, the border is overlaid by Text: Graphic 1 which is, in turn, overlaid by Arrow 1, etc. The ALVL values in Figure C-4 refer to Attachment Levels.

15. Attachment Level (ALVL). The ALVL provides a way to associate display Segments (images and graphics) with one another so they may be treated together for certain operations such as moving them, rotating them, or displaying them as a group. The ALVL of a displayable Segment shall be equal to the DLVL of the Segment to which it is attached. This value is stored in the ALVL field (specifically IALVL for images, SALVL for graphics) of the Segment's Subheader. A Segment with DLVL one (DLVL001) (the minimum DLVL in this example), must have an ALVL of zero (ALVL000). An ALVL000 shall be interpreted as unattached. The Segment having minimum DLVL shall have ALVL000 and a CCS location

(0,0). Any other Segment may also have ALVL000, that is, be unattached. An overlay's DLVL shall always be numerically

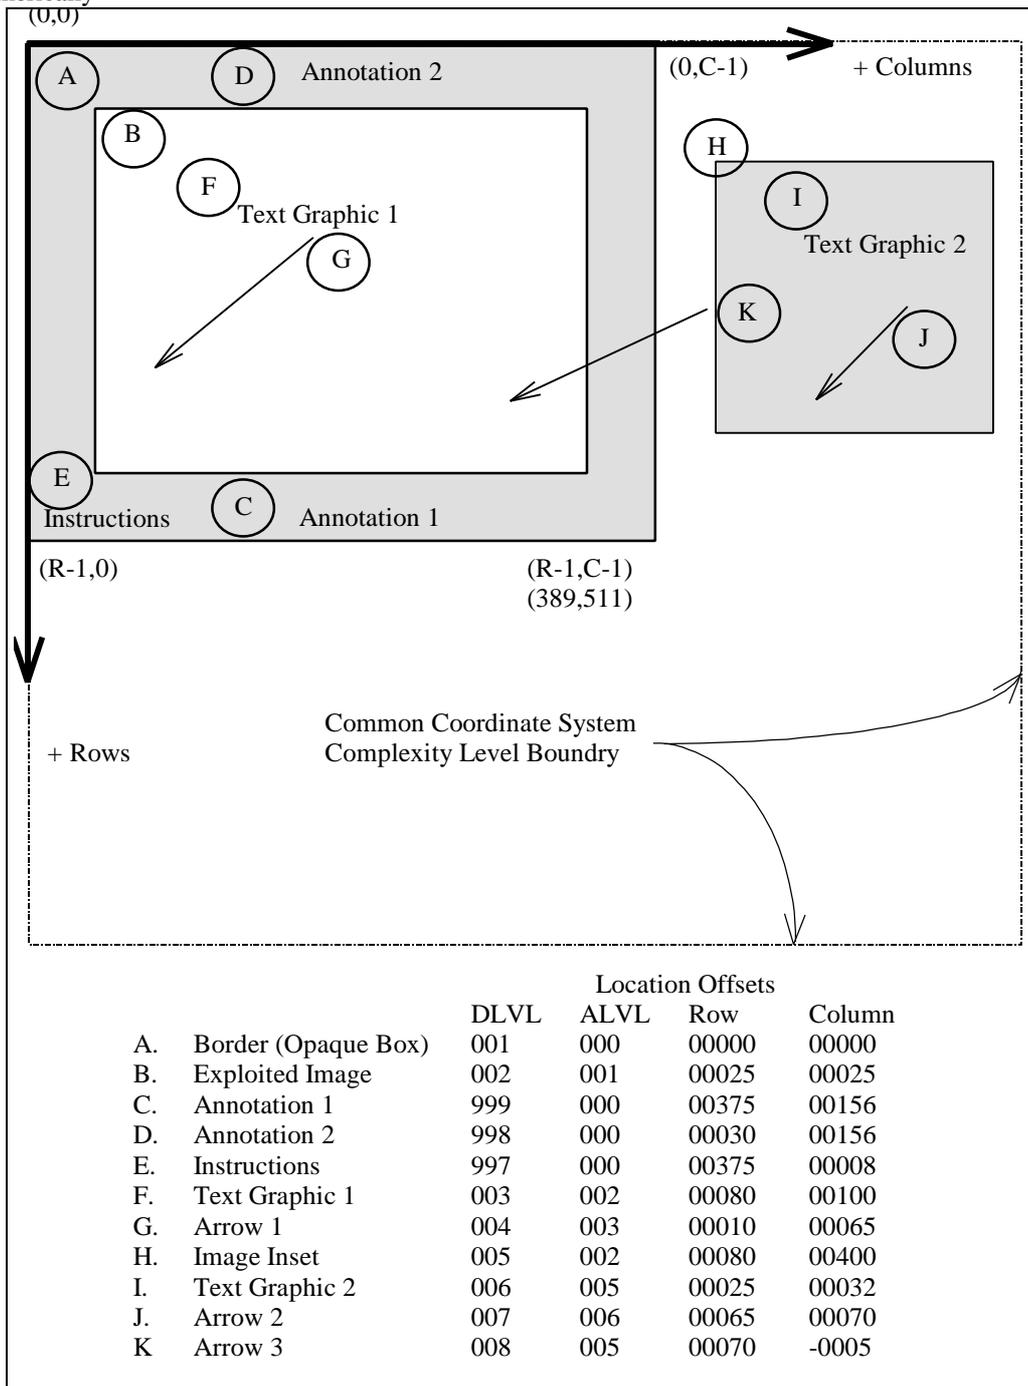


Figure C-4. NSIF Display Level (DLVL) Illustration

greater than its ALVL (that is, an overlay must be attached to something previously displayed or it is unattached). Figure C-5 shows the attachment relationships of the overlays on Figure C-4. When an overlay or base is edited (moved, deleted, rotated), all overlays attached to it, directly or indirectly, may be affected by the same operation. For example, on Figure C-5, if the exploited image (DLVL002, ALVL001) were moved one centimetre to the left, the arrows (DLVL004, ALVL003, and DLVL007, ALVL006), the image inset (DLVL005, ALVL002), and the graphic (DLVL006, ALVL005) associated with the image inset also would be moved one centimetre to the left. Recognising that because of the way the ALVL has been constructed, if the graphic annotation (DLVL003, ALVL002) were deleted, so would be its associated Arrow 1 (DLVL004, ALVL003). Although the ALVL provides the means to group or associate displayed images and graphics,

the provision of user operations (e.g. moving, rotating, etc.) to act on or use ALVL information is an implementers choice.

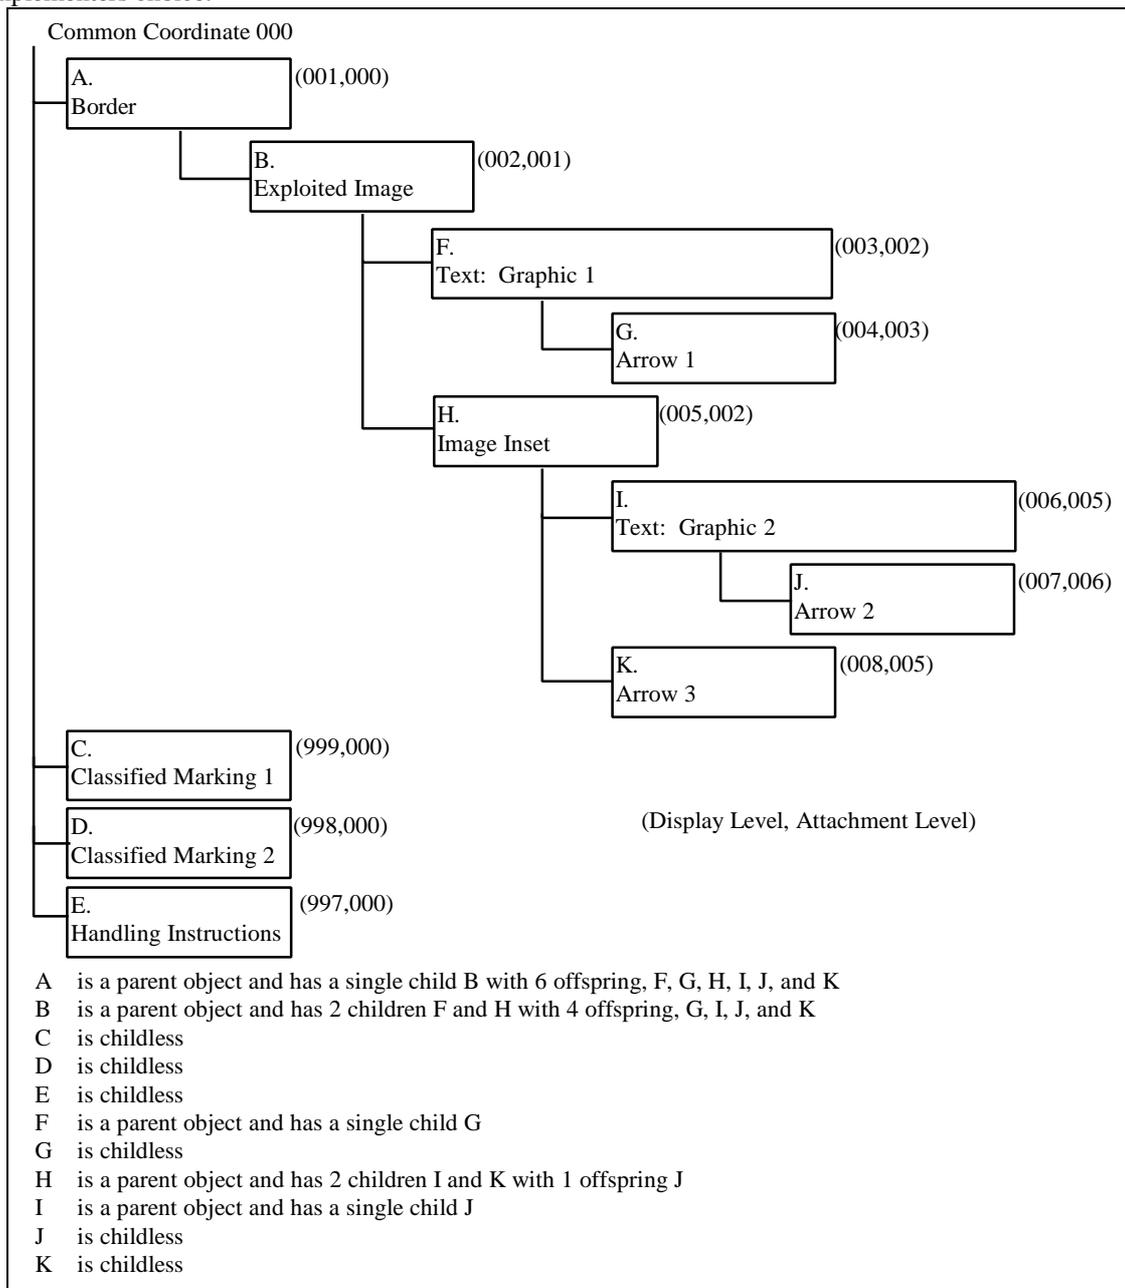


Figure C-5. Attachment Level (ALVL) Relationships

IMAGE DATA

16. General. For the NSIF, the image data encompasses multispectral imagery and images intended to be displayed as monochrome (shades of grey), colour-mapped (pseudocolour), or true colour and may include grid or matrix data intended to provide additional geographic or geo-referencing information.

a. Image Representation (IREP). The Image Representation (IREP) Field contains a valid indicator for the general kind of image represented by the data. It is an indication of the processing required in order to display an image. Valid representation indicators are MONO for monochrome; RGB for red, green, or blue true colour, RGB/LUT for mapped colour; MULTI for multiband imagery, NODISPLY for an image not intended for display, NVECTOR and POLAR for vectors with Cartesian and polar coordinates respectively, and VPH for Synthetic Aperture Radar (SAR) video phase history. In addition, compressed imagery can have this field set to YCbCr601 when represented in the ITU-R Recommendation BT.601-5 colour space using JPEG (if the value of the Image Compression (IC) Field is equal to C3). An image may include

multiple data bands and colour Look-Up Tables (LUTs), the latter within its Header fields. True colour images (three band) may be specified to be interpreted using either the Red, Green, Blue (RGB) or the YCbCr601 (Y = Brightness of signal, Cb = Chrominance (blue), Cr = Chrominance (red)) colour system. Grids or matrix data may include one, two, or several bands of attribute values intended to provide additional geographic or geo-referenced information. VPH requires SAR processing to produce a displayable image. Vectors with Cartesian coordinates (NVECTOR) and vectors with polar coordinates (POLAR) require appropriate vector calculations to produce a displayable image. The processing required to display each band of the image is indicated in the nth Band Representation (IREPBANDn) Field. Table C-1-2 shows representative IREP examples and some of its associated fields.

b. Image Category (ICAT). The specific category of an IS reveals its intended use or the nature of its collector. Valid categories include VIS for visible imagery, SL for side-looking radar, TI for thermal infrared, FL for forward looking infrared, RD for radar, EO for electro-optical, OP for optical, HR for high resolution radar, HS for hyperspectral, CP for colour frame photography, BP for black/white frame photography, SAR for synthetic aperture radar, SARIQ for SAR radio hologram, IR for infrared, MS for multispectral, FP for fingerprints, MRI for magnetic resonance imagery, XRAY for x-rays, CAT for CAT scans, VD for video, BARO for barometric pressure, CURRENT for water current, DEPTH for water depth, and WIND for air wind charts. Valid categories for geographic products or geo-reference support data are MAP for raster maps, PAT for colour patch, LEG for legends, DTEM for elevation models, MATR for other types of matrix data, and LOCG for location grids. SAR data may be included as Video Phase History (VPH) data, as dual band processed complex data, as individual components of processed complex data, or as single band monochrome imagery. The pixels of dual band SAR data (either VPH or processed data) may be stored in band sequential order or interleaved by block, row, or pixel (see IMODE). For VPH the nth Band Subcategory (ISUBCATn) Field contains I and Q (representing Inphase and Quadrature components). For dual band processed complex data, the bands may consist of Inphase and Quadrature values, with the ISUBCATn fields set to I and Q, or may consist of Magnitude and Phase values, with the ISUBCATn fields set to M and P. For individual components of processed complex data, ISUBCATn contains I, Q, M, or P to designate which component is contained in the IS. When SAR data is processed and stored as a single band monochrome image, the ISUBCATn field shall contain BCS Spaces (code 0x20). The possible use of Standard Support Data Extensions (SDEs) to provide geo-referencing data depends on both the intended use of the transmitted image and on its nature as described in Table C-1-2(A). The specific significance of each band in the image is indicated in the ISUBCATn field.

17. Image Model. For the NSIF, an image is a two-dimensional rectangular array of pixels indexed by row and column. A pixel is represented by an n-vector of sample values; where n corresponds to the number of bands comprising the image. The i^{th} entry of the pixel (vector) is the pixel value for the i^{th} band sample of the image. Therefore, the i^{th} band of the image is the rectangular array of i^{th} sample values from the pixel vectors. For an image designated I with R rows and C columns, the coordinates of the Image Pixel located in the c^{th} column of the r^{th} row shall be denoted by an ordered pair (r,c), $0 \leq r < R$, $0 \leq c < C$, where the first number, r, indicates the row and the second number, c, indicates the column in the image array. This notation is standard for addressing arrays and matrices. The pixel located at (r,c) is denoted by I(r,c). For example, a typical 24-bit RGB image is an array of R rows and C columns, where each set of indices (r,c), $0 \leq r < R$, $0 \leq c < C$, identifies a pixel I(r,c) consisting of three single byte values (a three-vector) corresponding to the RGB samples. The image has three bands, each consisting of a R-by-C array of single byte sample values. One band comprises all the red, one band comprises all the green, and the third band comprises all the blue pixel sample values. Specifically, the value at position (r,c) in the green band, for example, contains the green byte from the pixel I(r,c) three-vector at position (r,c) in the image.

a. Display of NSIF Images. When an image with R rows and C columns is displayed, a mapping is accomplished from the stored Image Pixel value array I to a rectangular array S of physical picture elements, for example a Cathode Ray Tube (CRT) display. This mapping will be called the display mapping. Usually, the resulting display has an identified top, bottom, and left and right side. In a particular application, the display mapping may be defined explicitly. However, lacking this, an image stored in a NSIF File shall be interpreted so that pixel I(0,0) is at the upper left corner, and pixel I(R-1,C-1) is at the lower right corner. The r^{th} row of the image array I shall form the r^{th} row of the display, counting from the top, $0 \leq r < R$. Within the r^{th} row, the pixels shall appear beginning on the left with I(r,0) and proceeding from left to right with I(r,1), I(r,2), and so on, ending with I(r, C-1). Figure C-6 illustrates the display mapping just described. This mapping of pixel values to physical picture elements is typical of non-interleaved raster pattern of picture elements. The relationship of the pixels I(r,c) in the array to up, down, left and right implicit in this diagram is used freely in later descriptions to simplify exposition.

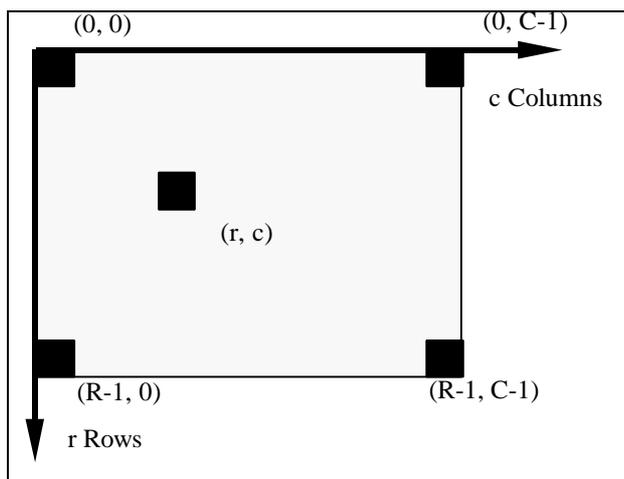


Figure C-6. Image Coordinate Representation

b. Blocked Images. The concept blocked images, extends the image model for NSIF presented above to support the representation of an image in terms of an orderly set of subimages (or subarrays) called blocks. For large images (e.g. those having more horizontal and vertical pixel values than typical display devices), the performance of an imagery implementation can be potentially improved by blocking the image; that is, ordering the pixel values in the NSIF File as a series of concatenated pixel arrays. For multi-blocked imagery, each block must start on a byte boundary.

- (1) The idea behind a blocked image is analogous to a rectangular tiled floor. Regard the overall floor cover as the image and each individual tile as a block. To make this more precise, let I be an image of R rows and C columns, and let the Number of Pixels Per Block Horizontal (NPPBH), (that is, the number of columns of each block) and the Number of Pixels Per Block Vertical (NPPBV), (that is, the number of rows in each block) be positive integers that satisfy $NPPBH \leq C$ and $NPPBV \leq R$. If R is an integral multiple of $NPPBV$ and C is an integral multiple of $NPPBH$, then I may be viewed as an array B of subarrays each having $NPPBV$ rows and $NPPBH$ columns. These subarrays $B_{r,c}$ are called blocks. The block $B_{r,c}$ is in the r^{th} row of blocks and the c^{th} column of blocks. The number of columns of blocks (Number of Blocks Per Row (NBPR)) is the integer $C/NPPBH$ and the number of rows of blocks (Number of Blocks Per Column (NBPC)) is the integer $R/NPPBV$.
- (2) For recording purposes, the image blocks are ordered and indexed sequentially by rows, i.e., $B(1,1) \dots B(1, NBPR)$; $B(2,1) \dots B(2, NBPR)$; $B(NBPC, 1) \dots B(NBPC, NBPR)$. The relation of image blocks to image rows and columns is depicted on Figure C-7(a) using the NSIF display convention described in paragraph 17a. Although the pixel values are placed in the NSIF File as a series of arrays (blocks), the coordinate used to reference any specific pixel remains the same as if the image were not blocked. For example, if $R = C = 2048$ and $NPPBV = NPPBH = 1024$, there will be four blocks in the image I . The second pixel value in $B(1,2)$ has the coordinate $I(0,1025)$ vice the internal index $(0,1)$ of the subarray.
- (3) If the number of rows in an image is not initially an integer multiple of the value of the $NPPBV$ field, or if the number of columns is not an integer multiple of the value of the $NPPBH$ field, an application that creates the blocked image construct in NSIF shall pad the image to an appropriate number of rows and columns so the divisibility condition is met by adding rows to the bottom and/or columns to the right side of the image, as viewed in Figure C-7(b). The result is that a blocked image may have a block(s) (subarray(s)) composed of pixel values from the original image and Pad Pixels inserted to meet block boundary conditions. If R (the number of rows in an image) is not initially an integer multiple of $NPPBV$, then $NBPC$ is the integer $\lceil R/NPPBV \rceil$; if C (the number of columns in an image) is not initially an integer multiple of $NPPBH$, then $NBPR$ is the integer $\lceil C/NPPBH \rceil$ ($\lceil r \rceil =$ largest integer $\leq r$).

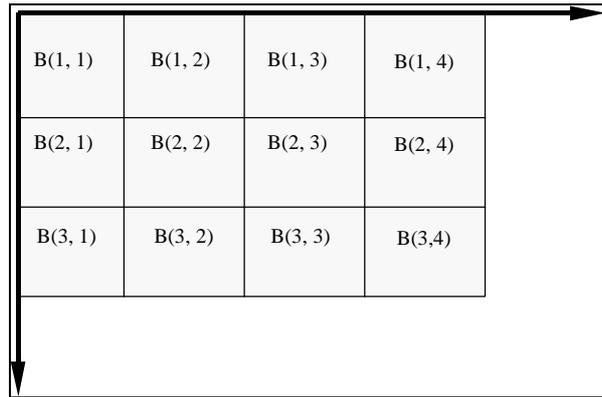


Figure C-7(a). A Blocked Image

c. **Blocked Image Masking.** In some instances, a blocked image may have a considerable number of empty blocks (blocks without meaningful pixel values). This might occur when a rectangular image is not north aligned when scanned or otherwise sampled, but has been rotated to a north up orientation (Figure C-7(c)) resulting in the need to insert Pad Pixels to maintain the rectangular raster pattern of the pixel array. In this case, it is sometimes useful not to record or transmit empty blocks within a NSIF File. However, if empty blocks are not recorded/transmitted, the image loses its logical structure as an image with the number of blocks described by the product of the values of the NBPR field and the NBPC field (NBPR * NBPC). In order to retain logical structure, and to allow the exclusion of empty blocks, an Image Data Mask Table identifies the location of non-empty blocks so that the using application can reconstruct the image correctly. In Figure C-7(c), the recording order would be B(1,1); B(1,2); B(1,3); B(2,1); B(2,2); B(2,3); B(2,4); B(3,1); B(3,2); B(3,3); B(3,4); B(4,2); B(4,3); B(4,4). Blocks B(1,4) and B(4,1) would not be recorded in the NSIF File. The Blocked Image Mask would identify the locations of the recorded image blocks. If the image is band sequential (the value of the IMODE field is equal S), there will be multiple Blocked Image Masks (one for each image band), with each mask containing the number of records described by the product of the values of the NBPR field and the NBPC field (NBPR * NBPC). Blocked Image Masks can be used in conjunction with a Pad Pixel Mask, as described below. A Blocked Image Mask may also be used to provide an index for random access within the blocked image data for large images, even if all blocks are recorded in the NSIF File.

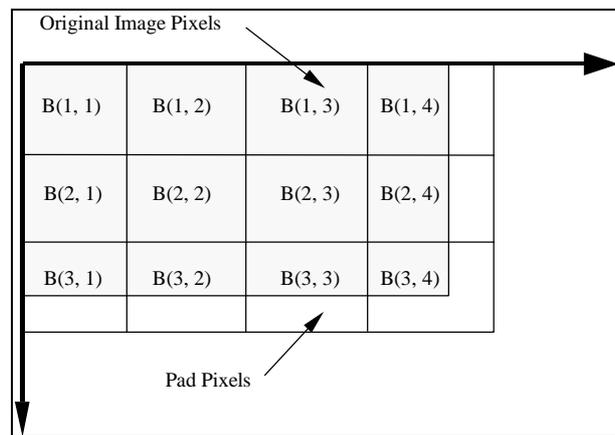


Figure C-7(b). A Blocked, Padded Image

d. **Pad Pixel Masking.** In addition to empty image blocks, Figure C-7(c) also demonstrates that a significant number of Pad Pixels may be needed to fill an image to the nearest block boundary.

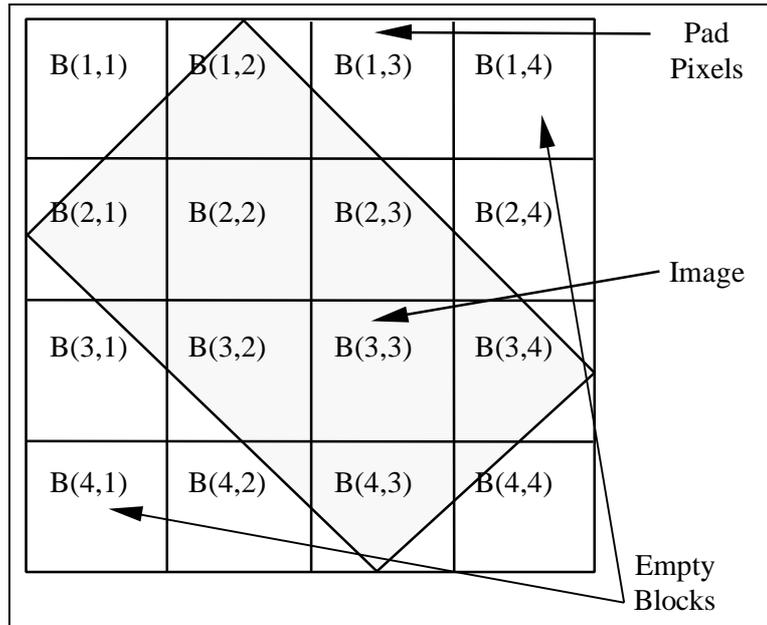


Figure C-7(c). A Blocked, Padded Image with Empty Blocks

- (1) In the example in Figure C-7(c), the locations of blocks B(1,1); B(1,2); B(1,3); B(2,1); B(2,3); B(2,4); B(3,1); B(3,2); B(3,4); B(4,2); B(4,3); and B(4,4) would be recorded indicating that those blocks have Pad Pixels. B(1,4); B(2,2); B(3,3), and B(4,1) do not have Pad Pixels because B(1,4) and B(4,1) are empty and B(2,2) and B(3,3) are full image blocks.
- (2) If the image is band sequential (the IMODE field contains S), there will be pixel masks that will be arranged in the same order as the image bands, with each mask containing the number of records described by the product of the values of the NBPR field and the NBPC field (NBPR * NBPC).
- (3) The output pixel code which represents Pad Pixels is identified within the Image Data Mask by the Pad Output Pixel Code (TPXCD) Field. The length in bits of this code is identified in the Pad Output Pixel Code Length (TPXCDLNTH) Field. Although this length is given in bits, the actual TPXCD value is stored in an integral number of bytes. When the number of bits used by the code is less than the number available in the TPXCD field (for example, a 12 bit code stored in two bytes), then the code will be justified in accordance with the Pixel Justification (PJUST) Field in the Image Subheader.
- (4) When an application identifies Pad Pixel values, it may replace them with a user-defined value (for example, a light blue background) at the time of presentation except when the value of the TPXCD field is Zero (code 0x00). When the value of the TPXCD field is Zero (code 0x00), the Pad Pixel will be treated as transparent for presentation. The application may choose to ignore Pad Pixels in histogram generation. In any case, Pad Pixels are not valid data, and should not be used for interpretation or exploitation.

18. **NSIF Image Information.** In the NSIF, the information describing an image is represented in a series of adjacent fields grouped into the Image Subheader followed by the image data. The field containing the actual image data shall follow immediately the last field of the corresponding Image Subheader with no intervening special characters to designate the beginning of the image. Similarly, the Image Subheader of the first image shall follow immediately the last byte of data of the last field in the NSIF File Header, and the Image Subheader of successive images shall follow immediately the last byte of the image of the preceding image.

a. **Image Subheader.** The data in the Image Subheader Fields provide information about the image source, its identification, and characteristics needed to display and interpret it properly. The Image Subheader Field definitions are detailed in Table C-1-3.

b. Image Data Mask. The Image Data Mask Table is a conditional data structure included in the Image Data Field for masked images when so indicated by the Image Compression (IC) Field value (NM, M1, M3, M4, M5, M6, and M7). The Image Data Mask Table is not recorded for non-masked images (IC values NC, C1, C3, C4, C5, C6, C7, and I1). The Image Data Field of a masked image is identical to that of non-masked images except for the following: the first byte of the image data is offset from the beginning of the Image Data Field by the length of the Image Data Mask Table(s); and empty image blocks are not recorded/transmitted in the image data area. If the image is band sequential (the IMODE field contains S), there will be multiple Blocked Image and/or Pad Pixel Masks (one for each band). All Blocked Image Masks will be recorded first, followed by all Pad Pixel Masks. Since the Image Data Mask Tables are in the image data area, the data recorded/transmitted there are binary. The structure of the Image Data Mask Table is defined in detail in Table C-1-3(A).

c. Image Data Format. Image data may be stored in a NSIF File in either uncompressed or compressed form.

(1) Uncompressed Image Data Format. The order in which pixel values of a single band image are stored is fixed. When an image has more than one band, several options are available for the order in which pixel values are stored. The option used is indicated by the IMODE field in the Image Subheader. The following subparagraphs describe the possibilities within this format. In describing the encoding of image data, the NSIF display convention is invoked freely for ease of expression. Let the image to be encoded be denoted by I, and assume I has R rows and C columns. Let I have n bands; that is, each pixel is an n-vector, the i^{th} value of which is the value for that pixel location of the i^{th} band of the image. Let N denote the Number of Bits per Pixel per Band (NBPP). Thus, there are $n * N$ bits-per-pixel. Let I be blocked with H blocks per row and V blocks per column. Note that special cases such as single band images and single block images are included in this general image by setting $n = 1$, and $H = V = 1$, respectively.

(a) Single Band Image Uncompressed Data Format. For single band images, $n = 1$, and there is only one order for storing pixels. The IMODE field in the Image Subheader shall be set to B for this case. The blocks (one or more) shall be stored, one after the other starting with the upper left block and proceeding first left to right across rows of blocks, one row of blocks after the other, top to bottom. Image data within each block shall be encoded as one continuous bit stream, one pixel value after another, beginning with the N bits of the upper left corner pixel, $I(0,0)$, followed by the N bits of $I(0,1)$ and so on until all pixels from the first row in the block are encoded. These shall be followed immediately by the N bits of data for pixel $I(1,0)$ continuing from left to right along each row, one row after another from the top of the block to the bottom. The last byte of each block's data is filled with binary zeros to the next byte boundary, but all other byte boundaries within the block are ignored. (The Pixel Value Type (PVTTYPE) Field description in Table C-1-3 describes the specification of the bit representation of pixel values.)

(b) Multiple Band Image Uncompressed Data Format. For multiple band images, there are four orders for storing pixels.

{1} Band Sequential. The first case is band sequential, in which each band is stored contiguously, starting with the first band, one after the other, until the last band is stored. Within each band the data shall be encoded as if it were a single band image with one or more blocks (paragraph 18c(1)(a)). The value of the IMODE field in the Image Subheader shall be set to S for this case. This case is only valid for images with multiple blocks and multiple bands. (For single block images, this case collapses to the band interleaved by block case where the value of the IMODE field is set to B.)

{2} Band Interleaved by Pixel. The ordering mechanism for this case stores the pixels in a block sequential order in which each block is stored contiguously, starting with the upper left block and proceeding first left to right across rows of blocks, one row of blocks after the other, top to bottom. For band interleaved by pixel the $n * N$ bits of the entire pixel vector are stored pixel-by-pixel in the same left to right, top to bottom pixel order as described in paragraph 18c(1)(a). The $n * N$ bits for a single pixel are stored successively in this order: the N bits of the first band followed by the N bits of the second band and, so forth, ending with the N bits of the last band. Each block shall be zero-filled to the byte boundary. The value of the IMODE field in the Image Subheader shall be set to P for this storage option. (The PVTTYPE field description in Table C-1-3 describes the specification of the bit representation of pixel values for each band.)

{3} Band Interleaved by Block. The ordering mechanism for this case stores the pixels in a block sequential order where each block is stored contiguously, starting with upper left block and proceeding first left to right across rows of blocks, one row of blocks after the other, top to bottom. For band interleaved by block the data from each block is stored starting with the first band, one after the other until the last band is stored. Each block shall be zero-filled to the next byte boundary. The value of the IMODE field in the Image Subheader shall be set to B for this storage option. (The PVTTYPE field description in Table C-1-3 describes the specification of the bit representation of pixel values for each band.)

{4} Band Interleaved by Row. The ordering mechanism for this case stores the pixel values of each band in row sequential order. Within each block, all pixel values of the first row of the first band are followed by pixel value of the first row of the second band continuing until all values of the first row are stored. The remaining rows are stored in a similar fashion until the last row of values has been stored. The value of the IMODE field shall be set to R for this option.

(2) Compressed Image Data Format. The format of the image data after compression is provided with the description of the NSIF Image Compression Algorithms in ITU-T RECMN T.4 AMD2, ISO/IEC 10918-1, ISO/IEC DIS 10918-3, and ISO/IEC IS 12087-5. Also found in these references are the conditions the data must meet before a given compression method can be applied.

d. Grey Scale Look-Up Tables (LUT). The grey scale to be used in displaying each pixel of a grey scale image is determined using the image's LUT, if present. A LUT for a grey scale image when present, shall comprise a one byte entry for each integer (the entry's index) in the range 0 to Number of LUT Entries for the n^{th} Image Band (NELUT n)-1. The bytes of the LUT shall appear in the NSIF File one after the other without separation. The entries shall occur in the index order, the first entry corresponding to index 0, the second to index 1 and so on, the last corresponding to index NELUT n -1. The display shade for a pixel in the image shall be determined by using the Image Pixel value as an index into the LUT. The LUT value shall correspond to the display grey shade in a way specific to the display device. NELUT n shall be equal to or greater than the maximum pixel value in the image to ensure that all Image Pixels are mapped to the display device.

e. Colour Look-Up Tables (LUT). Colour images are represented using the RGB colour system notation. For colour images, each LUT entry shall be composed of the output colour components red, green, and blue, appearing in the NSIF File in that order. There shall be a LUT entry for each pixel value in a particular band of a NSIF image (the entries index of the LUT will range from 0 to $2^{\text{NBPP}}-1$). The LUT entries shall appear in the NSIF File in increasing index order beginning with index 0. The display colour of an Image Pixel shall be determined by using the pixel value as an index into each LUT (red, green, blue). The corresponding values for red, green, and blue shall determine the displayed colour in a manner specific to the display device. The colour component values may be any of the 256 pixel values associated with the band. The presence of colour LUTs is optional for 24-bit per pixel (true colour) images. Pseudo-colour (e.g. 8-bit per pixel colour images) shall contain a LUT to correlate each pixel value with a designated true colour value. Pixels larger than 16 bits may not be mapped with a NSIF LUT and NSIF LUT values can be no larger than 8 bits.

GRAPHIC DATA

19. General. Graphic data is used in the NSIF to store two-dimensional information represented as a CGM. Each GS consists of a Graphic Subheader and a Data Field. A graphic may be black and white, grey scale, or colour. Examples of graphics are circles, ellipses, rectangles, arrows, lines, triangles, logos, unit designators, object designators (ships, aircraft), text, and special characters. A graphic is stored as a distinct unit in the NSIF File allowing it to be manipulated and displayed non-destructively relative to the images, and other graphics in the NSIF File. This STANAG does not preclude the use of n-dimensional graphics when future standards are developed.

20. Graphic Subheader. The Graphic Subheader is used to identify and supply the information necessary to display the graphic data as intended by the NSIF File builder. The format for a Graphic Subheader is detailed in Table C-1-5.

21. Graphic Data Format. The graphic format is CGM as described in ISO/IEC 8632-1. The precise tailoring of the CGM standard to NSIF is found in MIL-STD-2301A.

22. CGM Graphic Bounding Box. CGM graphic placement is defined by the SLOC field and the CGM graphic extent is given by the First Graphic Bound Location (SBND1) and Second Graphic Bound Location (SBND2) Fields. SLOC defines the origin for the CGM Coordinate System. The area covered by the CGM graphic is defined by a bounding box. The bounding box is the smallest rectangle that could be placed around the entire CGM graphic. The first bounding box coordinate (SBND1) is the upper left corner of the rectangle. The second bounding box coordinate (SBND2) is the lower right corner of the rectangle. SBND1 and SBND2 are values in the coordinate system defined by the ALVL. For ALVL000, this would be the CCS. The SBND1 and SBND2 values are calculated by adding SLOC to the coordinate values for the bounding box (upper left and lower right) corners as given in the CGM Coordinate System.

FUTURE DATA (RESERVED SEGMENTS (RS))

23. Reserved Segments (RS). The RS are place holders to support the expansion of the Reserved for Future Use (NUMX) Field within the NSIF File Header for a future standard data type, that has yet to be defined.

TEXT DATA

24. General. Text data shall be used to store textual data or unformatted text. Text is intended to convey information about an associated Segment in the NSIF File.

25. Representation of Textual Information. The Text Format (TXTFMT) Field contains a three character code which indicates the type or format of text data contained in the TS. The allowable field values are STA, MTF, UT1, or U8S.

a. Standard (STA). STA designates BCS character codes in a simple format. Any BCS code may be used in the Text Data Segment when STA is indicated in the TXTFMT field. All lines within Text Data Segment shall be separated by Carriage Return/Line Feed pairs. A Carriage Return followed by a Line Feed shall be used to delimit lines in the text where the first character from the next line immediately follows the Line Feed character.

b. Message Text Format (MTF). MTF indicates that the Text Data Segment contains BCS characters formatted according to STANAG 5500.

c. Extended Character Set Text Formatting (UT1). This is a legacy formatting that is replaced by the U8S text formatting. ECS text formatting uses ECS character codes. Any ECS code may be used in the Text Data Segment when UT1 is indicated in the TXTFMT field. All lines within the TS shall be separated by Carriage Return/Line Feed pairs. A Carriage Return followed by a Line Feed shall be used to delimit lines in the text where the first character from the next line immediately follows the Line Feed character.

d. U8S Text Formatting (U8S). The U8S text formatting replaces the legacy ECS text formatting (UT1). U8S text formatting uses U8S character codes. Any U8S character (either 1-byte or 2-byte encoded) may be used in the Text Data Segment when U8S is indicated in the TXTFMT field. All lines within Text Data Segment shall be separated by Carriage Return/Line Feed pairs. A Carriage Return followed by a Line Feed shall be used to delimit lines in the text where the first character from the next line immediately follows the Line Feed character.

26. Text Subheader. The Text Subheader is used to identify and supply the information necessary to read and display the text within the Data Field. The Text Subheader is detailed in Table C-1-6.

27. Data Extensions. Data extensions are provided to extend NSIF functionality with minimal impact on the underlying Standard document. There are three types of data extensions: Tagged Record Extension (TRE), Data Extension Segment (DES), and Reserved Extension Segment (RES). All these extensions may be incorporated into the NSIF File while maintaining backward compatibility. The data extension identifier and byte count mechanisms allow applications developed prior to the addition of newly defined data, to skip over extension fields that they are not designed to interpret.

a. Tagged Record Extension (TRE). A TRE is a collection of Data Fields that provides space within the NSIF File Structure for adding, as yet unspecified, future capabilities to the Standard. A TRE is used to extend NSIF by adding additional attributes to designated fields in the NSIF File Header (Table C-1-1) and in the IS, TS, and GS Subheaders (Tables C-1-3, C-1-5, and C-1-6). Each TRE consists of three required

fields that are defined in Table C-1-7. There are two similar, but different, TRE types: Controlled Extensions (CE) and Registered Extensions (RE). The principles are described below and illustrated in Figure C-8.

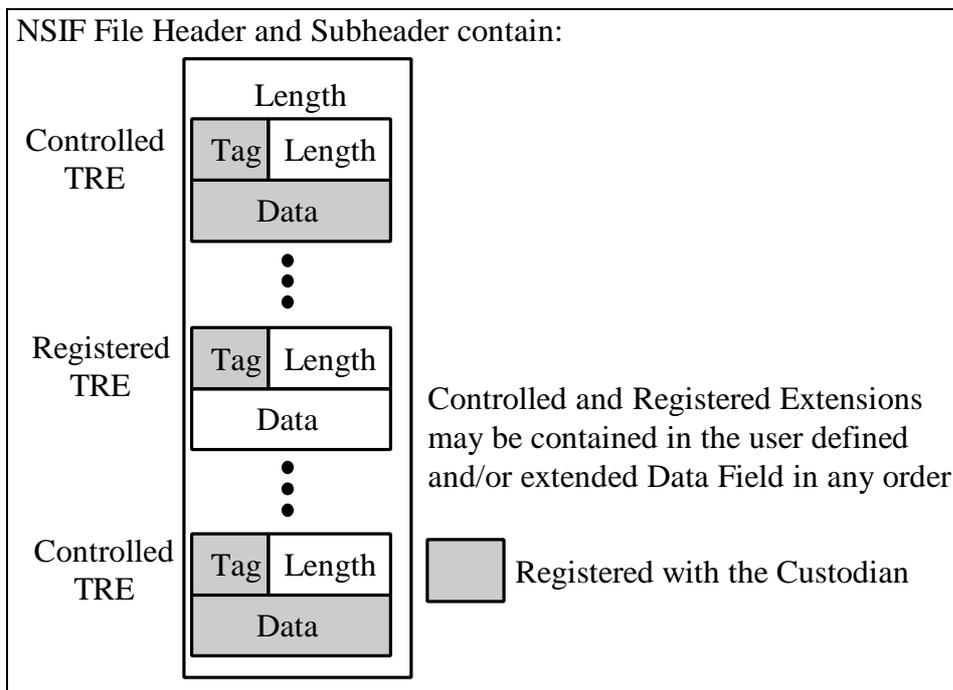


Figure C-8. Tagged Record Extensions (TRE)

(1) **Controlled Extension (CE).** A CE allows additional data constructs within a NSIF File with the consensus of the community. For a CE, both the Unique Extension Type Identifier (CETAG) and the specification contained in the User-Defined Data (CEDATA) Field are subject to full registration and configuration control by the Custodian. Upon receipt of a NSIF File that contains a CE, a NSIF compliant implementation that is not designed to interpret that CE shall ignore it and properly interpret the other NSIF File components.

(2) **Registered Extension (RE).** A RE allows NSIF users to establish user defined data constructs within a NSIF File without community consensus. RE use is considered private in the sense that a specific RE is meaningful only to NSIF users who have agreed to its use. The structure and content of the User-Defined Data (REDATA) Field does not need to be configuration managed. However to prevent duplication, each newly defined RETAG must be registered, along with its name and purpose, with the Custodian. Upon receipt of a NSIF File that contains a RE, a NSIF compliant system that is not designed to interpret that RE shall ignore it and properly interpret the other NSIF File components.

(3) **TRE Placement.** A sequence of TRE can be used in the NSIF File Header User Defined Data (UDHD) Field, in any Image Subheader's User Defined Image Data (UDID) Field, in Extended Header and Extended Subheader (XHD, IXSHD, SXSHD, TXSHD) Fields, and in a DES that is designated to contain TRE Overflow (TRE_OVERFLOW). When the TRE carries data associated with the NSIF File and sufficient room is available, it should appear in the NSIF File Header. If the TRE carries data associated with a Segment and sufficient room is available in the Segment's Subheader, the data should appear in the Segment's Subheader. When sufficient room is not available in the NSIF File Header or the Segment's Subheader, the TRE may be placed in the TRE_OVERFLOW DES (paragraph 27c(1)). The entire TRE shall be included within the NSIF File Header, Subheader, or DES that has been selected to contain it.

(4) **TRE Registry.** A current listing of the TRE that are registered with the Custodian is provided in the Data Extension Registry maintained by the Joint Interoperability Test Command (JITC).

b. **Data Extension Segment (DES).** The DES structure allows the Format to include different data types within a NSIF File. Each data type is encapsulated in its own DES. Each DES can carry only one data type,

but a NSIF File can contain multiple DES. Multiple DES contained in one NSIF File can be of the same or different data types. Each encapsulated extension shall appear in its own DES and shall conform to the DES structure contained in Table C-1-9. There are two DES type identifiers defined in the Standard document: TRE Overflow (TRE_OVERFLOW) and Streaming File Header (STREAMING_FILE_HEADER). Examples of future data types are: augmenting imagery (with voice annotations, video clip annotations, video/voice annotations, animated graphics) and Transportable File Structures (TFS).

(1) DES Use. The following rules apply to DES usage.

- (a) Only those DES accepted and registered by the Custodian shall be used.
- (b) Upon receipt of a NSIF File that contains one or more DES, a NSIF compliant system that is not designed to interpret that DES shall ignore it and properly interpret the other NSIF File components.
- (c) NSIF implementations that support a specific DES shall comply with the minimum conformance requirements specified in the DES description.

(2) DES Structure. The NSIF File Header accommodates up to 999 DES. Each DES shall consist of a DES Subheader and a DES User-Defined Data (DESDATA) Field (similar to the way a Standard Data Segment has a Subheader and an adjacent associated Data Field). The DES Group in the NSIF File Header contains the number of DES in the NSIF File, the length (size) of each DES Subheader, and the length (size) of the DESDATA field. The field size specifications in the NSIF File Header allow each DES to be just less than one gigabyte in length. The DES Subheader shall contain the fields defined in Table C-1-8. The DES structure includes a mechanism for defining additional DES Subheader fields (DES User-Defined Subheader Length (DESSL) Field and DES User-Defined Subheader Fields (DESSH) Field), and for defining encapsulated data (DESDATA). This structure encourages the formation of a specific DES in a manner similar to the way Standard Data Segments group fields (Subheader fields) that describe the data and follow it with the data.

c. Defined DES. Additional DES, registered by the Custodian, will be maintained in the JITC's Data Extension Registry.

(1) Tagged Record Extension Overflow (TRE_OVERFLOW) DES. The TRE_OVERFLOW DES is used for encapsulating a series of TRE in a DES as overflow from the NSIF File Header or any Segment's Subheader. A separate DES is used for each NSIF File Header or Subheader field that overflows. Which NSIF File Header or Subheader field overflowed is indicated in the DES Overflowed Header Type (DESOFLOW) Field and DES Data Segment Overflowed (DESITE) Field contents. The TRE_OVERFLOW DES for encapsulating TRE is defined in Table C-1-8(A).

(2) Streaming File Header (STREAMING_FILE_HEADER) DES. As described in paragraph 10a, NSIF provides the STREAMING_FILE_HEADER to allow NSIF File creation or transfer before all NSIF File Header fields are populated. Table C-1-8(B) contains the STREAMING_FILE_HEADER field names, sizes, value ranges, and types. When an intentionally incomplete NSIF File Header is encountered, the NSIF File shall be processed by using the NSIF File Header values located in the STREAMING_FILE_HEADER. When used, the STREAMING_FILE_HEADER is located at or near the end of the NSIF File. To facilitate locating the DES, the STREAMING_FILE_HEADER contains two unique delimiter fields (SFH - Delimiter 1 (SFH-DELIM1) Field and SFH - Delimiter 2 (SFH-DELIM2) Field). The SFH-DELIM1 field precedes the STREAMING_FILE_HEADER and the SFH-DELIM2 field follows the STREAMING_FILE_HEADER. The SFH-DELIM1 field is preceded by the SFH Length 1 (SFH-L1) Field and the SFH-DELIM2 field is followed by the SFH Length 2 (SFH-L2) Field. The SFH-L1 and SFH-L2 fields are placed to ensure valid delimiters are found. The value of the SFH-DELIM1 field shall be equal to the value of the SFH-DELIM2 field, the value of the SFH-L1 field shall be equal to the value of the SFH-L2 field, and the number of characters between the SFH-DELIM1 field and the SFH-DELIM2 field must be equal to the value of the SFH-L1 and SFH-L2 fields. The STREAMING_FILE_HEADER may contain a complete NSIF File Header, a subset of the NSIF File Header, or may extend beyond the NSIF File Header to include fields within the subsequent Image Subheader and beyond. If the NSIF File contains more than one DES, the STREAMING_FILE_HEADER shall be the final DES.

d. Reserved Extension Segments (RES). The RES structure is designated for future use and provides a mechanism for, yet further, expansion of the Standard. A RES Subheader shall contain the fields defined in Table C-1-9. RES that are registered with the Custodian will be maintained in the JITC's Data Extension Registry.

(1) RES Use. The following rules apply to RES usage.

- (a) Only those RES accepted and registered by the Custodian shall be used.
- (b) Upon receipt of a NSIF File that contains a RES, a NSIF compliant implementation that is not designed to interpret that RES shall ignore it and properly interpret the other NSIF File components.
- (c) NSIF implementations that support a specific RES shall comply with the minimum conformance requirements specified in the RES description.

(2) RES Structure. The NSIF File Header accommodates up to 999 RES. Each RES shall consist of a RES Subheader and a RES User-Defined Data (RESDATA) Field (similar to the way a Standard Data Segment has a Subheader and an adjacent associated data field). The RES Group in the NSIF File Header contains the number of RES in the NSIF File, the length (size) of each RES Subheader, and length (size) of the RESDATA field. The field size specifications in the NSIF File Header allow each RES to be just less than ten megabytes in length. The RES Subheader shall contain the fields defined in Table C-1-9. The RES structure includes a mechanism for defining additional RES Subheader fields (RES User-Defined Subheader Length (RESSHL) Field and RES User-Defined Subheader Fields (RESSHF) Field), and for defining encapsulated data (RESDATA). This structure encourages the formation of a specific RES in a manner similar to the way Standard Data Segments group fields (Subheader fields) that describe the data and follow it with the data.

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX 1 TO ANNEX C. NSIF TABLES

Table C-1-1. NSIF File Header

TYPE R = Required, C = Conditional, <> = BCS Spaces (code 0x20) are allowed for the entire field
(† annotations are explained at the end of the table)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
FHDR	<u>File Profile Name</u> . This field shall contain the BCS-A character string uniquely denoting that the file is formatted using NSIF. The valid value for this field is NSIF.	4	BCS-A NSIF	R
FVER	<u>File Version</u> . This field shall contain a BCS-A character string uniquely denoting the version. The valid value for this field is 01.00.	5	BCS-A 01.00	R
CLEVEL	<u>Complexity Level</u> . This field shall contain the Complexity Level required to interpret fully all components of the NSIF File. Valid entries are integer assigned in accordance with complexity requirements established in Annex E.	2	BCS-N positive integer 01 to 99	R
STYPE	<u>Standard Type</u> . Standard type or capability. This field shall contain the BCS-A character string BF01 which indicates that this NSIF File is formatted using ISO/IEC IS 12087-5. NSIF is intended to be registered as a profile of ISO/IEC IS 12087-5.	4	BCS-A BF01	R
OSTAID	<u>Originating Station Identifier</u> . This field shall contain the identification code of the originating organisation.	10	BCS-A	R
FDT	<u>File Date and Time</u> . This field shall contain the time (Universal Time Code (UTC)) (Zero Meridian (Zulu)) of the NSIF File's origination in the format CCYYMMDDhhmmss, where CC is the century (00 to 99), YY is the last two digits of the year (00 to 99), MM is the month (01 to 12), DD is the day (01 to 31), hh is the hour (00 to 23), mm is the minute (00 to 59), and ss is the second (00 to 59). UTC (Zulu) is assumed to be the time zone designator to express the time of day.	14	BCS-N positive integer CCYYMMDDhhmmss	R
FTITLE	<u>File Title</u> . This field shall contain the title of the NSIF File or shall be filled with BCS Spaces (code 0x20).	80	BCS-A (Default is BCS Spaces (0x20))	<R>
FSCLAS	<u>File Security Classification</u> . This field shall contain a valid value representing the classification level of the entire NSIF File. Valid values are T for Top Secret, S for Secret, C for Confidential, R for Restricted, or U for Unclassified.	1	BCS-A T, S, C, R, or U	R
NOTE: If the value of the FSCLAS field is T, S, C, or R, then the FSCLSY field must be populated with a valid code for the security classification system used.				
FSCLSY	<u>File Security Classification System</u> . This field shall contain valid values indicating the national or multinational security system used to classify the NSIF File. Country Codes per FIPS PUB 10-4 are used to indicate national security systems. If this field is all BCS Spaces (code 0x20), it shall imply that no Security Classification System applies to the NSIF File.	2	BCS-A BE, CA, DA, FR, GM, GR, IC, IT, LU, NL, NO, PO, SP, TU, UK, US NS represents NATO Security System. Additional codes shall be registered with the Custodian. (Default is BCS Spaces (0x20))	<R>

Table C-1-1. NSIF File Header (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
NOTE: If any of the following fields are populated with anything other than spaces, then the FSCLSY field must be populated with a valid code for the security classification system used: FSCODE, FSREL, FSDCTP, FSDCDT, FSDCXM, FSDG, FSDGDT, FSCLTX, FSCATP, FSCAUT, FSCRSN, FSSRDT, and FSCTLN.				
FSCODE	<u>File Codewords</u> . This field shall contain a valid indicator of the security compartments associated with the NSIF File. Values include one or more of the digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). Multiple entries shall be separated by a single BCS Space (code 0x20). The selection of a relevant set of Codewords is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no Codewords apply to the NSIF File.	11	BCS-A (Default is BCS Spaces (0x20))	<R>
FSCTLH	<u>File Control and Handling</u> . This field shall contain valid additional security Control and/or Handling instructions (caveats) associated with the NSIF File. Values include digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). The digraph may indicate single or multiple caveats. The selection of a relevant caveat(s) is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no additional NSIF File Control and Handling instructions apply.	2	BCS-A (Default is BCS Spaces (0x20))	<R>
FSREL	<u>File Releasing Instructions</u> . This field shall contain a valid list of countries outside of NATO to which the NSIF File is valid for release. Typical values include one or more country codes as found in FIPS PUB 10-4 separated by a single BCS Space (code 0x20). If this field is all BCS Spaces (code 0x20), it shall imply that no NSIF File Releasing instructions apply.	20	BCS-A (Default is BCS Spaces (0x20))	<R>
FSDCTP	<u>File Declassification Type</u> . This field shall contain a valid indicator of the type of security Declassification or Downgrading instructions which apply to the NSIF File. Valid values are DD for declassify on a specific date, DE for declassify upon occurrence of an event, GD for downgrade to a specified level on a specific date, GE for downgrade to a specified level upon occurrence of an event, O for OADR, and X for exempt from automatic declassification. If this field is all BCS Spaces (code 0x20), it shall imply that no NSIF File security Declassification or Downgrading instructions apply.	2	BCS-A DD, DE, GD, GE, O, X (Default is BCS Spaces (0x20))	<R>
FSDCDT	<u>File Declassification Date</u> . This field shall indicate the date on which a NSIF File is to be declassified if the value of the FSDCTP field is DD. If this field is all BCS Spaces (code 0x20), it shall imply that no NSIF File Declassification date applies.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>

Table C-1-1. NSIF File Header (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
FSDCXM	<u>File Declassification Exemption</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the reason the NSIF File is exempt from automatic declassification if the value of the FSDCTP field is X. Valid values are X1 to X8 and X251 to X259. X1 to X8 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-202b(1) to (8) for material exempt from the 10-year rule. X251 to X259 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-301a(1) to (9) for permanently valuable material exempt from the 25-year declassification system. If this field is all BCS Spaces (code 0x20), it shall imply that a NSIF File Declassification Exemption does not apply.	4	BCS-A X1 to X8, X251 to X259, (Default is BCS Spaces (0x20))	<R>
FSDG	<u>File Downgrade</u> . This field shall indicate the classification level to which a NSIF File is to be downgraded if the value of the FSDCTP field is GD or GE. Valid values are S for Secret, C for Confidential, and R for Restricted. If this field contains a BCS Space (code 0x20), it shall imply that NSIF File Downgrade does not apply.	1	BCS-A S, C, R (Default is BCS Space (0x20))	<R>
FSDGDT	<u>File Downgrade Date</u> . This field shall indicate the date on which a NSIF File is to be downgraded if the value of the FSDCTP field is GD. If this field is all BCS Spaces (code 0x20), it shall imply that a NSIF File Downgrading date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>
FSCLTX	<u>File Classification Text</u> . This field shall be used to provide additional information about NSIF File classification to include identification of a declassification or downgrading event if the value of the FSDCTP field is DE or GE. It may also be used to identify multiple classification sources and/or any other special handling rules. Values are user-defined free text. If this field is all BCS Spaces (code 0x20), it shall imply that additional information about NSIF File classification does not apply.	43	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
FSCATP	<u>File Classification Authority Type</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the type of authority used to classify the NSIF File. Valid values are O for original Classification Authority, D for derivative from a single source, and M for derivative from multiple sources. If this field contains a BCS Space (code 0x20), it shall imply that a File Classification Authority does not apply.	1	BCS-A O, D, M (Default is BCS Space (0x20))	<R>

Table C-1-1. NSIF File Header (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
FSCAUT	<u>File Classification Authority</u> . This field is not for general use but may be employed by some national systems. This field shall identify the Classification Authority for the NSIF File dependent upon the value of the FSCATP field. Values are user-defined free text which should contain the following information: original Classification Authority name and position or personal ID if the value of the FSCATP field is O; title of the document or security classification guide used to classify the NSIF File if the value of the FSCATP field is D; and Derive-Multiple if the NSIF File classification was derived from multiple sources and the value of the FSCATP field is M. In the latter case, the NSIF File originator will maintain a record of the sources used in accordance with existing security directives. One of the multiple sources may also be identified by the FSCLTX field if desired. If this field is all BCS Spaces (code 0x20), it shall imply that a NSIF File Classification Authority does not apply.	40	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
FSCRSN	<u>File Classification Reason</u> . This field is not for general use but may be employed by some national systems. This field shall contain values indicating the reason for classifying the NSIF File. Valid values are A to G. These correspond to the reasons for original classification per E.O. 12958, Section 1.5.(a) to (g). If this field contains a BCS Space (code 0x20), it shall imply that no NSIF File Classification Reason applies.	1	BCS-A A to G (Default is BCS Space (0x20))	<R>
FSSRDT	<u>File Security Source Date</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the date of the source used to derive the classification of the NSIF File. In the case of multiple sources, the date of the most recent source shall be used. If this field is all BCS Spaces (code 0x20), it shall imply that a NSIF File Security Source date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>
FSCTLN	<u>File Security Control Number</u> . This field is not for general use but may be employed by some national systems. This field shall contain a valid Security Control Number associated with the NSIF File. The format of the Security Control Number shall be in accordance with the regulations governing the appropriate security channel(s). If this field is all BCS Spaces (code 0x20), it shall imply that no File Security Control Number applies.	15	BCS-A (Default is BCS Spaces (0x20))	<R>
FSCOP	<u>File Copy Number</u> . This field shall contain the File Copy Number of the NSIF File. If the value of this field is all BCS Zeros (code 0x30), it shall imply that there is no tracking of numbered NSIF File copies.	5	BCS-N positive integer 00000 to 99999 (Default is BCS Zeros (0x30))	R
FSCPYS	<u>File Number of Copies</u> . This field shall contain the total Number of Copies of the NSIF File. If this field is all BCS Zeros (code 0x30), it shall imply that there is no tracking of numbered NSIF File copies.	5	BCS-N positive integer 00000 to 99999 (Default is BCS Zeros (0x30))	R

Table C-1-1. NSIF File Header (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
ENCRYP	<u>Encryption</u> . This field shall contain the value BCS Zero (code 0x30) until such time as this specification is updated to define the use of other values.	1	BCS-N positive integer 0 implies not encrypted (Default is BCS Zero (0x30))	R
FBKGC	<u>File Background Colour</u> . This field shall contain the three colour components of the NSIF File background in the order Red, Green, Blue. Where (0x00, 0x00, 0x00) is black and (0xFF, 0xFF, 0xFF) is white.	3	Unsigned binary integer (0x00 to 0xFF, 0x00 to 0xFF, 0x00 to 0xFF)	<R>
ONAME	<u>Originator's Name</u> . This field shall contain a valid name for the operator who originated the NSIF File. If the value of this field is all BCS Spaces (code 0x20), it shall denote that no operator is assigned responsibility for origination.	24	BCS-A (Default is BCS Spaces (0x20))	<R>
OPHONE	<u>Originator's Phone Number</u> . This field shall contain a valid phone number for the operator who originated the NSIF File. If the value of this field is all BCS Spaces (code 0x20), it shall denote that no phone number is available for the operator assigned responsibility for origination.	18	BCS-A (Default is BCS Spaces (0x20))	<R>
FL	<u>File Length</u> . This field shall contain the length in bytes of the entire NSIF File including all Headers, Subheaders, and data. Note: The largest file is limited to 99999999998 ($10^{12} - 2$) bytes. A value of 99999999999 in this field indicates that the actual NSIF File length was not available when the NSIF File Header was created (paragraph 10a).	12	BCS-N positive integer 00000000388 to 99999999998, 99999999999	R
HL	<u>NSIF File Header Length</u> . This field shall contain a valid length in bytes of the NSIF File Header.	6	BCS-N positive integer 000388 to 999999	R
NUMI	<u>Number of Image Segments</u> . This field shall contain the number of separate ISs included in the NSIF File. The value of this field shall be all BCS Zeros (code 0x30) if no ISs are included in the NSIF File.	3	BCS-N positive integer 000 to 999 (Default is BCS Zeros (0x30))	R
. Start for each Image Segment LISHn, LIn.				
NOTE: LISHn and LIn fields repeat in pairs as follows LISH001, LI001; LISH002, LI002; LISHn, LIn (if the value of the NUMI field is not equal to zero).				
LISHn	<u>Length of nth Image Subheader</u> . This field shall contain a valid length in bytes for the n th Image Subheader, where n is the number of the IS(s), counting from the first IS (n=001) in order of the ISs' appearance in the NSIF File. Possible values for n are: 001 to 999. This field shall occur as many times as specified by the value of the NUMI field. This field is conditional and shall be omitted if the NUMI field contains BCS Zeros (code 0x30). Note: The largest Image Subheader is limited to 999998 ($10^6 - 2$) bytes. A value of 999999 in this field indicates that the actual Image Subheader length was not available when the NSIF File Header was created (paragraph 10a).	6	BCS-N positive integer 000439 to 999998, 999999	C

Table C-1-1. NSIF File Header (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
LIn	<u>Length of nth Image Segments</u> . This field shall contain a valid length in bytes of the data field of the n th IS, where n is the number of the IS, counting from the first IS (n = 001) in order of the ISs' appearance in the NSIF File. Possible values for n are: 001 to 999. If the IS is compressed, the length after compression shall be used. This field shall occur as many times as specified by the value of the NUMI field. This field is conditional and shall be omitted if the NUMI field contains BCS Zeros (code 0x30). Note: The largest IS is limited to 9999999998 (10 ¹⁰ - 2) bytes. A value of 9999999999 in this field indicates that the actual IS length was not available when the NSIF File Header was created (paragraph 10a).	10	BCS-N positive integer 0000000001 to 9999999998, 9999999999	C
. . . . End for each Image Segment LISHn, LIn; the number of loop repetitions is the value specified in the NUMI field.				
NUMS	<u>Number of Graphics Segments</u> . This field shall contain the number of separate GSs included in the NSIF File. The value of this field shall be BCS Zeros (code 0x30) if no GSs are included in the NSIF File.	3	BCS-N positive integer 000 to 999	R
. Start for each Graphic Segment LSSHn, LSn.				
NOTE: LSSHn and LSn fields repeat in pairs as follows LSSH001, LS001; LSSH002, LS002; LSSHn, LSn (if the value of the NUMS field is not equal to zero).				
LSSHn	<u>Length of nth Graphic Subheader</u> . This field shall contain a valid length in bytes of the data field of the n th Graphic Subheader, where n is the number of the GS, counting from the first GS (n=001) in the order of the GSs' appearance in the NSIF File. Possible values for n are: 001 to 999. This field shall occur as many times as specified by the value of the NUMS field. This field is conditional and shall be omitted if the NUMS field contains BCS Zeros (code 0x30). Note: The largest Graphic Subheader is limited to 9998 (10 ⁴ - 2) bytes. A value of 9999 in this field indicates that the actual Graphic Subheader length was not available when the NSIF File Header was created (paragraph 10a).	4	BCS-N positive integer 0258 to 9998, 9999	C
LSn	<u>Length of nth Graphic Segment</u> . This field shall contain a valid length in bytes of the n th GS, where n is the number of the GS, counting from the first GS (n = 001) in the order of the GS's appearance in the NSIF File. Possible values for n are: 001 to 999. This field shall occur as many times as specified by the value of the NUMS field. This field is conditional and shall be omitted if the NUMS field contains BCS Zeros (code 0x30). Note: The largest GS is limited to 999998 (10 ⁶ - 2) bytes. A value of 999999 in this field indicates that the actual GS length was not available when the NSIF File Header was created (paragraph 10a).	6	BCS-N positive integer 000001 to 999998, 999999	C
. . . . End for each Graphic Segment LSSHn, LSn; the number of loop repetitions is the value specified in the NUMS field.				
NUMX	<u>Reserved for Future Use</u> . This field is reserved for future use and shall be filled with BCS Zeros (code 0x30).	3	BCS-N positive integer 000	R
NUMT	<u>Number of Text Segments</u> . This field shall contain the number of separate TSs included in the NSIF File. The value of this field shall be BCS Zeros (code 0x30) if no TSs are included in the NSIF File.	3	BCS-N positive integer 000 to 999 (Default is BCS Zeros (0x30))	R

Table C-1-1. NSIF File Header (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
. Start for each Text Segment LTSHn, LTn.				
NOTE: LTSHn and LTn fields repeat in pairs as follows LTSH001, LT001; LTSH002, LT002; LTSHn, LTn (if the value of the NUMT field is not equal to zero).				
LTSHn	<u>Length of nth Text Subheader.</u> This field shall contain a valid length in bytes of the data field of the n th Text Subheader, where n is the number of the TS, counting from the first TS (n = 001) in the order of the TSs' appearance in the NSIF File. Possible values for n are: 001 to 999. This field shall occur as many times as specified by the value of the NUMT field. This field is conditional and shall be omitted if the NUMT field contains BCS Zeros (code 0x30). Note: The largest Text Subheader is limited to 9998 (10 ⁴ -2) bytes. A value of 9999 in this field indicates that the actual Text Subheader length was not available when the NSIF File Header was created (paragraph 10a).	4	BCS-N positive integer 0282 to 9998, 9999	C
LTn	<u>Length of nth Text Segment.</u> This field shall contain a valid length in bytes of the n th TS, where n is the number of the TS, counting from the first TS (n = 001) in the order of the TSs' appearance in the NSIF File. Possible values for n are: 001 to 999. This field shall occur as many times as specified by the value of the NUMT field. This field is conditional and shall be omitted if the NUMT field contains BCS Zeros (code 0x30). Note: The largest TS is limited to 9998 (10 ⁵ -2) bytes. A value of 99999 in this field indicates that the actual TS length was not available when the NSIF File Header was created (paragraph 10a).	5	BCS-N positive integer 00001 to 99998, 99999	C
. End for each Text Segment LTSHn, LTn; the number of loop repetitions is the value specified in the NUMT field.				
NUMDES	<u>Number of Data Extension Segments.</u> This field shall contain the number of separate DES included in the NSIF File. The value of this field shall be BCS Zeros (code 0x30) if no DES are included in the NSIF File.	3	BCS-N positive integer 000 to 999 (Default is BCS Zeros (0x30))	R
. Start for each Data Extension Segment LDSHn, LDn.				
NOTE: LDSHn and LDn fields repeat in pairs as follows LDSH001, LD001; LDSH002, LD002; LDSHn, LDn (if the value of the NUMDES field is not equal to zero).				
LDSHn	<u>Length of nth Data Extension Segment Subheader.</u> This field shall contain a valid length in bytes for the n th DES Subheader, where n is the number of the DES, counting from the first DES (n = 001) in order of the DES's appearance in the NSIF File. Possible values for n are: 001 to 999. This field shall occur as many times as specified by the value of the NUMDES field. This field is conditional and shall be omitted if the NUMDES field contains BCS Zeros (code 0x30). Note: The largest DES Subheader is limited to 9998 (10 ⁴ -2) bytes. A value of 9999 in this field indicates that the actual DES Subheader length was not available when the NSIF File Header was created (paragraph 10a).	4	BCS-N positive integer 0200 to 9998, 9999	C

Table C-1-1. NSIF File Header (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
LDn	<u>Length of nth Data Extension Segment</u> . This field shall contain a valid length in bytes of the data field in the n th DES, where n is the number of the DES, counting from the first DES (n = 001) in order of the DES's appearance in the NSIF File. Possible values for n are: 001 to 999. This field shall occur as many times as are specified by the value of the NUMDES field. This field is conditional and shall be omitted if the NUMDES fields contains BCS Zeros (code 0x30). Note: The largest DES is limited to 999999998 (10 ⁹ - 2) bytes. A value of 999999999 in this field indicates that the actual DES length was not available when the NSIF File Header was created (paragraph 10a)	9	BCS-N positive integer 00000001 to 999999998, 999999999	C
. . . . End for each Data Extension Segment LDSHn, LDn; the number of loop repetitions is the value specified in the NUMDES field.				
NUMRES	<u>Number of Reserved Extension Segments</u> . This field shall contain the number of separate RES included in the NSIF File. The value of this field shall be BCS Zeros (code 0x30) if no RES are included in the NSIF File.	3	BCS-N positive integer 000 to 999 (Default is BCS Zeros (0x30))	R
. . . . Start for each Reserved Extension Segment LRESHn, LREn.				
NOTE: LRESHn and LREn fields repeat in pairs as follows LRESH001, LRE001; LRESH002, LRE002; LRESHn, LREn (if the value of the NUMRES field is not equal to zero).				
LRESHn	<u>Length of nth Reserved Extension Segment Subheader</u> . This field shall contain a valid length in bytes for the n th RES Subheader, where n is the number of the RES, counting from the first RES (n = 001) in order for the RES's appearance in the NSIF File. Possible values for n are: 001 to 999. This field shall occur as many times as are specified by the value of the NUMRES field. This field is conditional and shall be omitted if the NUMRES field contains BCS Zeros (code 0x30).	4	BCS-N positive integer 0200 to 9999	C
LREn	<u>Length of nth Reserved Extension Segment</u> . This field shall contain a valid length in bytes for the data field in the n th RES, where n is the number of the RES, counting from the first RES (n = 001) in order of the RES's appearance in the NSIF File. Possible values for n are: 001 to 999. This field shall occur as many times as are specified by the value of the NUMRES field. This field is conditional and shall be omitted if the NUMRES field contains BCS Zeros (code 0x30).	7	BCS-N positive integer 0000001 to 9999999	C
. . . . End for each Reserved Extension Segment LRESHn, LREn; the number of loop repetitions is the value specified in the NUMRES field.				
UDHDL	<u>User-Defined Header Data Length</u> . A value of BCS Zeros (code 0x30) shall denote that no TRE are included in the UDHD field. If a TRE exists, the field shall contain the sum of the length (size) of all the TRE (paragraph 27a) appearing in the UDHD field plus 3 (size of the UDHOFL field). If a TRE is too long to fit in the UDHD field or the XHD field, it shall be put in the TRE overflow DES with DESID set to the value TRE_OVERFLOW (paragraph 27c(1)).	5	BCS-N positive integer 00000 or 00003 to 99999 (Default is BCS Zeros (0x30))	R

Table C-1-1. NSIF File Header (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
UDHOFL	<u>User-Defined Header Overflow</u> . This field shall contain BCS Zeros (code 0x30) if the TRE in the UDHD field do not overflow into a DES, or shall contain the sequence number of the DES into which they do overflow. This field shall be omitted if the UDHDL field contains BCS Zeros (code 0x30).	3	BCS-N positive integer 000 to 999 (Default is BCS Zeros (0x30))	C
UDHD	<u>User-Defined Header Data</u> . If present, this field shall contain user-defined TRE data (paragraph 27a). The length of this field shall be the value contained by the UDHDL field minus 3. TRE shall appear one after the other with no intervening bytes. The first byte of this field shall be the first byte of the first TRE appearing in the field. The last byte of this field shall be the last byte of the last TRE to appear in the field. This field shall be omitted if the UDHDL field contains BCS Zeros (code 0x30).	† ¹	User-defined	C
XHDL	<u>Extended Header Data Length</u> . A value of BCS Zeros (code 0x30) shall denote that no TRE are included in the XHD field. If a TRE exists, the field shall contain the sum of the length (size) of all the TRE (paragraph 27) appearing in the XHD field plus 3 (size of the XHDLOFL field). If a TRE is too long to fit in the XHD field or the UDHD field, it shall be put in the TRE Overflow DES with DESID set to the value TRE_OVERFLOW (paragraph 27).	5	BCS-N positive integer 00000 or 00003 to 99999 (Default is BCS Zeros (0x30))	R
XHDLOFL	<u>Extended Header Data Overflow</u> . This field shall contain BCS Zeros (code 0x30) if the TRE in the XHD field do not overflow into a DES, or shall contain the sequence number of the DES into which they do overflow. This field shall be omitted if the XHDL field contains BCS Zeros (code 0x30).	3	BCS-N positive integer 000 to 999 (Default is BCS Zeros (0x30))	C
XHD	<u>Extended Header Data</u> . If present, this field shall contain TRE (paragraph 27) approved and under configuration management of the Custodian. The length of this field shall be the value contained by the XHDL field minus 3. TRE shall appear one after the other with no intervening bytes. The first byte of this field shall be the first byte of the first TRE appearing in the field. The last byte of this field shall be the last byte of the last TRE to appear in the field. This field shall be omitted if the XHDL field contains BCS Zeros (code 0x30).	†† ¹	TRE	C

†¹ A value as specified in the UDHDL field minus 3 (in bytes)††¹ A value as specified in the XHDL field minus 3 (in bytes)

Table C-1-2. Display Dependent Parameters

IREP	IREPBANDn	NBANDS	PVTYPE	NLUTSn
NODISPLY	BCS Spaces (0x20)	1 to 9, 0 ^{†2}	INT, R, C, B, SI	0
MONO	LU, M, or BCS Spaces (0x20)	1	INT, R,B	0, 1, 2
RGB	R,G,B	3	INT, R	0
RGB/LUT	LU	1	INT, B	3
YCbCr601	Y,Cb,Cr	3	INT	0
NVECTOR	BCS Spaces (0x20)	1 to 9, 0 ^{†2}	INT, R,C	0
POLAR	BCS Spaces (0x20), M	2	INT, R,C	0
VPH	BCS Spaces (0x20)	2	INT, R,C	0
MULTI	BCS Spaces (0x20), M, R, G, B, LU	2 to 9, 0 ^{†2}	INT, R,C,B	0, 1, 2, 3

^{†2} If NBANDS field contains 0 then XBANDS field is required where XBANDS > 9

Table C-1-2(A). Category Dependent Parameters

ICAT	ISUBCATn	NBANDS	PVTYPE	NBPP	ABPP			
VIS, OP	User Defined (defaulted to BCS Spaces (0x20))	1, 3	B	1	1			
				INT	8	2 to 8		
					12	8 to 12		
					16	9 to 16		
					32	17 to 32		
			R	64	33 to 64			
				32	32			
				64	64			
SL, TI, FL, RD, EO, HR, BP, FP, VD, CAT, MRI, XRAY	User Defined (defaulted to BCS Spaces (0x20))	1	INT	8	2 to 8			
				R	12	8 to 12		
					16	9 to 16		
					32	17 to 32		
					64	33 to 64		
			R	32	32			
				64	64			
IR	BCS Spaces (0x20), wave-length (in nanometres)	1	INT	8	2 to 8			
				R	12	8 to 12		
					16	9 to 16		
					32	17 to 32		
					64	33 to 64		
			R	32	32			
				64	64			
CP, PAT	User Defined (defaulted to BCS Spaces (0x20))	3	INT	8	2 to 8			
				32	17 to 32			
				64	33 to 64			
MAP, LEG	User Defined (defaulted to BCS Spaces (0x20))	1, 3	INT	8	2 to 8			
				32	17 to 32			
				64	33 to 64			
LOCG	BCS Spaces (0x20), CGX, CGY, GGX, or GGY	1 to 9, 2	INT	8	2 to 8			
				SI	12	8 to 12		
					16	9 to 16		
					32	17 to 32		
					64	33 to 64		
			R	8	2 to 8			
				12	8 to 12			
				16	9 to 16			
				32	17 to 32			
				64	33 to 64			
			MATR	FACC codes from DIGEST Part 4, Annex B	1 to 9, 0† ^{2(A)}	C	64	64
							INT	8
						12		8 to 12
						16		9 to 16
						32		17 to 32
SI	64	33 to 64						
	8	2 to 8						
	12	8 to 12						
	16	9 to 16						
	32	17 to 32						
	64	33 to 64						
R	32	32						
	64	64						

Table C-1-2(A). Category Dependent Parameters (continued)

ICAT	ISUBCATn	NBANDS	PVTYPE	NBPP	ABPP	
MS, HS	wave-length in nanometres	2 to 9, 0 ^{†2(A)}	INT	8	2 to 8	
				12	8 to 12	
				16	9 to 16	
				32	17 to 32	
				64	33 to 64	
			R	32	32	
			R	64	64	
SAR, SARIQ	I, Q, M, P, or BCS Spaces (0x20)	1, 2	C	64	64	
				INT	8	2 to 8
					12	8 to 12
					16	9 to 16
					32	17 to 32
			64		33 to 64	
R	32	32				
			R	64	64	
WIND, CURRENT	SPEED, DIRECT	2	INT	8	2 to 8	
BARO, DEPTH	Units from DIGEST Part 3 to 7	1	INT	8	2 to 8	
				12	8 to 12	
				16	9 to 16	
DTEM	Units from DIGEST Part 3 to 7	1	INT	8	2 to 8	
				12	8 to 12	
				16	9 to 16	
				32	17 to 32	
				64	33 to 64	
			SI	8	2 to 8	
				12	8 to 12	
				16	9 to 16	
				32	17 to 32	
				64	33 to 64	
			R	32	32	
				64	64	

^{†2(A)} If NBANDS field contains 0 then XBANDS field is required where XBANDS > 9

Table C-1-3. NSIF Image Subheader
TYPE R = Required, C = Conditional, <> = BCS Spaces (code 0x20) are allowed for the entire field
(† annotations are explained at the end of the table)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
IM	<u>File Part Type</u> . This field shall contain the characters IM to identify the Subheader as an Image Subheader.	2	BCS-A IM	R
IID1	<u>Image Identifier 1</u> . This field shall contain a valid alphanumeric identification code associated with the image. The valid codes are determined by the application.	10	BCS-A User-defined	R
IDATIM	<u>Image Date and Time</u> . This field shall contain the time (UTC) (Zulu) of the image acquisition the format CCYYMMDDhhmmss, where CC is the century (00 to 99), YY is the last two digits of the year (00 to 99), MM is the month (01 to 12), DD is the day (00 to 31), hh is the hour (00 to 23), mm is the minute (00 to 59), ss is the second (00 to 59). UTC (Zulu) is assumed to be the time zone designator to express the time of day.	14	BCS-N positive integer CCYYMMDDhhmmss	R
TGTID	<u>Target Identifier</u> . This field shall contain the identification of the primary target in the image, formatted as BBBBBOOOOCC, consisting of ten characters of Basic Encyclopaedia (BE), followed by five characters of facility OSUFFIX, followed by the two character country code as specified in FIPS PUB 10-4.	17	BCS-A BBBBBBBBBOOO OCC (Default is BCS Spaces (0x20))	<R>
IID2	<u>Image Identifier 2</u> . This field shall contain the title of the image.	80	BCS-A (Default is BCS Spaces (0x20))	<R>
ISCLAS	<u>Image Security Classification</u> . This field shall contain a valid value representing the classification level of the Segment. Valid values are T for Top Secret, S for Secret, C for Confidential, R for Restricted, U for Unclassified.	1	BCS-A T, S, C, R, or U	R
NOTE: If the value of the ISCLAS field is T, S, C, or R, then the ISCLSY field must be populated with a valid code for the security classification system used.				
ISCLSY	<u>Image Security Classification System</u> . This field shall contain valid values indicating the national or multinational security system used to classify the Segment. Country Codes per FIPS PUB 10-4 are used to indicate national security systems. If this field is all BCS Spaces (code 0x20), it shall imply that no Security Classification System applies to the Segment.	2	BCS-A BE, CA, DA, FR, GM, GR, IC, IT, LU, NL, NO, PO, SP, TU, UK, US NS represents NATO Security System. Additional codes shall be registered with the Custodian. (Default is BCS Spaces (0x20))	<R>
NOTE: If any of the following fields are populated with anything other than spaces, then the ISCLSY field must be populated with a valid code for the security classification system used: ISCODE, ISREL, ISDCTP, ISDCDT, ISDCXM, ISDG, ISDGD, ISCLTX, ISCATP, ISCAUT, ISCRSN, ISSRDT, and ISCTLN.				
ISCODE	<u>Image Codewords</u> . This field shall contain a valid indicator of the security compartments associated with the Segment. Values include one or more of the digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). Multiple entries shall be separated by a single BCS Space (code 0x20). The selection of a relevant set of Codewords is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no Codewords apply to the Segment.	11	BCS-A (Default is BCS Spaces (0x20))	<R>

Table C-1-3. NSIF Image Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
ISCTLH	<u>Image Control and Handling</u> . This field shall contain valid additional security Control and/or Handling instructions (caveats) associated with the Segment. Values include digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). The digraph may indicate single or multiple caveats. The selection of a relevant caveat(s) is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no additional Control and Handling instructions apply to the Segment.	2	BCS-A (Default is BCS Spaces (0x20))	<R>
ISREL	<u>Image Releasing Instructions</u> . This field shall contain a valid list of countries outside of NATO to which the Segment is authorised for release. Typical values include one or more country codes as found in FIPS PUB 10-4 separated by a single BCS Space (code 0x20). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Releasing instructions apply to the Segment.	20	BCS-A (Default is BCS Spaces (0x20))	<R>
ISDCTP	<u>Image Declassification Type</u> . This field shall contain a valid indicator of the type of security Declassification or Downgrading instructions which apply to the Segment. Valid values are DD for declassify on a specific date, DE for declassify upon occurrence of an event, GD downgrade to a specified level on a specific date, GE for downgrade to a specified level upon occurrence of an event, O for OADR, and X for exempt from automatic declassification. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment security Declassification or Downgrading instructions apply.	2	BCS-A DD, DE, GD, GE, O, X (Default is BCS Spaces (0x20))	<R>
ISDCDT	<u>Image Declassification Date</u> . This field shall indicate the date on which a Segment is to be declassified if the value of the ISDCTP field is DD. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Declassification date applies.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>
ISDCXM	<u>Image Declassification Exemption</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the reason the Segment is exempt from automatic declassification if the value of the ISDCTP field is X. Valid values are X1 to X8 and X251 to X259. X1 to X8 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-202b(1) to (8) for material exempt from the 10-year rule. X251 to X259 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-301a(1) to (9) for permanently valuable material exempt from the 25-year declassification system. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Declassification Exemption does not apply.	4	BCS-A X1 to X8, X251 to X259 (Default is BCS Spaces (0x20))	<R>
ISDG	<u>Image Downgrade</u> . This field shall indicate the classification level to which a Segment is to be downgraded if the values of the ISDCTP is GD or GE. Valid values are S for Secret, C for Confidential, R for Restricted. If this field contains a BCS Space (code 0x20), it shall imply that Segment security Downgrading does not apply.	1	BCS-A S, C, R (Default is BCS Space (0x20))	<R>

Table C-1-3. NSIF Image Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
ISDGD	<u>Image Downgrade Date</u> . This field shall indicate the date on which a Segment is to be downgraded if the value of the ISDCTP field is GD. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment security Downgrading date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>
ISCLTX	<u>Image Classification Text</u> . This field shall be used to provide additional information about Segment classification to include identification of a declassification or downgrading event if the value of the ISDCTP field is DE or GE. It may also be used to identify multiple classification sources and/or any other special handling rules. Values are user-defined free text. If this field is all BCS Spaces (code 0x20), it shall imply that additional information about Segment classification does not apply.	43	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
ISCATP	<u>Image Classification Authority Type</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the type of authority used to classify the Segment. Valid values are O for original Classification Authority, D for derivative from a single source, and M for derivative from multiple sources. If this field contains a BCS Space (code 0x20), it shall imply that a Segment Classification Authority does not apply.	1	BCS-A O, D, M (Default is BCS Space (0x20))	<R>
ISCAUT	<u>Image Classification Authority</u> . This field is not for general use but may be employed by some national systems. This field shall identify the Classification Authority for the Segment dependent upon the value of the ISCATP field. Values are user-defined free text which should contain the following information: original Classification Authority name and position or personal ID if the value of the ISCATP field is O; title of the document or security classification guide used to classify the Segment if the value of the ISCATP field is D; and Derive-Multiple if the Segment classification was derived from multiple sources and the value of the ISCATP field is M. In the latter case, the Segment originator will maintain a record of the sources used in accordance with existing security directives. One of the multiple sources may also be identified by the ISCLTX field if desired. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Classification Authority does not apply.	40	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
ISCRSN	<u>Image Classification Reason</u> . This field is not for general use but may be employed by some national systems. This field shall contain values indicating the reason for classifying the Segment. Valid values are A to G. These correspond to the reasons for original classification per E.O. 12958, Section 1.5.(a) to (g). If this field contains a BCS Space (code 0x20), it shall imply that no Segment Classification Reason applies.	1	BCS-A A to G (Default is BCS Space (0x20))	<R>

Table C-1-3. NSIF Image Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
ISSRDT	<u>Image Security Source Date</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the date of the source used to derive the classification of the Segment. In the case of multiple sources, the date of the most recent source shall be used. If this field is all BCS Spaces (code 0x20), it shall a Segment Security Source date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>
ISCTLN	<u>Image Security Control Number</u> . This field is not for general use but may be employed by some national systems. This field shall contain a valid Security Control Number associated with the Segment. The format of the Security Control Number shall be in accordance with the regulations governing the appropriate security channel(s). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Security Control Number applies.	15	BCS-A (Default is BCS Spaces (0x20))	<R>
ENCRYP	<u>Encryption</u> . This field shall contain the value BCS Zero (code 0x30) until such time as this specification is updated to define the use of other values.	1	BCS-N positive integer 0 implies not encrypted (Default is BCS Zero (0x30))	R
ISORCE	<u>Image Source</u> . This field shall contain a description of the Source of the image. If the Source of the data is classified, then the description shall be preceded by the classification, including Codeword(s) contained in Table C-1-4 and C-1-4(A). If the value of this field is all BCS Spaces (code 0x20), it shall imply that no Image Source data applies.	42	BCS-A (Default is BCS Spaces (0x20))	<R>
NROWS	<u>Number of Significant Rows in Image</u> . This field shall contain the total number of rows of significant pixels in the image. When the product of the values of the NPPBV field and the NBPC field is greater than the value of the NROWS field ($NPPBV * NBPC > NROWS$), the rows indexed with the value of the NROWS field to $(NPPBV * NBPC)$ minus 1 shall contain fill data. NOTE: Only the rows indexed 0 to the value of NROWS field minus 1 of the image contain significant data. The pixel fill values are determined by the application.	8	BCS-N positive integer 00000002 to 99999999	R
NCOLS	<u>Number of Significant Columns in Image</u> . This field shall contain the total number of columns of significant pixels in the image. When the product of the values of the NPPBH field and the NBPR field is greater than the value of the NCOLS field ($NPPBH * NBPR > NCOLS$), the columns indexed with the value of the NCOLS field to $(NPPBH * NBPR)$ minus 1 shall contain fill data. NOTE: Only the columns indexed 0 to the value of NCOLS field minus 1 of the image contain significant data. The pixel fill values are determined by the application.	8	BCS-N positive integer 00000002 to 99999999	R

Table C-1-3. NSIF Image Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
PVTYPE	<u>Pixel Value Type</u> . This field shall contain an indicator of the type of computer representation used for the value for each pixel for each band in the image. Valid entries are INT for integer, B for bi-level, SI for 2's complement signed integer, R for real, and C for complex. The data bits of INT and SI values shall appear in the NSIF File in order of significance, beginning with the MSB and ending with the LSB. INT and SI data types shall be limited to 8, 12, 16, 32, or 64 bits. R values shall be represented according to IEEE 32 or 64-bit floating point representation (IEEE 754). C values shall be represented with the real and imaginary parts, each represented in IEEE 32 or 64-bit floating point representation (IEEE 754) and appearing in adjacent four or eight-byte blocks, first real, then imaginary. B (bi-level) pixel values shall be represented as single bits with binary value 1 or 0.	3	BCS-A INT, B, SI, R, C	R
IREP	<u>Image Representation</u> . This field shall contain a valid indicator of the processing required in order to display an image. Valid representation indicators are MONO for monochrome, RGB for red, green, or blue true colour, RGB/LUT for mapped colour, MULTI for multiband imagery, NODISPLY for an image not intended for display, NVECTOR and POLAR for vectors with Cartesian and polar coordinates respectively, and VPH for SAR video phase history. In addition, compressed imagery can have this field set to YCbCr601 when compressed in the ITU-R Recommendation BT.601-5 colour space using JPEG (if the value of the IC field is equal to C3). This field should be used in conjunction with the IREPBANDn field to interpret the processing required to display each band of the image.	8	BCS-A MONO, RGB, RGB/LUT, MULTI, NODISPLY, NVECTOR, POLAR, VPH, YCbCr601 (Table C-1-2)	R
ICAT	<u>Image Category</u> . This field shall contain a valid indicator of the specific category of image, raster, or grid data. The specific category of an IS reveals its intended use or the nature of its collector. Valid categories include VIS for visible imagery, SL for side-looking radar, TI for thermal infrared, FL for forward looking infrared, RD for radar, EO for electro-optical, OP for optical, HR for high resolution radar, HS for hyperspectral, CP for colour frame photography, BP for black/white frame photography, SAR for synthetic aperture radar, SARIQ for SAR radio hologram, IR for infrared, MS for multispectral, FP for fingerprints, MRI for magnetic resonance imagery, XRAY for x-rays, CAT for CAT scans, VD for video, BARO for barometric pressure, CURRENT for water current, DEPTH for water depth, and WIND for air wind charts. Valid categories for geographic products or geo-reference support data are MAP for raster maps, PAT for colour patch, LEG for legends, DTEM for elevation models, MATR for other types of matrix data, and LOCG for location grids. This field should be used in conjunction with the ISUBCATn, field to interpret the significance of each band of the image.	8	BCS-A VIS, SL, TI, FL, RD, EO, OP, HR, HS, CP, BP, SAR, SARIQ, IR, MAP, MS, FP, MRI, XRAY, CAT, VD, PAT, LEG, DTEM, MATR, LOCG, BARO, CURRENT, DEPTH, WIND (Default is VIS) (Table C-1-2(A))	R

Table C-1-3. NSIF Image Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
ABPP	<u>Actual Bits-per-Pixel per Band</u> . This field shall contain the number of significant bits for the value in each band of each pixel without compression. Even when the image is compressed, the ABPP field contains the number of significant bits per pixel that were present in the image before compression. This field shall be less than or equal to the NBPP field. The number of adjacent bits within the NBPP field is used to represent the value. These representation bits shall be left justified or right justified within the bits of the NBPP field, according to the value in the PJUST field. For example, if 11-bit pixels are stored in 16 bits, this field shall contain 11 and the NBPP field shall contain 16. The default number of significant bits to be used is the value contained in the NBPP field.	2	BCS-N positive integer 01 to 96	R
PJUST	<u>Pixel Justification</u> . When the value of the ABPP field is not equal to the value of the NBPP field, this field indicates whether the significant bits are left justified (L) or right justified (R). Non-significant bits in each pixel shall contain the binary value 0.	1	BCS-A L or R (Default is R)	R
ICORDS	<u>Image Coordinate Representation</u> . This field shall contain a valid code indicating the type of coordinate representation used for providing an approximate location of the image in the IGEOLO field. The valid values for this field are: U for UTM expressed in Military Grid Reference System (MGRS) form, N for UTM/UPS (Northern hemisphere), S for UTM/UPS (Southern hemisphere), G for Geographic and D for Decimal Degrees. (Choice between N and S is based on hemisphere of northernmost point.) The default Geodetic reference system is WGS84. If no coordinate system is identified, a BCS Space (code 0x20) shall be used.	1	BCS-A U, G, N, S, D, or BCS Space (0x20)	<R>
IGEOLO	<u>Image Geographic Location</u> . This field shall contain an approximate geographic location which is not intended for analytical purposes (e.g., targeting, mensuration, distance calculation); it is intended to support general user appreciation for the image location (e.g., cataloging). The representation of the image corner locations is specified in the ICORDS field. The locations of the four corners of the (significant) image data shall be given in image coordinate order: (0,0), (0,MaxCol), (MaxRow), (MaxCol), (MaxRow,0). MaxCol and MaxRow shall be determined from the values contained, respectively, in the NCOLS field and the NROWS field. MaxCol is equal to the value contained in the NCOLS field minus 1 (MaxCol = NCOLS -1). Valid corner locations in geographic coordinates shall be expressed as latitude and longitude. The format ddmmsXdddmmssY represents latitude and longitude. The first half, ddmmsX, represents degrees, minutes, and seconds of latitude with X representing North or South (N for North, or S for South). The second half, dddmmssY, represents degrees, minutes, and seconds of longitude with Y representing East or West (E for East, W for West), respectively. Coordinates shall only be populated in the IGEOLO field to the known	60	BCS-A ±dd.ddd±ddd.ddd (four times) or ddmmssXdddmmssY (four times) or zzBJKeeeennnnn (four times) or zeeeeennnnnnn (four times)	C

Table C-1-3. NSIF Image Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
IGEOL0 (continued)	<p>precision of the corner coordinates. Non-significant digits of the field shall be replaced with BCS Spaces (0x20). An example of the 60 character field with two spaces depicting the absence of arc seconds is: ddmm Xdddmm Yddmm Xdddmm Yddmm Xdddmm Y. </p> <p>Decimal degrees are expressed as ±dd.ddd±ddd.ddd (four times) where ±dd.ddd equals latitude (+ represents the northern hemisphere, - represents the southern hemisphere) and ±ddd.ddd equals longitude (+ represents the eastern hemisphere, - represents the western hemisphere). Non-significant digits of the field shall be replaced with BCS Spaces (0x20).</p> <p>For the UTM Coordinate Representation, coordinates shall be expressed either in plain UTM coordinates or by using MGRS. In either case, UTM coordinates should be in terms of the same zone, to ensure a unified image on the grid. Normally UTM/MGRS coordinates should be rounded to the nearest 10 metres to match the precision of the geographic coordinates.</p> <p>Plain UTM and UPS coordinates use the format zzzzzzznnnnnnn where zz represents the UTM/UPS zone number (zz equals to 61 for UPS), and eeeee, nnnnnn represents Easting and Northing. Hemisphere (N or S) for UTM/UPS is expressed in the ICORDS field (Figure C-3-1).</p> <p>UTM expressed in MGRS use the format zzBJKeeeeennnnn where zzBJK represents the zone, band and 100 km square within the zone and eeeee, nnnnn represents residuals of Easting and Northing.</p> <p>NOTE: Provide the value only to the decimal places (precision) warranted by the sources and methods used to determine the location. The remaining places will be BCS Spaces (code 0x20). There is no implied accuracy associated with the data in this field. Additional information associated with precise georeferencing (e.g., accuracy, datums, etc.) are provided in NSIF geospatial related extensions, if present in the file.</p>			
NICOM	<u>Number of Image Comments.</u> This field shall contain the valid number of ICOMn field(s) that follow to be used as free text image comments.	1	BCS-N positive integer 0 to 9	R
. Start for each Image Comment ICOMn (if the value of the NICOM field is not equal to zero).				
ICOMn	<u>Image Comment n.</u> The field (ICOM1 to ICOMn), when present, shall contain free-form BCS text. They are intended for use as a single comment block and should be used that way. This field shall contain the n th free text Image Comment, where n is defined as follows: 1≤n≤ the value of the NICOM field. If the Image Comment is classified, it shall be preceded by the classification, including Codeword(s). This field shall be omitted if the value of the NICOM field is BCS Zero (code 0x30).	80	BCS-A User-defined	C
. End for each ICOMn field; the number of loop repetitions is the value specified in the NICOMn field.				

Table C-1-3. NSIF Image Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
IC	<p><u>Image Compression</u>. This field shall contain a valid code indicating the form of compression used in representing the image data. Valid values for this field are, C1 to represent bi-level, C3 to represent JPEG, C4 to represent Vector Quantization, C5 to represent lossless JPEG, I1 to represent downsampled JPEG and NC to represent the image is not compressed. Also valid are M1, M3, M4, and M5 for compressed images, and NM for uncompressed images indicating an image that contains a Block Mask and/or a Pad Pixel Mask. C8 and M8 are values that represent ISO standard compression JPEG 2000. C6 and M6 are reserved values that will represent a future correlated multicomponent compression algorithm. C7 and M7 are reserved values that will represent a future complex SAR compression. The format of a mask image is identical to the format of its corresponding non-masked image except for the presence of an Image Data Mask at the beginning of the image data area. The format of the Image Data Mask is described in paragraph 18b and is shown in Table C-1-3(A). The definitions of the compression schemes associated with codes C1/M1, C3/M3, C4/M4, C5/M5, and I1 are given, respectively, in ITU-T T.4 AMD2, MIL-STD-188-198A profile of ISO/IEC 10918-1, ISO/IEC DIS 10918-3, ISO/IEC IS 12087-5, and NIMA N0106-98. C1 is found in ITU-T T.4 AMD2, C3 is found in MIL-STD-188-198A profile of ISO/IEC IS 10918-1 and ISO/IEC IS 10918-3, C4 is found in ISO/IEC IS 12087-5, and C5 and I1 are found in NIMA N0106-98. C8/M8 are defined in ISO/IEC IS 15444-1. (NOTE: C2 (ARIDPCM) is not valid in NSIF.)</p>	2	BCS-A NC, NM, C1, C3, C4, C5, C6, C7, C8, I1, M1, M3, M4, M5, M6, M7, M8	R
COMRAT	<p><u>Compression Rate Code</u>. If the IC field contains, C1, C3, C4, C5, M1, M3, M4, M5, or I1 this field shall be present and contain a code indicating the compression rate for the image.</p> <p>If the value of the IC field is C1 or M1, the valid codes are 1D, 2DS, and 2DH, where:</p> <ul style="list-style-type: none"> 1D implies One-dimensional Coding 2DS implies Two-dimensional Coding Standard Vertical Resolution (K=2) 2DH implies Two-dimensional Coding High Vertical Resolution (K=4) <p>Explanation of these codes can be found in ITU-T T.4 AMD2.</p> <p>If the value of the IC field is C3, M3, C5, M5 or I1, the value of the field shall identify the embedded quantization table(s) used by the JPEG compression algorithm. In this case, the format of this field is XX.Y where XX is the image data type, and Y represents the quality level 1 to 5. The image data types are represented by:</p> <ul style="list-style-type: none"> 00 represents General Purpose 01 represents VIS 02 represents IR 03 represents SAR 04 represents Downsample (DS) JPEG <p>Explanation of the optimized tables can be found in MIL-STD-188-198A, which is a profile of ISO/IEC 10918-1, defined in accordance with AC 224(AG/4)D-67, and NIMA N0106-97. The value of Y shall be 0 if customized tables are used. It is optional, but highly recommended, that the value of XX still be used for the image type with customized tables.</p> <p>If the value of IC is C5 or M5, then the value of Y shall be 0. It is optional but highly recommended that the value of XX still be used for the image type.</p> <p>If the value of the IC field is C4 or M4, this field shall contain a value given in the form n.nn representing the number of bits-per-pixel for the compressed image. Explanation of the compression rate for Vector Quantization can be found in ISO/IEC IS 12087-5.</p> <p>This field is omitted if the value of the IC field is NC or NM.</p>	4	BCS-A Depending on the value of the IC field. (The description contains the constraints.)	C

Table C-1-3. NSIF Image Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
NBANDS	<u>Number of Bands</u> . This field shall contain the number of data bands within the specified image. This field and the IREP field are interrelated and they are independent of the IMODE field. The corresponding values for the IREP and NBANDS fields are: NODISPLY, 0 to 9; MONO, 1; RGB, 3; RGB/LUT, 1; YCbCr601, 3; NVECTOR, 0 to 9; POLAR, 2; VPH, 2; MULTI, 0, 2 to 9; and BCS Zero (code 0x30) for multiple band images or matrices with greater than 9 bands.	1	BCS-N positive integer 0 to 9 BCS Zero (0x30) (The description contains details.)	R
XBANDS	<u>Number of Multispectral Bands</u> . When the NBANDS field contains the value BCS Zero (code 0x30), this field shall contain the number of bands or data points comprising the multiband image. Otherwise this field shall be omitted if the value of the NBANDS field is 1 to 9.	5	BCS-N positive integer 00010 to 99999	C
..... Start for each IREP BANDn to LUT Dnm fields.				
NOTE: The IREP BANDn to LUT Dnm fields repeat the number of times indicated in the NBANDS field or the XBANDS field.				
IREP BANDn	<u>nth Band Representation</u> . This field shall contain a valid indicator of the processing required to display the n th band of the image with regard to the general image type as recorded in the IREP field. The significance of each band in the image can be derived from the combination of the ICAT, and ISUBCATn fields. Valid values of the IREP BANDn field depend on the value of the IREP field. The following standard values shall apply: <ul style="list-style-type: none"> • R, G, B respectively for a Red, Green, Blue representation of the band, • LU for a LUT representation of the band (e.g., a three table LUT for RGB and a single table LUT for shades of grey), • M for a monochrome representation of the band, BCS Spaces (code 0x20) for a band not designated for display, but may be displayed if desired, • Y, Cb, Cr respectively for the Luminance, Chrominance (blue), and Chrominance (red) representation of a YCbCr601 (compressed case only) image, The only valid values when IREP contains MULTI are M, R, G, B, and LU: <ul style="list-style-type: none"> • It is strongly recommended that 3 of the multiple bands have the IREP BANDn fields populated with R, G, and B. • When bands marked as LU, R, G, B, and M are present, the RGB designated bands are the default bands for display. If R, G, B are not present, the default displayable band is the LU band. If R, G, B, or LU are not present, the default displayable band is the first M band. When no bands are marked with LU, R, G, B, or M the first three bands may be displayed as R, G, and B respectively. For consistency, multispectral images cannot have more than one band, each marked as R, G, and B. • IREP BANDn shall be filled with the M value, if the band is to be represented as monochrome. • IREP BANDn shall be filled with the LU value, if the 	2	BCS-A, (Default is BCS Spaces (0x20)) Standard values are: LU, R, G, B, M, Y, Cb, Cr. Additional values are allowed through the registration process.	R

Table C-1-3. NSIF Image Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
IREPBAND n (continued)	<p>band is to be represented using a LUT.</p> <ul style="list-style-type: none"> When IREP BANDn is filled with BCS Spaces (code 0x20), no specific representation is defined for the band, but it may be displayed if desired. <p>Additional values are reserved for specific interpretations and shall be coordinated with the Custodian to regulate their use.</p> <p>The only valid values when IREP contains MONO images are M, LU or BCS Spaces (code 0x20).</p> <p>The only valid values when IREP contains RGB images are R, G and B.</p> <p>The only valid value when IREP contains RGB/LUT images is LU.</p> <p>The only valid values when IREP contains YCbCr601 images are Y, Cb and Cr.</p> <p>Note: There may be more than one band that contains M or LU where the default conditions are such that the first M or LU band is the band to be displayed. This is only the default display to be presented to the user. Any other band or combination of bands may be displayed by user intervention.</p>			
ISUBCATn	<p><u>nth Band Subcategory</u>. The purpose of this field is to provide the significance of the nth bands of the image with regard to the specific category (ICAT field) of the overall image. The use of this field is user-defined except for the following:</p> <p>For MultiSpectral imagery (ICAT contains MS), HyperSpectral imagery (ICAT contains HS), and Infrared imagery (ICAT contains IR), ISUBCATn contains the wavelength in nanometres.</p> <p>When ICAT contains SAR or SARIQ, ISUBCATn contains:</p> <ul style="list-style-type: none"> I for the inphase band, Q for the quadrature components band, M for the magnitude band, P for the phase components, BCS Spaces for all the other cases. <p>When ICAT contains WIND or CURRENT, ISUBCATn contains SPEED for wind or water speed , or DIRECT for wind or water direction.</p> <p>For location grids, the number of bands is strictly equal to 2, consequently, there are only 2 fields, the ISUBCAT1 field and the ISUBCAT2 field. Standard values of these fields of location grids are either CGX and CGY for the cartographic X (Easting) and Y (Northing) bands, or GGX and GGY with the geographic X representing the longitude band and Y representing the latitude band.</p> <p>Standard values for the matrix (ICAT contains MATR) are FACC codes from DIGEST Part 4 – Annex B.</p> <p>Standard values for Digital Terrain Elevation Models (ICAT contains DTEM) are units of length from DIGEST, Part 3 to 7.</p>	6	<p>BCS-A I, Q, M, P, SPEED, DIRECT, User-defined When ICAT contains MS, HS, or IR the value range is the wave length. When ICAT contains LOCG the value range is CGX, CGY (Cartographic), GGX, GGY (Geographic). (Default is BCS Spaces (0x20))</p>	<R>

Table C-1-3. NSIF Image Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
IFCn	<u>nth Band Image Filter Condition</u> . This field shall contain the value N (to represent none). Other values are reserved for future use.	1	BCS-A N	R
IMFLTn	<u>nth Band Standard Image Filter Code</u> . This field is reserved for future use. It shall be filled with BCS Spaces (code 0x20).	3	BCS-A (Fill with BCS Spaces (0x20))	<R>
NLUTSn	<u>Number of LUTs for the nth Image Band</u> . This field shall contain the number of LUTs associated with the n th band of the image. LUTs are allowed only if the value of the PVTYPEn field is INT or B. If the n th band of the image is monochromatic, this field can contain the value 1 or 2. If the value is 2, the first and second LUTs shall map respectively the most significant byte and the least significant byte of the 16 bit values. NOTE : If a system cannot support more than 256 different values it may use only the values of the first LUT. In this case, the number of entries in the LUT (NELUTn) may exceed 256. If the n th band of the image is colour-coded (the value of the IREP BANDn field is LU) this field shall contain the value 3. The first, second, and third LUTs, in this case, shall map the image to the red, green, and blue display bands respectively. The value 4 is reserved for future use.	1	BCS-N positive integer 0 to 4 (Default is BCS Zero (0x30) if no LUTs are included.)	R
NELUTn	<u>Number of LUT Entries for the nth Image Band</u> . This field shall contain the number of entries in each of the LUTs for the n th image band. This field shall be omitted if the value of the NLUTSn contains BCS Zero (code 0x30).	5	BCS-N positive integer 00001 to 65536	C
. Start for each LUT LUTDnm.				
LUTDnm	<u>nth Image Band, mth LUT</u> . This field shall be omitted if the Number of LUTs (NLUTSn) is BCS Zero (code 0x30). Otherwise, this field shall contain the data defining the m th LUT for the n th image band. Each entry in the LUT is composed of one byte, ordered from MSB to LSB, representing a binary value from zero (0x00) to 255 (0xFF). To use the LUT, for each integer k, $0 \leq k \leq$ (value of the NELUTn field) - 1, the pixel value k in the n th image band shall be mapped to the value of the k th byte of this field (the LUT). NOTE: This is a repeating field based on the value of the NLUTSn field. When there are more than one LUT (value of the NLUTSn field is greater than 1), the net effect is to have the LUT ordered in band sequential fashion, e.g., all the red values followed by the green values followed by the blue values.	† ³	Unsigned binary integer LUT Values	C
. End for each LUTDnm field; the number of loop repetitions is the value specified in the NLUTSn field.				
. End for each IREP BANDn to LUTDnm fields; the number of loop repetitions is the value specified in the NBANDS field or the XBANDS field.				
ISYNC	<u>Image Sync Code</u> . This field is reserved for future use. This field shall contain BCS Zero (code 0x30)	1	BCS-N positive integer 0 = No Sync Code	R

Table C-1-3. NSIF Image Subheader (continued)

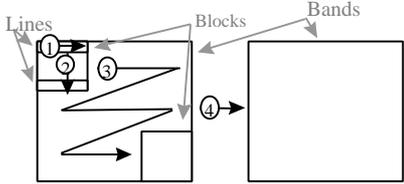
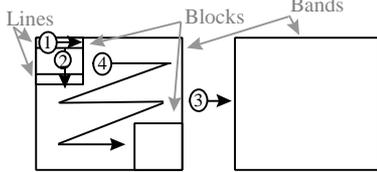
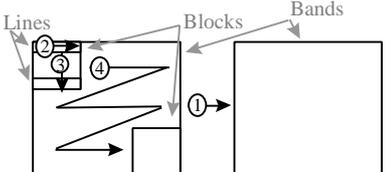
FIELD	NAME	SIZE	VALUE RANGE	TYPE
IMODE	<p>Image Mode. This field shall indicate how the Image Pixels are stored in the NSIF File. Valid values are B, P, R, and S. The interpretation of IMODE is dependent on whether the image is JPEG compressed (value of the IC field is C3, C5, I1, M3, or M5), VQ compressed (value of the IC field is C4 or M4), or uncompressed (value of the IC field is NC or NM).</p> <p>a. Uncompressed. The value S indicates band sequential, where all blocks for the first band are followed by all blocks for the second band, and so on: [(block1, band1), (block2, band1), ... (blockM, band1)], [(block1, band2), (block2, band 2), ... (blockM, band2)] ... [(block1, bandN), (block2, bandN), ... (blockM, bandN)]. Note that, in each block, the pixels of the first line appears first, followed by the pixels of the second line, and so on.</p>  <p style="text-align: center;">Band Sequential (IMODE = S)</p> <p>The value B indicates band interleaved by block. This implies that within each block, the bands follow one another: [(block1, band1), (block1, band2), ... (block1, bandN)], [(block2, band1), (block2, band2), ... (block2, bandN)], ... [(blockM, band1), (blockM, band2), ... (blockM, bandN)]. Note that, in each block, the pixels of the first line appears first and the pixels of the last line appears last.</p>  <p style="text-align: center;">Band Interleaved by block (IMODE = B)</p> <p>The value P indicates band interleaved by pixel within each block: such as, for each block, one after the other, the full pixel vector (all band values) appears for every pixel in the block, one pixel after another, the block column index varying faster than the block row index.</p>  <p style="text-align: center;">Band Interleaved by pixel (IMODE = P)</p> <p>The value R indicates band interleaved by row. The ordering mechanism for this case stores the pixel</p>	1	<p>BCS-A</p> <p>B represents Band Interleaved by Block.</p> <p>P represents Band Interleaved by Pixel.</p> <p>R represents Band Interleaved by Row.</p> <p>S represents Band Sequential.</p>	R

Table C-1-3. NSIF Image Subheader (continued)

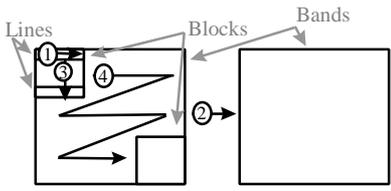
FIELD	NAME	SIZE	VALUE RANGE	TYPE
<p>IMODE (continued)</p>	<p>values of each band in row sequential order. Within each block, all pixel values of the first row of the first band are followed by pixel values of the first row of the second band continuing until all values of the first row are stored. The remaining rows are stored in a similar fashion until the last row of values has been stored. Each block shall be zero filled to the next octet boundary when necessary.</p>  <p style="text-align: center;">Band Interleaved by row (IMODE = R)</p> <p>If the value of the NBANDS field is 1, the cases B and S coincide. In this case, this field shall contain B. If the Number of Blocks is 1 (the NBPR field and the NBPC field contain 1), this field shall contain B for non-interleaved by pixel, and P for interleaved by pixel. The value S is only valid for images with multiple blocks and multiple bands.</p> <p>b. <u>JPEG Compressed</u>. The presence of B, P, or S implies specific ordering of data within the JPEG image data representation. For this case the interpretation of the various values of the IMODE field is specified in the MIL-STD-188-198A profile of ISO/IEC 10918-1 and ISO/IEC DIS 10918-3. When IC contains II; IMODE contains B.</p> <p>c. <u>VQ Compressed</u>. VQ compressed images are normally either RGB with a colour LUT or monochromatic. In either case, the image is single band, and the IMODE field defaults to B.</p> <p>d. <u>Bi-Level Compressed</u>. When the value of the IC field is C1 or M1, the value of the IMODE field is B.</p>			
NBPR	<p><u>Number of Blocks Per Row</u>. This field shall contain the number of image blocks in a row of blocks (paragraph 17b) in the horizontal direction. If the image consists of only a single block, this field shall contain the value one.</p>	4	BCS-N positive integer 0001 to 9999	R
NBPC	<p><u>Number of Blocks Per Column</u>. This field shall contain the number of image blocks in a column of blocks (paragraph 17b) in the vertical direction. If the image consists of only a single block, this field shall contain the value one.</p>	4	BCS-N positive integer 0001 to 9999	R
NPPBH	<p><u>Number of Pixels Per Block Horizontal</u>. This field shall contain the number of pixels horizontally in each block of the image. It shall be the case that the product of the values of the NBPR field and the NPPBH field is greater than or equal to the value of the NCOLS field (NBPR * NPPBH ≥ NCOLS).</p>	4	BCS-N positive integer 0001 to 8192	R

Table C-1-3. NSIF Image Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
NPPBV	<u>Number of Pixels Per Block Vertical</u> . This field shall contain the number of pixels vertically in each block of the image. It shall be the case that the product of the values of the NBPC field and the NPPBV field is greater than or equal to the value of the NROWS field ($NBPC * NPPBV \geq NROWS$).	4	BCS-N positive integer 0001 to 8192	R
NBPP	<u>Number of Bits Per Pixel Per Band</u> . If the IC field contains NC, NM, C4, or M4, this field shall contain the number of storage bits used for the value from each component of a pixel vector. The value in this field shall always be greater than or equal to the value of the Actual Bits Per Pixel (ABPP) Field. For example, if 11-bit pixels are stored in 16 bits, this field shall contain 16 and the ABPP field shall contain 11. If the value of the IC field is C3, M3, C5, M5, or I1, this field shall contain the value 8 or the value 12. If the value of the IC field is C1, this field shall contain the value 1.	2	BCS-N positive integer 01 to 96	R
IDLVL	<u>Image Display Level</u> . This field shall contain a valid value that indicates the DLVL of the image relative to other displayed Segments in a composite display. The valid values are 001 to 999. The DLVL of each displayable Segment (image or graphic) within a NSIF File shall be unique; that is, each number from 001 to 999 is the DLVL of, at most, one Segment. DLVL is fully discussed in paragraph 14. The IS or GS in the NSIF File having the minimum DLVL shall have the ALVL000 (BCS Zeros (code 0x30)).	3	BCS-N positive integer 001 to 999	R
IALVL	<u>Image Attachment Level</u> . This field shall contain a valid value that indicates the ALVL of the image. Valid values for this field are BCS Zeros (code 0x30), and the DLVL value of any other image or graphic in the NSIF File. ALVL is fully discussed in paragraph 15. The IS or GS in the NSIF File having the minimum DLVL shall have ALVL000 (BCS Zeros (code 0x30)).	3	BCS-N positive integer 000 to 998 (Default is BCS Zeros (0x30))	R
ILOC	<u>Image Location</u> . The Image Location is specified by specifying the location of the first pixel of the first line of the image. This field shall contain the Image Location offset from the ILOC or SLOC value of the Segment to which the image is attached or from the origin of the CCS when the image is unattached (IALVL contains 000). A row or column value of 0 indicates no offset. Positive row and column values indicate offsets down and to the right, while negative row and column values indicate offsets up and to the left.	10	BCS-N integer RRRRRCCCCC For positive row and column values RRRRR and CCCCC are both in the range 00000 to 99999. For negative row and column values RRRRR and CCCCC are both in the range -0001 to -9999.	R

Table C-1-3. NSIF Image Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
IMAG	<u>Image Magnification</u> . This field shall contain the magnification (or reduction) factor of the image relative to the original source image. Decimal values are used to indicate magnification, and decimal fraction values indicate reduction. For example, 2.30 indicates the original image has been magnified by a factor of 2.30 while 0.5 indicates the original image has been reduced by a factor of 2. The default value is 1.0 followed by a BCS Space (code 0x20) indicating no magnification or reduction. In addition, the following values shall be used for reductions that are reciprocals of non-negative powers of 2: /2 (for 1/2), /4 (for 1/4), /8 (for 1/8), /16 (for 1/16), /32 (for 1/32), /64 (for 1/64), /128 (for 1/128). The values are left justified and BCS Spaces (code 0x20) filled to the right.	4	BCS-A decimal value, /2 followed by 2 Spaces, /4 followed by 2 Spaces, /8 followed by 2 Spaces, /16 followed by a Space, /32 followed by a Space, /64 followed by a Space, or /128 (Default is 1.0 followed by a BCS Space (0x20))	R
UDIDL	<u>User-Defined Image Data Length</u> . A value of BCS Zeros (code 0x30) shall denote that no TRE are included in the UDID field. If a TRE exists, the field shall contain the sum of the length of all the TRE (paragraph 27a) appearing in the UDID field plus 3 bytes (size of UDOFL field). If a TRE is too long to fit in the UDID field or the IXSHD field, it shall be put in the TRE Overflow DES with DESID set to the value TRE_OVERFLOW (paragraph 27c(1)).	5	BCS-N positive integer 00000 or 00003 to 99999	R
UDOFL	<u>User-Defined Overflow</u> . If present, this field shall contain BCS Zeros (code 0x30) if the TRE in the UDID field do not overflow into a DES, or shall contain the sequence number of the DES into which they do overflow. This field shall be omitted if the field UDIDL contains BCS Zeros (code 0x30).	3	BCS-N positive integer 000 to 999	C
UDID	<u>User-Defined Image Data</u> . If present, this field shall contain user-defined TRE (paragraph 27a). The length of this field shall be the length specified by the value of the UDIDL field minus 3. TRE in this field for an image shall contain information pertaining specifically to the image. TRE shall appear one after the other with no intervening bytes. The first byte of this field shall be the first byte of the first TRE appearing in the field. The last byte of this field shall be the last byte of the last TRE to appear in the field. This field shall be omitted if the field UDIDL contains BCS Zeros (code 0x30).	†† ³	TRE	C
IXSHDL	<u>Image Extended Subheader Data Length</u> . A value of BCS Zeros (code 0x30) shall denote that no TRE are included in the IXSHD field. If a TRE exists, the field shall contain the sum of the length of all the TRE (paragraph 27a) appearing in the IXSHD field plus 3 (size of IXSOFL field) in bytes. If a TRE is too long to fit in the IXSHD field or the UDID field, it shall be put in the TRE Overflow DES with DESID set to the value TRE_OVERFLOW (paragraph 27c(1)).	5	BCS-N positive integer 00000 or 00003 to 99999	R

Table C-1-3. NSIF Image Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
IXSOFL	<u>Image Extended Subheader Overflow</u> . If present, this field shall contain BCS Zeros (code 0x30) if the TRE in the IXSHD field do not overflow into a DES, or shall contain the sequence number of the DES into which they do overflow. This field shall be omitted if the IXSHDL field contains BCS Zeros (code 0x30).	3	BCS-N positive integer 000 to 999	C
IXSHD	<u>Image Extended Subheader Data</u> . If present, this field shall contain TRE (paragraph 27a) approved and under configuration management by the Custodian. The length of this field shall be the value specified by the IXSHDL field minus 3. TRE in this field for an image shall contain information pertaining specifically to the image. TRE shall appear one after the other in this field with no intervening bytes. The first byte of this field shall be the first byte of the first TRE appearing in the field. The last byte of this field shall be the last byte of the last TRE to appear in the field. This field shall be omitted if the IXSHDL field contains BCS Zeros (code 0x30).	††† ³	TRE	C

†³ A value as specified in the NELUTn field (in bytes)

††³ A value as specified in the UDIDL field minus 3 (in bytes)

†††³ A value as specified in the IXSHDL field minus 3 (in bytes)

Table C-1-3(A). NSIF Image Data Mask Table

TYPE R = Required, C = Conditional, <> = BCS Spaces (code 0x20) are allowed for the entire field
(† annotations are explained at the end of the table)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
IMDATOFF	<u>Blocked Image Data Offset</u> . This field is included if the value of the IC field is NM, M1, M3, M4, M5, M6, M7, or M8. It identifies the offset from the beginning of the Image Data Mask to the first byte of the blocked image data. This offset, when used in combination with the offsets provided in the BMRnBND fields, can provide random access to any recorded image block in any image band.	4	Unsigned binary integer; range of values: 0 to 2^{32} -1	C
BMRLNTH	<u>Block Mask Record Length</u> . This field is included if the value of the IC field is NM, M1, M3, M4, M5, M6, M7, or M8. It identifies the length of each Block Mask Record in bytes. When present, the length of each Block Mask Record is 4 bytes. The total length of all the Block Mask Records is equal to: For IMODE=B, P, and R: $BMRLNTH \times NBPR \times NBPC$ For IMODE=S: $BMRLNTH * NBPR * NBPC * NBANDS$ (one 4 byte record for each block of each band in the image). If all of the image blocks are recorded, this value may be set to 0x0000, and the conditional BMRnBNDm fields are not recorded/transmitted. Otherwise, the value may be set to 0x0004, and the conditional BMRnBNDm fields are recorded/transmitted and can be used as an offset index for each image block in each band of the image. If this field is present, but coded as 0x0000, then only a Pad Pixel Mask is included.	2	Unsigned binary integer; 0x0000 represents no Block Mask Record; 0x0004 represents Block Mask Records (4 bytes each) are present	C
TMRLNTH	<u>Pad Pixel Mask Record Length</u> . This field is included if the value of the IC field is NM, M1, M3, M4, M5, M6, M7, or M8. It identifies the length of each Pad Pixel Mask Record in bytes. When present, the length of each Pad Pixel Mask Record is 4 bytes. The total length of the Pad Pixel Mask Records equals: For IMODE=B, P, and R: $TMRLNTH \times NBPR \times NBPC$ For IMODE=S: $TMRLNTH * NBPR * NBPC * NBANDS$ (one 4 byte record for each block for each band in the image). If none of the image blocks contain Pad Pixels, this value is set to 0x0000, and the conditional TMRnBNDm fields are not recorded/transmitted. If the value of the IC field is M3, the value shall be set to 0x0000. If this field is present, but coded as 0x0000, then a Block Mask is included.	2	Unsigned binary integer; 0x0000 represents no Pad Pixel Mask Records; 0x0004 represents Pad Pixel Mask Records (4 bytes each) are present	C
TPXCDLNTH	<u>Pad Output Pixel Code Length</u> . This field is included if the value of the IC field is NM, M1, M3, M4, M5, M6, M7, or M8. It identifies the length in bits of each component of the Pad Output Pixel Code. If coded as 0x0000, no Pad Pixels are present, and the TPXCD field is not recorded. If the value of the IC field is M3, the value shall be set to zeros (0x0000).	2	Binary unsigned; 0x0000 represents no Pad Pixels; or Pad Pixel Code length in bits (Length must be as specified in NBPP)	C

Table C-1-3(A). NSIF Image Data Mask Table (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
TPXCD	<u>Pad Output Pixel Code</u> . This field is included if the value of the IC field is NM, M1, M3, M4, or M5 and the value of the TPXCDLNTH is not zeros (0x0000). It contains the Output Pixel Code that represents a Pad Pixel in the image. This value is unique within the image, and allows the user to identify Pad Pixels. The Pad Pixel Output Code length is determined by the value of the TPXCDLNTH field. If the number of bits used by the TPXCD field is less than the number of bits available for storage, the value shall be justified in accordance the value contained by the PJUST field in the Image Subheader (L for left, R for right justified).	^{†3A}	Unsigned binary integer; range of values: 0 to 2 ⁿ -1 where n is the value contained by the TPXCDLNTH field	C
. Start for each BMRnBNDm and TMRnBNDm record.				
NOTE: The BMRnBNDm record repeats; one 4 byte record for each block of each band in the image.				
BMRnBNDm	<u>Block n, Band m Offset</u> . This field shall contain the n th Block Mask Record of band m. It is recorded/transmitted only if the BMRLNTH field does not contain zeros (0x0000). The field shall contain an offset in bytes from the beginning of the blocked image data to the first byte of block n of band m. If block n of the image data of band m is not recorded/transmitted, the offset value is defaulted to 0xFFFFFFFF. If the value of the IMODE field is S, the offsets for all blocks in band 1 are recorded followed by block offsets for band 2, etc. (band sequential). The number of BMR for each band is NBPR * NBPC.	4	Unsigned binary integer Increment n prior to m 0 ≤ n ≤ NBPR * NBPC - 1 0 ≤ m ≤ max(value NBANDS field, value XBANDS field) (Default is 0xFFFFFFFF if the block is not recorded)	C
.				
NOTE: The TMRnBNDm record repeats; one 4 byte record for each block of each band in the image. This results in a table containing an offset value (or 0xFFFFFFFF) for each block of each band of the image.				
TMRnBNDm	<u>Pad Pixel n, Band m</u> . This field shall contain the n th Pad Pixel for band m. It is recorded/transmitted only if the TMRLNTH field does not contain zeros (0x0000). The field shall contain an offset in bytes from the beginning of the blocked image data to the first byte of block n of the image data of band m if block n contains Pad Pixels, or the default value 0xFFFFFFFF to indicate that this block does not contain Pad Pixels. If the value of the IMODE field is S, the offsets for all blocks in band 1 are recorded followed by block offsets for band 2, etc. (band sequential). The number of TMR for each band is NBPR * NBPC.	4	Unsigned binary integer Increment n prior to m 0 ≤ n ≤ NBPR * NBPC -1 0 ≤ m ≤ max(NBANDS, XBANDS) (Default is 0xFFFFFFFF if the block does not contain Pad Pixels)	C

^{†3A} The length (size) of the TPXCD field is the next highest number of bytes that can contain the number of bits identified in the TPXCDLNTH field. For example, a TPXCDLNTH value of 12 (bits) would be stored in a TPXCD field with the size of 2 (bytes).

Table C-1-4. Valid NATO Security Control Markings

CODEWORD	DIGRAPH
NATO	NS
TOP SECRET	T
SECRET	S
CONFIDENTIAL	C
UNCLASSIFIED	U
ATOMAL	AL
COSMIC	CS

Note: Additional codes shall be registered with the Custodian. The digraphs shown in this table are exemplary of those used at the time of publication. These codes are subject to change. Consult current security directives when implementing.

Table C-1-4(A). Valid File/Segment Security Control Markings

CODEWORD	DIGRAPH
CNWDI	CN
COPYRIGHT	PX
CRYPTO	CR
EFTO	TX
FORMREST DATA	RD
FOUO	FO
GENSER	GS
LIM OFF USE (UNCLAS)	LU
LIMDIS	DS
NOCONTRACT	NC
NONCOMPARTMENT	NT
ORCON	OR
PERSONAL DATA	IN
PROPIN	PI
RESTRICTED DATA	RD
SAO	SA
SAO-1	SL
SAO-2	HA
SAO-3	HB
SAO-SI-2	SK
SAO-SI-3	HC
SAO-SI-4	HD
SIOP	SH
SIOP/ESI	SE
SPECIAL CONTROL	SC
SPECIAL INTEL	SI
US ONLY	UO
WARNING NOTICE - SECURITY CLASSIFICATION IS BASED ON THE FACT OF EXISTENCE AND AVAIL OF THIS GRAPHIC	WN
WNINTEL	WI

Note: The digraphs shown in this table are exemplary of those used at the time of publication. These codes are subject to change. Consult current security directives when implementing.

Table C-1-5. NSIF Graphic Subheader

TYPE R = Required, C = Conditional, <> = BCS Spaces (code 0x20) are allowed for the entire field
(† annotations are explained at the end of the table)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
SY	<u>File Part Type</u> . This field shall contain the characters SY to identify the Subheader as a Graphic Subheader.	2	BCS-A SY	R
SID	<u>Graphic Identifier</u> . This field shall contain a valid alphanumeric identification code associated with the graphic. The valid codes are determined by the application.	10	BCS-A User-defined	R
SNAME	<u>Graphic Name</u> . This field shall contain an alphanumeric name for the graphic.	20	BCS-A (Default is BCS Spaces (0x20))	<R>
SSCLAS	<u>Graphic Security Classification</u> . This field shall contain a valid value representing the classification level of the Segment. Valid values are T for Top Secret, S for Secret, C for Confidential, R for Restricted, U for Unclassified.	1	BCS-A T, S, C, R, or U	R
NOTE: If the value of the SSCLAS field is T, S, C, or R, then the SSCLSY field must be populated with a valid code for the security classification system used.				
SSCLSY	<u>Graphic Security Classification System</u> . This field shall contain valid values indicating the national or multinational security system used to classify the Segment. Country Codes per FIPS PUB 10-4 are used to indicate national security systems. If this field is all BCS Spaces (code 0x20), it shall imply that no Security Classification System applies to the Segment.	2	BCS-A BE, CA, DA, FR, GM, GR, IC, IT, LU, NL, NO, PO, SP, TU, UK, US NS represents NATO Security System. Additional codes shall be registered with the Custodian. (Default is BCS Spaces (0x20))	<R>
NOTE: If any of the following fields are populated with anything other than spaces, then the SSCLSY field must be populated with a valid code for the security classification system used: SSCODE, SSREL, SSDCTP, SSDCDT, SSDCXM, SSDG, SSDGDT, SSCLTX, SSCATP, SSCAUT, SSCRSN, SSSRDT, and SSCTLN.				
SSCODE	<u>Graphic Codewords</u> . This field shall contain a valid indicator of the security compartments associated with the Segment. Values include one or more of the digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). Multiple entries shall be separated by a single BCS Space (code 0x20). The selection of a relevant set of Codewords is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no Codewords apply to the Segment.	11	BCS-A (Default is BCS Spaces (0x20))	<R>
SSCTLH	<u>Graphic Control and Handling</u> . This field shall contain valid additional security Control and/or Handling instructions (caveats) associated with the Segment. Values include digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). The digraph may indicate single or multiple caveats. The selection of a relevant caveat(s) is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no additional Control and Handling instructions apply to the Segment.	2	BCS-A (Default is BCS Spaces (0x20))	<R>

Table C-1-5. NSIF Graphic Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
SSREL	<u>Graphic Releasing Instructions</u> . This field shall contain a valid list of country and/or multilateral entity codes to which countries and/or multilateral entities the Segment is authorised for release. Typical values include one or more country codes as found in FIPS PUB 10-4 separated by a single BCS Space (code 0x20). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Release instructions apply.	20	BCS-A (Default is BCS Spaces (0x20))	<R>
SSDCTP	<u>Graphic Declassification Type</u> . This field shall contain a valid indicator of the type of security Declassification or Downgrading instructions which apply to the Segment. Valid values are DD for declassify on a specific date, DE for declassify upon occurrence of an event, GD for downgrade to a specified level on a specific date, GE for downgrade to a specified level upon occurrence of an event, O for OADR, and X for exempt from automatic declassification. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment security Declassification or Downgrading instructions apply.	2	BCS-A DD, DE, GD, GE, O, X (Default is BCS Spaces (0x20))	<R>
SSDCDT	<u>Graphic Declassification Date</u> . This field shall indicate the date on which a Segment is to be declassified if the value of the SSDCTP field is DD. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Declassification date applies.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>
SSDCXM	<u>Graphic Declassification Exemption</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the reason the Segment is exempt from automatic declassification if the value of the SSDCTP field is X. Valid values are X1 to X8 and X251 to X259. X1 to X8 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-202b(1) to (8) for material exempt from the 10-year rule. X251 to X259 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-301a(1) to (9) for permanently valuable material exempt from the 25-year declassification system. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Declassification Exemption does not apply.	4	BCS-A X1 to X8 X251 to X259 (Default is BCS Spaces (0x20))	<R>
SSDG	<u>Graphic Downgrade</u> . This field shall indicate the classification level to which a Segment is to be downgraded if the value of the SSDCTP field is GD or GE. Valid values are S for Secret, C for Confidential, and R for Restricted. If this field is all BCS Spaces (code 0x20), it shall imply that Segment security Downgrading does not apply.	1	BCS-A S, C, R (Default is BCS Spaces (0x20))	<R>
SSDGDT	<u>Graphic Downgrade Date</u> . This field shall indicate the date on which a Segment is to be downgraded if the value of the SSDCTP field is GD. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment security Downgrading date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>

Table C-1-5. NSIF Graphic Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
SSCLTX	<u>Graphic Classification Text</u> . This field shall be used to provide additional information about Segment classification to include identification of a Declassification or Downgrading event if the value of the SSDCTP field is DE or GE. It may also be used to identify multiple classification sources and/or any other special handling rules. Values are user-defined free text. If this field is all BCS Spaces (code 0x20), it shall imply that additional information about Segment classification does not apply.	43	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
SSCATP	<u>Graphic Classification Authority Type</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the type of authority used to classify the Segment. Valid values are O for original Classification Authority, D for derivative from a single source, and M for derivative from multiple sources. If this field contains a BCS Space (code 0x20), it shall imply that a Segment Classification Authority does not apply.	1	BCS-A O, D, M (Default is BCS Spaces (0x20))	<R>
SSCAUT	<u>Graphic Classification Authority</u> . This field is not for general use but may be employed by some national systems. This field shall identify the Classification Authority for the Segment dependent upon the value of the SSCATP field. Values are user-defined free text which should contain the following information: original Classification Authority name and position or personal ID if the value of the SSCATP field is O; title of the document or security classification guide used to classify the Segment if the value of the SSCATP field is D; and Derive-Multiple if the Segment classification was derived from multiple sources and the value of the SSCATP field is M. In the latter case, the Segment originator will maintain a record of the sources used in accordance with existing security directives. One of the multiple sources may also be identified by the SSCLTX field if desired. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Classification Authority applies.	40	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
SSCRSN	<u>Graphic Classification Reason</u> . This field is not for general use but may be employed by some national systems. This field shall contain values indicating the reason for classifying the Segment. Valid values are A to G. These correspond to the reasons for original classification per E.O. 12958, Section 1.5.(a) to (g). If this field contains a BCS Space (code 0x20), it shall imply that no Segment Classification Reason applies.	1	BCS-A A to G (Default is BCS Space (0x20))	<R>
SSSRDT	<u>Graphic Security Source Date</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the date of the source used to derive the classification of the Segment. In the case of multiple sources, the date of the most recent source shall be used. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Security Source date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>

Table C-1-5. NSIF Graphic Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
SSCTLN	<u>Graphic Security Control Number</u> . This field is not for general use but may be employed by some national systems. This field shall contain a valid Security Control Number associated with the Segment. The format of the Security Control Number shall be in accordance with the regulations governing the appropriate security channel(s). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Security Control Number applies.	15	BCS-A (Default is BCS Spaces (0x20))	<R>
ENCRYP	<u>Encryption</u> . This field shall contain the value BCS Zero (code 0x30) until such time as this specification is updated to define the use of other values.	1	BCS-N positive integer 0 implies not encrypted (Default is BCS Zero (0x30))	R
SFMT	<u>Graphic Type</u> . This field shall contain a valid indicator of the representation type of the graphic. The valid value is C, which represents Computer Graphics Metafile (CGM). The graphic data contain a CGM in binary format that defines the graphic according to the specification of the profile of CGM for NSIF in ISO/IEC 8632-1. Future versions of the NSIF may include additional CGM profiles.	1	BCS-A C for CGM	R
SSTRUCT	<u>Reserved for Future Use</u> . Reserved.	13	BCS-N positive integer 0000000000000 to 9999999999999 (Default is BCS Zeros (0x30))	R
SDLVL	<u>Graphic Display Level</u> . This field shall contain a valid value that indicates the graphic Display Level of the graphic relative to other displayed Segments in a composite display. The valid values are 001 to 999. The Display Level of each displayable Segment (image or graphic) within a NSIF File shall be unique; that is, each number from 001 to 999 is the Display Level of, at most, one Segment. Display Level is discussed fully in paragraph 14. The GS or IS in the NSIF File having the minimum DLVL shall have ALVL000 (BCS Zeros (code 0x30)).	3	BCS-N positive integer 001 to 999	R
SALVL	<u>Graphic Attachment Level</u> . This field shall contain a valid value that indicates the Attachment Level of the graphic. Valid values for this field are BCS Zeros (code 0x30) or the DLVL value of any other image or graphic in the NSIF File. ALVL is discussed fully in paragraph 15. The GS or IS in the NSIF File having the minimum DLVL shall have ALVL000 (BCS Zeros (code 0x30)).	3	BCS-N positive integer 000 to 998 (Default is BCS Zeros (0x30))	R

Table C-1-5. NSIF Graphic Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
SLOC	<u>Graphic Location</u> . The graphic location is specified by providing the location of the graphic's origin point relative to the position (location) of the CCS, image, or graphic to which it is attached. This field shall contain the graphic location offset from the ILOC or SLOC value of the CCS, image, or graphic to which the graphic is attached or from the origin of the CCS when the graphic is unattached (SALVL000). A row or column value of 00000 indicates no offset. Positive row and column values indicate offsets down and to the right, while negative row and column values indicate offsets up and to the left.	10	BCS-N integer RRRRRCCCC For positive row and column values RRRRR and CCCCC are both in the range 00000 to 99999. For negative row and column values RRRRR and CCCCC are both in the range -0001 to -9999.	R
SBND1	<u>First Graphic Bound Location</u> . This field shall contain an ordered pair of integers defining a location in Cartesian coordinates for use with CGM graphics. It is the upper left corner of the bounding box for the CGM graphic. The format is rrrrrcccc, where rrrrr is the row and ccccc is the column offset from ILOC or SLOC field value of the Segment to which the graphic is attached. If the graphic is unattached (value of the SALVL field is equal to BCS Zeros (code 0x30)), rrrrr and ccccc represent offsets from the origin of the coordinate system that is common to all images and graphics in the NSIF File having the value of BCS Zeros (code 0x30) in the SALVL field. The range for rrrrr and ccccc shall be -9999 to 99999.	10	BCS-N integer rrrrrcccc with -9999≤rrrrr≤99999 -9999≤ccccc≤99999 (Default is BCS Zeros (0x30))	R
SCOLOR	<u>Graphic Colour</u> . The value of this field depends on the value of the SFMT field. The only value allowed for a CGM graphic (SFMT field value is C) are: <ul style="list-style-type: none"> • C if the CGM contains any colour pieces, • M if it is monochrome (i.e., black, white, or levels of grey) 	1	BCS-A C, M	R
SBND2	<u>Second Graphic Bound Location</u> . This field shall contain an ordered pair of integers defining a location in Cartesian coordinates for use with CGM graphics. It is the lower right corner of the bounding box for the CGM graphic. The format is rrrrrcccc, where rrrrr is the row and ccccc is the column offset from ILOC or SLOC field value of the Segment to which the graphic is attached. If the graphic is unattached (SALVL field value is BCS Zeros (code 0x30)), rrrrr and ccccc represent offsets from the origin of the coordinate system that is common to all images and graphics in the NSIF File having the value of BCS Zeros (code 0x30) in the SALVL field. The range for rrrrr and ccccc shall be -9999 to 99999.	10	BCS-N integer rrrrrcccc with -9999≤rrrrr≤99999 -9999≤ccccc≤99999 (Default is BCS Zeros (0x30))	R
SRES2	<u>Reserved for Future Use</u> . This field is reserved for future use. The default value shall be BCS Zeros (code 0x30).	2	BCS-N positive integer 00 to 99 (Default is BCS Zeros (0x30))	R

Table C-1-5. NSIF Graphic Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
SXSHDL	<u>Graphic Extended Subheader Data Length</u> . A value of BCS Zeros (code 0x30) shall denote that no TRE are included in the Graphic Subheader. If a TRE exists, the field shall contain the sum of the length of all the TRE (paragraph 27a) appearing in the SXSHD field plus 3 (SXSOFL field size). If a TRE is too long to fit in the SXSHD field, it shall be put in the TRE Overflow DES with DESID set to the value TRE_OVERFLOW (paragraph 27c(1)).	5	BCS-N positive integer 00000 or 00003 to 09741 (Default is BCS Zeros (0x30))	R
SXSOFL	<u>Graphic Extended Subheader Overflow</u> . If present, this field shall contain BCS Zeros (code 0x30) if the TRE in the SXSHD field do not overflow into a DES or shall contain the sequence number of the DES into which they do overflow. This field shall be omitted if the SXSHDL field contains BCS Zeros (code 0x30).	3	BCS-N positive integer 000 to 999	C
SXSHD	<u>Graphic Extended Subheader Data</u> . If present, this field shall contain TRE (paragraph 27a) approved and under configuration management by the Custodian. The length of this field shall be the value specified by the SXSHDL field minus 3. TRE in this field for a graphic shall contain information pertaining specifically to the graphic. TRE shall appear one after the other in this field with no intervening bytes. The first byte of this field shall be the first byte of the first TRE appearing in the field. The last byte of this field shall be the last byte of the last TRE to appear in the field. This field shall be omitted if the SXSHDL field contains BCS Zeros (code 0x30).	† ⁵	TRE	C

†⁵ A value as specified in the SXSHDL field minus 3 (in bytes)

Table C-1-6. NSIF Text Subheader

TYPE R = Required, C = Conditional, <> = BCS Spaces (code 0x20) are allowed for the entire field
(† annotations are explained at the end of the table)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
TE	<u>File Part Type</u> . This field shall contain the characters TE to identify the Subheader as a Text Subheader.	2	BCS-A TE	R
TEXTID	<u>Text Identifier</u> . This field shall contain a valid alphanumeric identification code associated with the TS. The valid codes are determined by the application.	7	BCS-A User-defined	R
TX TALVL	<u>Text Attachment Level</u> . This field shall contain a valid value that indicates the Attachment Level of the text. Valid values for this field are 000 (BCS Zeros (code 0x30)) or the Display Level value of any image or graphic in the NSIF File.	3	BCS-N positive integer 000 to 998 (Default is BCS Zeros (0x30))	R
TX TDT	<u>Text Date and Time</u> . This field shall contain the time (UTC) (Zulu) of origination of the text in the format CCYYMMDDhhmmss, where CC is the century (00 to 99), YY is the last two digits of the year (00 to 99), MM is the month (01 to 12), DD is the day (01 to 31), hh is the hour (00 to 23), mm is the minute (00 to 59), and ss is the second (00 to 59). UTC (Zulu) is assumed to be the time zone designator to express the time of day.	14	BCS-N positive integer CCYYMMDDhhmmss	R
TX TITL	<u>Text Title</u> . This field shall contain the title of the TS.	80	BCS-A (Default is BCS Spaces (0x20))	<R>
TS CLAS	<u>Text Security Classification</u> . This field shall contain a valid value representing the classification level of the Segment. Valid values are T for Top Secret, S for Secret, C for Confidential, R for Restricted, U for Unclassified.	1	BCS-A T, S, C, R, or U	R
NOTE: If the value of the TSCLAS field is T, S, C, or R, then the TSCLSY field must be populated with a valid code for the security classification system used.				
TS CLSY	<u>Text Security Classification System</u> . This field shall contain valid values indicating the national or multinational security system used to classify the Segment. Country Codes per FIPS PUB 10-4 are used to indicate national security systems. If this field is all BCS Spaces (code 0x20), it shall imply that no Security Classification System applies to the Segment.	2	BCS-A BE, CA, DA, FR, GM, GR, IC, IT, LU, NL, NO, PO, SP, TU, UK, US NS represents NATO Security System. Additional codes shall be registered with the Custodian. (Default is BCS Spaces (0x20))	<R>
NOTE: If any of the following fields are populated with anything other than spaces, then the TSCLSY field must be populated with a valid code for the security classification system used: TSCODE, TSREL, TSDCTP, TSDCDT, TSDCXM, TSDG, TSDGDT, TSCLTS, TSCATP, TSCAUT, TSCRSN, TSSRDT, and TSCTLN.				
TSCODE	<u>Text Codewords</u> . This field shall contain a valid indicator of the security compartments associated with the Segment. Values include one or more of the digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). Multiple entries shall be separated by a single BCS Space (code 0x20). The selection of a relevant set of Codewords is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no Codewords apply to the Segment.	11	BCS-A (Default is BCS Spaces (0x20))	<R>

Table C-1-6. NSIF Text Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
TSCTLH	<u>Text Control and Handling</u> . This field shall contain valid additional security Control and/or Handling instructions (caveats) associated with the Segment. Values include digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). The digraph may indicate single or multiple caveats. The selection of a relevant caveat(s) is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no additional Control and Handling instructions apply to the Segment.	2	BCS-A (Default is BCS Spaces (0x20))	<R>
TSREL	<u>Text Releasing Instructions</u> . This field shall contain a valid list of countries outside of NATO to which the Segment is authorised for release. Typical values include one or more country codes as found in FIPS PUB 10-4 separated by a single BCS Space (code 0x20). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Releasing instructions apply.	20	BCS-A (Default is BCS Spaces (0x20))	<R>
TSDCTP	<u>Text Declassification Type</u> . This field shall contain a valid indicator of the type of security Declassification or Downgrading instructions which apply to the Segment. Valid values are DD for declassify on a specific date, DE for declassify upon occurrence of an event, GD for downgrade to a specified level on a specific date, GE for downgrade to a specified level upon occurrence of an event, O for OADR, and X for exempt from automatic declassification. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment security Declassification or Downgrading instructions apply.	2	BCS-A DD, DE, GD, GE, O, X (Default is BCS Spaces (0x20))	<R>
TSDCDT	<u>Text Declassification Date</u> . This field shall indicate the date on which a Segment is to be declassified if the value of the TSDCTP field is DD. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Declassification date applies.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>
TSDCXM	<u>Text Declassification Exemption</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the reason the Segment is exempt from automatic declassification if the value of the TSDCTP field is X. Valid values are X1 to X8 and X251 to X259. X1 to X8 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-202b(1) to (8) for material exempt from the 10-year rule. X251 to X259 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-301a(1) to (9) for permanently valuable material exempt from the 25-year declassification system. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Declassification Exemption does not apply.	4	BCS-A X1 to X8 X251 to X259 (Default is BCS Spaces (0x20))	<R>

Table C-1-6. NSIF Text Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
TSDG	<u>Text Downgrade</u> . This field shall indicate the classification level to which a Segment is to be downgraded if the value of the TSDCTP field is GD or GE. Valid values are S for Secret, C for Confidential, R for Restricted. If this field contains a BCS Space (code 0x20), it shall imply that Segment security Downgrading does not apply.	1	BCS-A S, C, R (Default is BCS Space (0x20))	<R>
TSDGDT	<u>Text Downgrade Date</u> . This field shall indicate the date on which a Segment is to be downgraded if the value of the TSDCTP field is GD. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment security Downgrading date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>
TSCLTX	<u>Text Classification Text</u> . This field shall be used to provide additional information about Segment classification to include identification of a Declassification or Downgrading event if the value of the TSDCTP field is DE or GE. It may also be used to identify multiple classification sources and/or any other special handling rules. Values are user-defined free text. If this field is all BCS Spaces (code 0x20), it shall imply that additional information about Segment classification does not apply.	43	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
TSCATP	<u>Text Classification Authority Type</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the type of authority used to classify the Segment. Valid values are O for original Classification Authority, D for derivative from a single source, and M for derivative from multiple sources. If this field contains a BCS Space (code 0x20), it shall imply that Segment Classification Authority type does not apply.	1	BCS-A O, D, M (Default is BCS Space (0x20))	<R>
TSCAUT	<u>Text Classification Authority</u> . This field is not for general use but may be employed by some national systems. This field shall identify the Classification Authority for the Segment dependent upon the value of the TSCATP field. Values are user-defined free text which should contain the following information: original Classification Authority name and position or personal ID if the value of the TSCATP field is O; title of the document or security classification guide used to classify the Segment if the value of the TSCATP field is D; and Derive-Multiple if the Segment classification was derived from multiple sources and the value of the TSCATP field is M. In the latter case, the Segment originator will maintain a record of the sources used in accordance with existing security directives. One of the multiple sources may also be identified by the TSCLTX field if desired. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Classification Authority applies.	40	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>

Table C-1-6. NSIF Text Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
TSCRSN	<u>Text Classification Reason</u> . This field is not for general use but may be employed by some national systems. This field shall contain a value indicating the reason for classifying the Segment. Valid values are A to G. These correspond to the reasons for original classification per E.O. 12958, Section 1.5.(a) to (g). If this field contains a BCS Space (code 0x20), it shall imply that no Segment Classification Reason applies.	1	BCS-A A to G (Default is BCS Space (0x20))	<R>
TSSRDT	<u>Text Security Source Date</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the date of the source used to derive the classification of Segment. In the case of multiple sources, the date of the most recent source shall be used. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Security Source date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>
TSCTLN	<u>Text Security Control Number</u> . This field is not for general use but may be employed by some national systems. This field shall contain a valid Security Control Number associated with the Segment. The format of the Security Control Number shall be in accordance with the regulations governing the appropriate security channel(s). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Security Control Number applies.	15	BCS-A (Default is BCS Spaces (0x20))	<R>
ENCRYP	<u>Encryption</u> . This field shall contain the value BCS Zero (code 0x30) until such time as this specification is updated to define the use of other values.	1	BCS-N positive integer 0 implies not encrypted (Default is BCS Zero (0x30))	R
TXTFMT	<u>Text Format</u> . This field shall contain a valid three-character code indicating the format or type of text data. Valid codes are STA to indicate BCS-A, MTF to indicate NATO MTF (refer to STANAG 5500 for examples of the NATO MTF format), and U8S to indicate U8S text formatting. Refer to Annex C, paragraph 25c for additional discussion of standards and the BCS.	3	BCS-A MTF, STA, U8S, UT1	R
TXSHDL	<u>Text Extended Subheader Data Length</u> . A value of BCS Zeros (code 0x30) shall denote that no TRE are included in the Text Subheader. If a TRE exists, the field shall contain the sum of the length of all the TRE (paragraph 27a) appearing in the TSXHD field plus 3 (TSXOFL field size). If a TRE is too long to fit in the TXSHD field, it shall be put in the TRE Overflow DES with DESID set to the value TRE_OVERFLOW (paragraph 27c(1)).	5	BCS-N positive integer 00000 or 00003 to 09717 (Default is BCS Zeros (0x30))	R
TXSOFL	<u>Text Extended Subheader Overflow</u> . If present, this field shall contain BCS Zeros (code 0x30) if the TRE in the TXSHD field do not overflow into a DES, or shall contain the sequence number of the DES into which they do overflow. This field shall be omitted if the TXSHDL field contains BCS Zeros (code 0x30).	3	BCS-N positive integer 000 to 999	C

Table C-1-6. NSIF Text Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
TXSHD	<u>Text Extended Subheader Data</u> . If present, this field shall contain TRE (paragraph 27a) approved and under configuration management by the Custodian. The length of this field shall be the length specified by the value of the TXSHDL field minus 3. TRE in this field shall contain information pertaining specifically to the text. TRE shall appear one after the other in this field with no intervening bytes. The first byte of this field shall be the first byte of the first TRE appearing in the field. The last byte of this field shall be the last byte of the last TRE to appear in the field. This field shall be omitted if the TXSHDL field contains BCS Zeros (code 0x30).	† ⁶	BCS-A	C

†⁶ A value as specified in the TXSHDL field minus 3 (in bytes)

Table C-1-7. Controlled and Registered Tagged Record Extension (TRE) Format
 TYPE R = Required, C = Conditional, <> = BCS Spaces (code 0x20) are allowed for the entire field
 († annotations are explained at the end of the table)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
RETAG or CETAG	<u>Unique Extension Type Identifier</u> . This field shall contain a valid alphanumeric ID that is properly registered with the Custodian.	6	BCS-A	R
REL or CEL	<u>Length of REDATA</u> . This field shall contain the length in bytes of the data contained in REDATA or CEDATA. The Tagged Record's length is 11 plus the size of the REL field or the CEL field.	5	BCS-N positive integer 00001 to 99985	R
REDATA or CEDATA where appropriate	<u>User-Defined Data</u> . This field shall contain data of either binary or character data types defined by and formatted according to user specification. The length of this field shall not cause any other NSIF field length limits to be exceeded, but is otherwise fully user-defined.	† ⁷	User-defined	R

†⁷ A value as indicated in the REL field or the CEL field (in bytes)

Table C-1-8. NSIF Data Extension Segment (DES) Subheader
 TYPE R = Required, C = Conditional, <> = BCS Spaces (code 0x20) are allowed for the entire field
 († annotations are explained at the end of the table)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
DE	<u>Data Extension Subheader</u> . This field shall contain the characters DE to identify the Subheader as a DES Subheader.	2	BCS-A DE	R
DESID	<u>Unique DES Type Identifier</u> . This field shall contain a valid alphanumeric ID that is properly registered with the Custodian.	25	BCS-A (Registered value only)	R
DESVR	<u>Version of the Data Definition</u> . This field shall contain the alphanumeric version number of the use of the Tag. The version number is assigned as part of the registration process.	2	BCS-N positive integer 01 to 99	R
DECLAS	<u>Data Extension File Security Classification</u> . This field shall contain a valid value representing the classification level of the Segment. Valid values are T for Top Secret, S for Secret, C for Confidential, R for Restricted, or U for Unclassified.	1	BCS-A T, S, C, R, or U	R
NOTE: If the value of the DESCLAS field is T, S, C, or R, then the DESCLSY field must be populated with a valid code for the security classification system used.				
DESCLSY	<u>DES Security Classification System</u> . This field shall contain valid values indicating the national or multinational security system used to classify the Segment. Country Codes per FIPS PUB 10-4 are used to indicate national security systems. If this field is all BCS Spaces (code 0x20), it shall imply that no Security Classification System applies to the Segment.	2	BCS-A BE, CA, DA, FR, GM, GR, IC, IT, LU, NL, NO, PO, SP, TU, UK, US NS represents NATO Security System. Additional codes shall be registered with the Custodian. (Default is BCS Spaces (0x20))	<R>
NOTE: If any of the following fields are populated with anything other than spaces, then the DESCLSY field must be populated with a valid code for the security classification system used: DESCODE, DESREL, DESDCTP, DESDCDT, DESDCXM, DESDGM, DESDGDGT, DESCLDES, DESCATP, DESCAUT, DESCRSN, DESSRDT, and DESCTLN.				
DESCODE	<u>DES Codewords</u> . This field shall contain a valid indicator of the security compartments associated with the Segment. Values include one or more of the digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). Multiple entries shall be separated by a single BCS Space (code 0x20). The selection of a relevant set of Codewords is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no Codewords apply to the Segment.	11	BCS-A (Default is BCS Spaces (0x20))	<R>
DESCTLH	<u>DES Control and Handling</u> . This field shall contain valid additional security Control and/or Handling instructions (caveats) associated with the Segment. Values include digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). The digraph may indicate single or multiple caveats. The selection of a relevant caveat(s) is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no additional Control and Handling instructions apply to the Segment.	2	BCS-A (Default is BCS Spaces (0x20))	<R>

Table C-1-8. NSIF Data Extension Segment (DES) Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
DESREL	<u>DES Releasing Instructions</u> . This field shall contain a valid list of countries outside of NATO to which the Segment is authorised for release. Typical values include one or more country codes as found in FIPS PUB 10-4 separated by a single BCS Space (code 0x20). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Releasing instructions apply.	20	BCS-A (Default is BCS Spaces (0x20))	<R>
DESDCTP	<u>DES Declassification Type</u> . This field shall contain a valid indicator of the type of security Declassification or Downgrading instructions which apply to the Segment. Valid values are DD for declassify on a specific date, DE for declassify upon occurrence of an event, GD for downgrade to a specified level on a specific date, GE for downgrade to a specified level upon occurrence of an event, O for OADR, and X for exempt from automatic declassification. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment security Declassification or Downgrading instructions apply.	2	BCS-A DD, DE, GD, GE, O, X (Default is BCS Spaces (0x20))	<R>
DESDCDT	<u>DES Declassification Date</u> . This field shall indicate the date on which a Segment is to be declassified if the value of the DESDCTP field is DD. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Declassification date applies.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>
DESDCXM	<u>DES Declassification Exemption</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the reason the Segment is exempt from automatic declassification if the value of the DESDCTP field is X. Valid values are X1 to X8 and X251 to X259. X1 to X8 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-202b(1) to (8) for material exempt from the 10-year rule. X251 to X259 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-301a(1) to (9) for permanently valuable material exempt from the 25-year declassification system. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Declassification Exemption does not apply.	4	BCS-A X1 to X8 X251 to X259 (Default is BCS Spaces (0x20))	<R>
DESDG	<u>DES Downgrade</u> . This field shall indicate the classification level to which a Segment is to be downgraded if the value of the DESDCTP field is GD or GE. Valid values are S for Secret, C for Confidential, R for Restricted. If this field contains a BCS Space (code 0x20), it shall imply that Segment security Downgrading does not apply.	1	BCS-A S, C, R (Default is BCS Space (0x20))	<R>
DESDGDT	<u>DES Downgrade Date</u> . This field shall indicate the date on which a Segment is to be downgraded if the value of the DESDCTP field is GD. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment security Downgrading date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>

Table C-1-8. NSIF Data Extension Segment (DES) Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
DESCLTX	<u>DES Classification Text</u> . This field shall be used to provide additional information about Segment classification to include identification of a Declassification or Downgrading event if the value of the DESDCTP field is DE or GE. It may also be used to identify multiple classification sources and/or any other special handling rules. Values are user-defined free text. If this field is all BCS Spaces (code 0x20), it shall imply that additional information about Segment classification does not apply.	43	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
DESCATP	<u>DES Classification Authority Type</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the type of authority used to classify the Segment. Valid values are O for original Classification Authority, D for derivative from a single source, and M for derivative from multiple sources. If this field contains a BCS Space (code 0x20), it shall imply that Segment Classification Authority type does not apply.	1	BCS-A O, D, M (Default is BCS Space (0x20))	<R>
DESCAUT	<u>DES Classification Authority</u> . This field is not for general use but may be employed by some national systems. This field shall identify the Classification Authority for the Segment dependent upon the value of the DESCATP field. Values are user-defined free text which should contain the following information: original Classification Authority name and position or personal ID if the of the DESCATP field is O; title of the document or security classification guide used to classify the Segment if the of the DESCATP field is D; and Derive-Multiple if the Segment classification was derived from multiple sources and the value of the DESCATP field is M. In the latter case, the Segment originator will maintain a record of the sources used in accordance with existing security directives. One of the multiple sources may also be identified by the DESCLTX field if desired. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Classification Authority applies.	40	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
DESCRSN	<u>DES Classification Reason</u> . This field is not for general use but may be employed by some national systems. This field shall contain values indicating the reason for classifying the Segment. Valid values are A to G. These correspond to the reasons for original classification per E.O. 12958, Section 1.5.(a) to (g). If this field contains a BCS Spaces (code 0x20), it shall imply that no Segment Classification Reason applies.	1	BCS-A A to G (Default is BCS Space (0x20))	<R>
DESSRDT	<u>DES Security Source Date</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the date of the source used to derive the classification of the Segment. In the case of multiple sources, the date of the most recent source shall be used. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Security Source date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>

Table C-1-8. NSIF Data Extension Segment (DES) Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
DESCTLN	<u>DES Security Control Number</u> . This field is not for general use but may be employed by some national systems. This field shall contain a valid Security Control Number associated with the Segment. The format of the Security Control Number shall be in accordance with the regulations governing the appropriate security channel(s). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Security Control Number applies.	15	BCS-A (Default is BCS Spaces (0x20))	<R>
DESOFLW	<u>DES Overflowed Header Type</u> . This field shall be present if DESID is set to the value TRE_OVERFLOW. Its presence indicates that the DES contains a TRE that would not fit in the NSIF File Header or Segment Subheader where it would ordinarily be located. Its value indicates the Segment type to which the enclosed Tagged Record is relevant.	6	BCS-A XHD, IXSHD, SXSHD, TXSHD, UDHD, UDID	C
DESITEM	<u>DES Data Segment Overflowed</u> . This field shall be present if the DESOFLW field is present. It shall contain the number of the Data Segment in the NSIF File, of the type indicated by the value of the DESOFLW field to which the TRE in the Segment apply. For example, if the value of the DESOFLW field is UDID and the value of the DESITEM field is 003, then the TRE in the Segment apply to the third image in the NSIF File. If the value of the DESOFLW field is UDHD, the value of the DESITEM shall be BCS Zeros (code 0x30).	3	BCS-N positive integer 000 to 999	C
DESSHL	<u>DES User-Defined Subheader Length</u> . This field shall contain the number of bytes in the DESSHF field. If this field contains BCS Zeros (code 0x30), the DESSHF field shall not appear in the DES Subheader. This field shall contain BCS Zeros (code 0x30) if the value of the DESID field indicates CE or RE.	4	BCS-N positive integer 0000 to 9999 (Default is BCS Zeros (0x30))	R
DESSHF	<u>DES User-Defined Subheader Fields</u> . This field shall contain user-defined fields. Data in this field shall be alphanumeric, formatted according to user specification.	† ⁸	BCS-A User-defined	C
DESDATA	<u>DES User-Defined Data</u> . This field shall contain data of either binary or character types defined by and formatted according to the user's specification. However, if the DESID is set to the value TRE_OVERFLOW the Tagged Records shall appear according to their definition with no intervening bytes. The length (size) of this field shall not cause any other NSIF field length (size) limits to be exceeded, but is otherwise fully user-defined.	†† ⁸	User-defined.	R

†⁸ Value of the DESSHL field (in bytes)††⁸ Determined by user. If the DESID is set to the value TRE_OVERFLOW, this signifies the sum of the lengths of the included Tagged Records.

Table C-1-8(A). Tagged Record Extension Overflow (TRE_OVERFLOW)

Data Extension Segment (DES) Subheader

TYPE R = Required, C = Conditional, <> = BCS Spaces (code 0x20) are allowed for the entire field

(† annotations are explained at the end of the table)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
DE	<u>Data Extension Subheader</u> . This field shall contain the characters DE to identify the subheader as a data extension.	2	BCS-A DE	R
DESID	<u>Unique DES Type Identifier</u> . This field shall contain TRE_OVERFLOW	25	BCS-A TRE_OVERFLOW	R
DESVR	<u>Version of the Data Definition</u> . This field shall contain the alphanumeric version number of the use of the Tag. The version number is assigned as part of the registration process.	2	BCS-N positive integer 01	R
DECLAS	<u>Data Extension File Security Classification</u> . This field shall contain a valid value representing the classification level of the Segment. Valid values are T for Top Secret, S for Secret, C for Confidential, R for Restricted, or U for Unclassified.	1	BCS-A T, S, C, R, or U	R
NOTE: If the value of the DESCLAS field is T, S, C, or R, then the DESCLSY field must be populated with a valid code for the security classification system used.				
DESCLSY	<u>DES Security Classification System</u> . This field shall contain valid values indicating the national or multinational security system used to classify the Segment. Country Codes per FIPS PUB 10-4 are used to indicate national security systems. If this field is all BCS Spaces (code 0x20), it shall imply that no Security Classification System applies to the Segment.	2	BCS-A BE, CA, DA, FR, GM, GR, IC, IT, LU, NL, NO, PO, SP, TU, UK, US NS represents NATO Security System. Additional codes shall be registered with the Custodian. (Default is BCS Spaces (0x20))	<R>
NOTE: If any of the following fields are populated with anything other than spaces, then the DESCLSY field must be populated with a valid code for the security classification system used: DESCODE, DESREL, DESDCTP, DESDCDT, DESDCXM, DESDGM, DESDGDG, DESCLDES, DESCATP, DESCAUT, DESCRSN, DESSRDT, and DESCTLN.				
DESCODE	<u>DES Codewords</u> . This field shall contain a valid indicator of the security compartments associated with the Segment. Values include one or more of the digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). Multiple entries shall be separated by a single BCS Space (code 0x20). The selection of a relevant set of Codewords is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no Codewords apply to the Segment.	11	BCS-A (Default is BCS Spaces (0x20))	<R>
DESCTLH	<u>DES Control and Handling</u> . This field shall contain valid additional security Control and/or Handling instructions (caveats) associated with the Segment. Values include digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). The digraph may indicate single or multiple caveats. The selection of a relevant caveat(s) is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no additional Control and Handling instructions apply to the Segment.	2	BCS-A (Default is BCS Spaces (0x20))	<R>

Table C-1-8(A). Tagged Record Extension Overflow (TRE_OVERFLOW)
Data Extension Segment (DES) Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
DESREL	<u>DES Releasing Instructions</u> . This field shall contain a valid list of countries outside of NATO to which the Segment is authorised for release. Typical values include one or more country codes as found in FIPS PUB 10-4 separated by a single BCS Space (code 0x20). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Releasing instructions apply.	20	BCS-A (Default is BCS Spaces (0x20))	<R>
DESDCTP	<u>DES Declassification Type</u> . This field shall contain a valid indicator of the type of security Declassification or Downgrading instructions which apply to the Segment. Valid values are DD for declassify on a specific date, DE for declassify upon occurrence of an event, GD for downgrade to a specified level on a specific date, GE for downgrade to a specified level upon occurrence of an event, O for OADR, and X for exempt from automatic declassification. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment security Declassification or Downgrading instructions apply.	2	BCS-A DD, DE, GD, GE, O, X (Default is BCS Spaces (0x20))	<R>
DESDCDT	<u>DES Declassification Date</u> . This field shall indicate the date on which a Segment is to be declassified if the value of the DESDCTP field is DD. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Declassification date applies.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>
DESDCXM	<u>DES Declassification Exemption</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the reason the Segment is exempt from automatic declassification if the value of the DESDCTP field is X. Valid values are X1 to X8 and X251 to X259. X1 to X8 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-202b(1) to (8) for material exempt from the 10-year rule. X251 to X259 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-301a(1) to (9) for permanently valuable material exempt from the 25-year declassification system. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Declassification Exemption does not apply.	4	BCS-A X1 to X8 X251 to X259 (Default is BCS Spaces (0x20))	<R>
DESDG	<u>DES Downgrade</u> . This field shall indicate the classification level to which a Segment is to be downgraded if the value of the DESDCTP field is GD or GE. Valid values are S for Secret, C for Confidential, R for Restricted. If this field contains a BCS Space (code 0x20), it shall imply that Segment security Downgrading does not apply.	1	BCS-A S, C, R (Default is BCS Space (0x20))	<R>
DESDGDT	<u>DES Downgrade Date</u> . This field shall indicate the date on which a Segment is to be downgraded if the value of the DESDCTP field is GD. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment security Downgrading date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>

Table C-1-8(A). Tagged Record Extension Overflow (TRE_OVERFLOW)
Data Extension Segment (DES) Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
DESCLTX	<u>DES Classification Text</u> . This field shall be used to provide additional information about Segment classification to include identification of a Declassification or Downgrading event if the value of the DESDCTP field is DE or GE. It may also be used to identify multiple classification sources and/or any other special handling rules. Values are user-defined free text. If this field is all BCS Spaces (code 0x20), it shall imply that additional information about Segment classification does not apply.	43	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
DESCATP	<u>DES Classification Authority Type</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the type of authority used to classify the Segment. Valid values are O for original Classification Authority, D for derivative from a single source, and M for derivative from multiple sources. If this field contains a BCS Space (code 0x20), it shall imply that Segment Classification Authority type does not apply.	1	BCS-A O, D, M (Default is BCS Space (0x20))	<R>
DESCAUT	<u>DES Classification Authority</u> . This field is not for general use but may be employed by some national systems. This field shall identify the Classification Authority for the Segment dependent upon the value of the DESCATP field. Values are user-defined free text which should contain the following information: original Classification Authority name and position or personal ID if the of the DESCATP field is O; title of the document or security classification guide used to classify the Segment if the of the DESCATP field is D; and Derive-Multiple if the Segment classification was derived from multiple sources and the value of the DESCATP field is M. In the latter case, the Segment originator will maintain a record of the sources used in accordance with existing security directives. One of the multiple sources may also be identified by the DESCLTX field if desired. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Classification Authority applies.	40	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
DESCRSN	<u>DES Classification Reason</u> . This field is not for general use but may be employed by some national systems. This field shall contain values indicating the reason for classifying the Segment. Valid values are A to G. These correspond to the reasons for original classification per E.O. 12958, Section 1.5.(a) to (g). If this field contains a BCS Spaces (code 0x20), it shall imply that no Segment Classification Reason applies.	1	BCS-A A to G (Default is BCS Space (0x20))	<R>
DESSRDT	<u>DES Security Source Date</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the date of the source used to derive the classification of the Segment. In the case of multiple sources, the date of the most recent source shall be used. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Security Source date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>

Table C-1-8(A). Tagged Record Extension Overflow (TRE_OVERFLOW)
Data Extension Segment (DES) Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
DESCTLN	<u>DES Security Control Number</u> . This field is not for general use but may be employed by some national systems. This field shall contain a valid Security Control Number associated with the Segment. The format of the Security Control Number shall be in accordance with the regulations governing the appropriate security channel(s). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Security Control Number applies.	15	BCS-A (Default is BCS Spaces (0x20))	<R>
DESOWFLW	<u>Overflowed Header Type</u> . This field shall be present if DESID contains TRE_OVERFLOW. Its presence indicates that the DES contains a TRE that would not fit in the NSIF File Header or Segment Subheader where it would ordinarily be located. Its value indicates the data type to which the enclosed TRE is relevant.	6	BCS-A UDHD, UDID, XHD, IXSHD, SXSHD, TXSHD; otherwise, field is omitted.	C
DESIEM	<u>Data Item Overflowed</u> . This field shall be present if the DESOWFLW field is present. It shall contain the number of the data item in the NSIF File, of the type indicated in the DESOWFLW field to which the TRE in the Segment apply. If the value of the DESOWFLW field is UDHD or XHD the value of the DESIEM field shall be 000.	3	BCS-N positive integer 000 to 999	C
DESSHL	<u>DES User-Defined Subheader Length</u> .	4	BCS-N positive integer 0000	R
DESDATA	<u>DES-Defined Data Field</u> . This field shall contain data of either binary or character types defined by and formatted according to the user's specification. The length of this field shall not cause any other NSIF field length limits to be exceeded, but is otherwise fully user-defined.	† ^{8(A)}	User-defined TRE with no intervening octets.	R

†^{8(A)} Profile defined.

Table C-1-8(B). Streaming File Header (STREAMING_FILE_HEADER)

Data Extension Segment (DES) Subheader

TYPE R = Required, C = Conditional, <> = BCS Spaces (code 0x20) are allowed for the entire field

(† annotations are explained at the end of the table)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
DE	<u>Data Extension Subheader</u> . This field shall contain the characters DE to identify the subheader as a data extension.	2	BCS-A DE	R
DESID	<u>Unique DES Type Identifier</u> . This field shall contain STREAMING_FILE_HEADER.	25	BCS-A STREAMING_FILE_H EADER	R
DESVR	<u>Version of the Data Definition</u> . This field shall contain the alphanumeric version number of the use of the Tag. The version number is assigned as part of the registration process.	2	BCS-N positive integer 01	R
DECLAS	<u>Data Extension File Security Classification</u> . This field shall contain a valid value representing the classification level of the Segment. Valid values are T for Top Secret, S for Secret, C for Confidential, R for Restricted, or U for Unclassified.	1	BCS-A T, S, C, R, or U	R
NOTE: If the value of the DECLAS field is T, S, C, or R, then the DESCLSY field must be populated with a valid code for the security classification system used.				
DESCLSY	<u>DES Security Classification System</u> . This field shall contain valid values indicating the national or multinational security system used to classify the Segment. Country Codes per FIPS PUB 10-4 are used to indicate national security systems. If this field is all BCS Spaces (code 0x20), it shall imply that no Security Classification System applies to the Segment.	2	BCS-A BE, CA, DA, FR, GM, GR, IC, IT, LU, NL, NO, PO, SP, TU, UK, US NS represents NATO Security System. Additional codes shall be registered with the Custodian. (Default is BCS Spaces (0x20))	<R>
NOTE: If any of the following fields are populated with anything other than spaces, then the DESCLSY field must be populated with a valid code for the security classification system used: DESCODE, DESREL, DESDCTP, DESDCDT, DESDCXM, DESDGM, DESDGD, DESCLDES, DESCATP, DESCAUT, DESCRSN, DESSRDT, and DESCTLN.				
DESCODE	<u>DES Codewords</u> . This field shall contain a valid indicator of the security compartments associated with the Segment. Values include one or more of the digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). Multiple entries shall be separated by a single BCS Space (code 0x20). The selection of a relevant set of Codewords is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no Codewords apply to the Segment.	11	BCS-A (Default is BCS Spaces (0x20))	<R>
DESCTLH	<u>DES Control and Handling</u> . This field shall contain valid additional security Control and/or Handling instructions (caveats) associated with the Segment. Values include digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). The digraph may indicate single or multiple caveats. The selection of a relevant caveat(s) is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no additional Control and Handling instructions apply to the Segment.	2	BCS-A (Default is BCS Spaces (0x20))	<R>

Table C-1-8(B). Streaming File Header (STREAMING_FILE_HEADER)
Data Extension Segment (DES) Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
DESREL	<u>DES Releasing Instructions</u> . This field shall contain a valid list of countries outside of NATO to which the Segment is authorised for release. Typical values include one or more country codes as found in FIPS PUB 10-4 separated by a single BCS Space (code 0x20). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Releasing instructions apply.	20	BCS-A (Default is BCS Spaces (0x20))	<R>
DESDCTP	<u>DES Declassification Type</u> . This field shall contain a valid indicator of the type of security Declassification or Downgrading instructions which apply to the Segment. Valid values are DD for declassify on a specific date, DE for declassify upon occurrence of an event, GD for downgrade to a specified level on a specific date, GE for downgrade to a specified level upon occurrence of an event, O for OADR, and X for exempt from automatic declassification. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment security Declassification or Downgrading instructions apply.	2	BCS-A DD, DE, GD, GE, O, X (Default is BCS Spaces (0x20))	<R>
DESDCDT	<u>DES Declassification Date</u> . This field shall indicate the date on which a Segment is to be declassified if the value of the DESDCTP field is DD. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Declassification date applies.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>
DESDCXM	<u>DES Declassification Exemption</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the reason the Segment is exempt from automatic declassification if the value of the DESDCTP field is X. Valid values are X1 to X8 and X251 to X259. X1 to X8 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-202b(1) to (8) for material exempt from the 10-year rule. X251 to X259 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-301a(1) to (9) for permanently valuable material exempt from the 25-year declassification system. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Declassification Exemption does not apply.	4	BCS-A X1 to X8 X251 to X259 (Default is BCS Spaces (0x20))	<R>
DESDG	<u>DES Downgrade</u> . This field shall indicate the classification level to which a Segment is to be downgraded if the value of the DESDCTP field is GD or GE. Valid values are S for Secret, C for Confidential, R for Restricted. If this field contains a BCS Space (code 0x20), it shall imply that Segment security Downgrading does not apply.	1	BCS-A S, C, R (Default is BCS Space (0x20))	<R>
DESDGDT	<u>DES Downgrade Date</u> . This field shall indicate the date on which a Segment is to be downgraded if the value of the DESDCTP field is GD. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment security Downgrading date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>

Table C-1-8(B). Streaming File Header (STREAMING_FILE_HEADER)
Data Extension Segment (DES) Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
DESCLTX	<u>DES Classification Text</u> . This field shall be used to provide additional information about Segment classification to include identification of a Declassification or Downgrading event if the value of the DESDCTP field is DE or GE. It may also be used to identify multiple classification sources and/or any other special handling rules. Values are user-defined free text. If this field is all BCS Spaces (code 0x20), it shall imply that additional information about Segment classification does not apply.	43	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
DESCATP	<u>DES Classification Authority Type</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the type of authority used to classify the Segment. Valid values are O for original Classification Authority, D for derivative from a single source, and M for derivative from multiple sources. If this field contains a BCS Space (code 0x20), it shall imply that Segment Classification Authority type does not apply.	1	BCS-A O, D, M (Default is BCS Space (0x20))	<R>
DESCAUT	<u>DES Classification Authority</u> . This field is not for general use but may be employed by some national systems. This field shall identify the Classification Authority for the Segment dependent upon the value of the DESCATP field. Values are user-defined free text which should contain the following information: original Classification Authority name and position or personal ID if the of the DESCATP field is O; title of the document or security classification guide used to classify the Segment if the of the DESCATP field is D; and Derive-Multiple if the Segment classification was derived from multiple sources and the value of the DESCATP field is M. In the latter case, the Segment originator will maintain a record of the sources used in accordance with existing security directives. One of the multiple sources may also be identified by the DESCLTX field if desired. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Classification Authority applies.	40	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
DESCRSN	<u>DES Classification Reason</u> . This field is not for general use but may be employed by some national systems. This field shall contain values indicating the reason for classifying the Segment. Valid values are A to G. These correspond to the reasons for original classification per E.O. 12958, Section 1.5.(a) to (g). If this field contains a BCS Spaces (code 0x20), it shall imply that no Segment Classification Reason applies.	1	BCS-A A to G (Default is BCS Space (0x20))	<R>
DESSRDT	<u>DES Security Source Date</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the date of the source used to derive the classification of the Segment. In the case of multiple sources, the date of the most recent source shall be used. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Security Source date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>

Table C-1-8(B). Streaming File Header (STREAMING_FILE_HEADER)
Data Extension Segment (DES) Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
DESCTLN	<u>DES Security Control Number</u> . This field is not for general use but may be employed by some national systems. This field shall contain a valid Security Control Number associated with the Segment. The format of the Security Control Number shall be in accordance with the regulations governing the appropriate security channel(s). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Security Control Number applies.	15	BCS-A (Default is BCS Spaces (0x20))	<R>
DESSL	<u>DES User-Defined Subheader Length</u> .	4	BCS-N positive integer 0000	R
SFH_L1	<u>SFH Length 1</u> . This field shall contain the number of bytes in the SFH_DR field.	7	BCS-N positive integer 0 to 9999999	R
SFH_DELIM1	<u>SFH Delimiter 1</u> . This field shall contain the hexadecimal value 0x0A6E1D97. It provides a unique value that can be identified as the beginning of the replacement data.	4	BCS-A 0x0A6E1D97	R
SFH_DR	<u>Replacement Data</u> . This field shall contain the type string replacement for the NSIF File Header beginning with the FHDR field and continuing for the number of bytes indicated in the SFH_L1 or SFH_2 field. The NSIF File Header replication shall at least continue through all the NSIF File Header fields that are marked incomplete.	†		R
SFH_DELIM2	<u>SFH Delimiter 2</u> . This field shall contain the hexadecimal value 0x0ECA14BF. It provides a unique value that can be identified as the end of the replacement data.	4	BCS-A 0x0ECA14BF	R
SFH_L2	SFH Length 2. A repeat of SFH-L1, this field shall contain the number of bytes in the SFHDR field.	7	BCS-N positive integer 0 to 9999999	R

Table C-1-9. NSIF Reserved Extension Segment (RES) Subheader
 TYPE R = Required, C = Conditional, <> = BCS Spaces (code 0x20) are allowed for the entire field
 († annotations are explained at the end of the table)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
RE	<u>File Part Type</u> . This field shall contain the characters RE to identify the Subheader as a Reserved Extension Subheader.	2	BCS-A RE	R
RESID	<u>Unique RES Type Identifier</u> . This field shall contain a valid alphanumeric ID that is properly registered with the Custodian.	25	BCS-A (Registered value only)	R
RESVER	<u>Version of the Data Definition</u> . This field shall contain the alphanumeric version number of the use of the Tag. The version number is assigned as part of the registration process.	2	BCS-N positive integer 01 to 99	R
RECLAS	<u>Reserved Extension File Security Classification</u> . This field shall contain a valid value representing the classification level of the Segment. Valid values are T for Top Secret, S for Secret, C for Confidential, R for Restricted, or U for Unclassified.	1	BCS-A T, S, C, R, or U	R
NOTE: If the value of the RECLAS field is T, S, C, or R, then the RECLSY field must be populated with a valid code for the security classification system used.				
RECLSY	<u>RES Security Classification System</u> . This field shall contain valid values indicating the national or multinational security system used to classify the Segment. Country Codes per FIPS PUB 10-4 are used to indicate national security systems. If this field is all BCS Spaces (code 0x20), it shall imply that no Security Classification System applies to the Segment.	2	BCS-A BE, CA, DA, FR, GM, GR, IC, IT, LU, NL, NO, PO, SP, TU, UK, US NS represents NATO Security System. Additional codes shall be registered with the Custodian. (Default is BCS Spaces (0x20))	<R>
NOTE: If any of the following fields are populated with anything other than spaces, then the RECLSY field must be populated with a valid code for the security classification system used: RECODE, REREL, REDCTP, REDCDT, REDCXM, REDG, REDGDT, RECLTX, RECATP, RECAUT, RECRSN, RESRDT, and RECLTN.				
RECODE	<u>RES Codewords</u> . This field shall contain a valid indicator of the security compartments associated with the Segment. Values include one or more of the digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). Multiple entries shall be separated by a single BCS Space (code 0x20). The selection of a relevant set of Codewords is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no Codewords apply to the Segment.	11	BCS-A (Default is BCS Spaces (0x20))	<R>
RECTLH	<u>RES Control and Handling</u> . This field shall contain valid additional security Control and/or Handling instructions (caveats) associated with the Segment. Values include digraphs found in Table C-1-4, which is based on NATO C-M(55) 15 (Final) Volume I, and Table C-1-4(A). The digraph may indicate single or multiple caveats. The selection of a relevant caveat(s) is application specific. If this field is all BCS Spaces (code 0x20), it shall imply that no additional Control and Handling instructions apply to the Segment.	2	BCS-A (Default is BCS Spaces (0x20))	<R>

Table C-1-9. NSIF Reserved Extension Segment (RES) Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
REREL	<u>RES Releasing Instructions</u> . This field shall contain a valid list of countries outside of NATO to which the Segment is authorised for release. Typical values include one or more country codes as found in FIPS PUB 10-4 separated by a single BCS Space (code 0x20). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Releasing instructions apply.	20	BCS-A (Default is BCS Spaces (0x20))	<R>
REDCTP	<u>RES Declassification Type</u> . This field shall contain a valid indicator of the type of security Declassification or Downgrading instructions which apply to the Segment. Valid values are DD for declassify on a specific date, DE for declassify upon occurrence of an event, GD for downgrade to a specified level on a specific date, GE for downgrade to a specified level upon occurrence of an event, O for OADR, and X for exempt from automatic declassification. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment security Declassification or Downgrading instructions apply.	2	BCS-A DD, DE, GD, GE, O, X (Default is BCS Spaces (0x20))	<R>
REDCDT	<u>RES Declassification Date</u> . This field shall indicate the date on which a Segment is to be declassified if the value of the REDCTP field is DD. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Declassification date applies.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>
RED CXM	<u>RES Declassification Exemption</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the reason the Segment is exempt from automatic declassification if the value of the REDCTP field is X. Valid values are X1 to X8 and X251 to X259. X1 to X8 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-202b(1) to (8) for material exempt from the 10-year rule. X251 to X259 correspond to the declassification exemptions found in DOD 5200.1-R, paragraphs 4-301a(1) to (9) for permanently valuable material exempt from the 25-year declassification system. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Declassification Exemption does not apply.	4	BCS-A X1 to X8, X251 to X259, (Default is BCS Spaces (0x20))	<R>
REDG	<u>RES Downgrade</u> . This field shall indicate the classification level to which a Segment is to be downgraded if the value of the REDCTP field is GD or GE. Valid values are S for Secret, C for Confidential, R for Restricted. If this field contains a BCS Space (code 0x20), it shall imply that Segment security Downgrading does not apply.	1	BCS-A S, C, R (Default is BCS Space (0x20))	<R>
REDGDT	<u>RES Downgrade Date</u> . This field shall indicate the date on which a Segment is to be downgraded if the value of the REDCTP field is GD. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment security Downgrading date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>

Table C-1-9. NSIF Reserved Extension Segment (RES) Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
RECLTX	<u>RES Classification Text</u> . This field shall be used to provide additional information about Segment classification to include identification of a Declassification or Downgrading event if the value of the REDCTP field is DE or GE. It may also be used to identify multiple classification sources and/or any other special handling rules. Values are user-defined free text. If this field is all BCS Spaces (code 0x20), it shall imply that additional information about Segment classification does not apply.	43	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
RECATP	<u>RES Classification Authority Type</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the type of authority used to classify the Segment. Valid values are O for original Classification Authority, D for derivative from a single source, and M for derivative from multiple sources. If this field contains a BCS Space (code 0x20), it shall imply that Segment Classification Authority type does not apply.	1	BCS-A O, D, M (Default is BCS Space (0x20))	<R>
RECAUT	<u>RES Classification Authority</u> . This field is not for general use but may be employed by some national systems. This field shall identify the Classification Authority for the Segment dependent upon the value of the RECATP field. Values are user-defined free text which should contain the following information: original Classification Authority name and position or personal ID if the value of the RECATP field is O; title of the document or security classification guide used to classify the Segment if the of the RECATP field is D; and Deriv-Multiple if the Segment classification was derived from multiple sources and the value of the RECATP field is M. In the latter case, the Segment originator will maintain a record of the sources used in accordance with existing security directives. One of the multiple sources may also be identified by the RECLTX field if desired. If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Classification Authority applies.	40	BCS-A User-defined free text (Default is BCS Spaces (0x20))	<R>
RECRSN	<u>RES Classification Reason</u> . This field is not for general use but may be employed by some national systems. This field shall contain values indicating the reason for classifying the Segment. Valid values are A to G. These correspond to the reasons for original classification per E.O. 12958, Section 1.5.(a) to (g). If this field contains a BCS Space (code 0x20), it shall imply that no Segment classification reason applies.	1	BCS-A A to G (Default is BCS Space (0x20))	<R>
RESRDT	<u>RES Security Source Date</u> . This field is not for general use but may be employed by some national systems. This field shall indicate the date of the source used to derive the classification of the Segment. In the case of multiple sources, the date of the most recent source shall be used. If this field is all BCS Spaces (code 0x20), it shall imply that a Segment Security Source date does not apply.	8	BCS-A CCYYMMDD (Default is BCS Spaces (0x20))	<R>

Table C-1-9. NSIF Reserved Extension Segment (RES) Subheader (continued)

FIELD	NAME	SIZE	VALUE RANGE	TYPE
RECTLN	<u>RES Security Control Number</u> . This field is not for general use but may be employed by some national systems. This field shall contain a valid Security Control Number associated with the Segment. The format of the Security Control Number shall be in accordance with the regulations governing the appropriate security channel(s). If this field is all BCS Spaces (code 0x20), it shall imply that no Segment Security Control Number applies.	15	BCS-A (Default is BCS Spaces (0x20))	<R>
RESSHL	<u>RES User-Defined Subheader Length</u> . This field shall contain the number of bytes in the RESSHf field. If this field contains BCS Zeros (code 0x30), the RESSHf field shall not appear in the RES Subheader.	4	BCS-N positive integer 0000 to 9999 (Default is BCS Zeros (0x30))	R
RESSHF	<u>RES User-Defined Subheader Fields</u> . This field shall contain user-defined fields. Data in this field shall be alphanumeric, formatted according to user specification.	† ⁹	BCS-A User-defined	C
RESDATA	<u>RES User-defined Data</u> . This field shall contain data of either binary or character types defined by and formatted according to the user's specification. The length (size) of this field shall not cause any other NSIF Field length (size) limits to be exceeded, but is otherwise fully user-defined.	†† ⁹	User-defined	R

†⁹ Value of the RESSHL field (in bytes)††⁹ Determined by the definition of the specific RES as registered and controlled with the Custodian.

APPENDIX 2 TO ANNEX C. EXAMPLE NSIF FILE

This appendix contains general or explanatory information that may be helpful but is not mandatory.

1. Use of NSIF. Though the NSIF was conceived initially to support the transmission of a file composed of a single base image, image insets (subimage overlays), graphic overlays, and text, its current form makes it suitable for a wide variety of file exchange needs. One of the flexible features of the NSIF is that it allows several Segments to be included in one NSIF File, yet any of the data types may be omitted. Thus, for example, the NSIF may equally well be used for the storage of a single portion of text, a single image or a complex composition of several images, graphics, and text. The following section discusses an example NSIF File of moderate complexity.

2. Example NSIF File. Table C-2-1 shows the contents of the fields in the Header of a sample NSIF File composed of two ISs, (an image with an inset image), five GS overlays (two of which are multi-displayable element graphic segments), and five TS. Figure C-2-1 shows a part of the sample NSIF File as a composite image with its overlay graphics. In a NSIF File, the data of each Segment is stored in a Data Field preceded by the Segment Subheader. The Subheader for a data type is omitted if no data of that type of Segment are included in the NSIF File. Segment Subheader Field contents in the sample NSIF File are shown in Table C-2-2 to Table C-2-9.

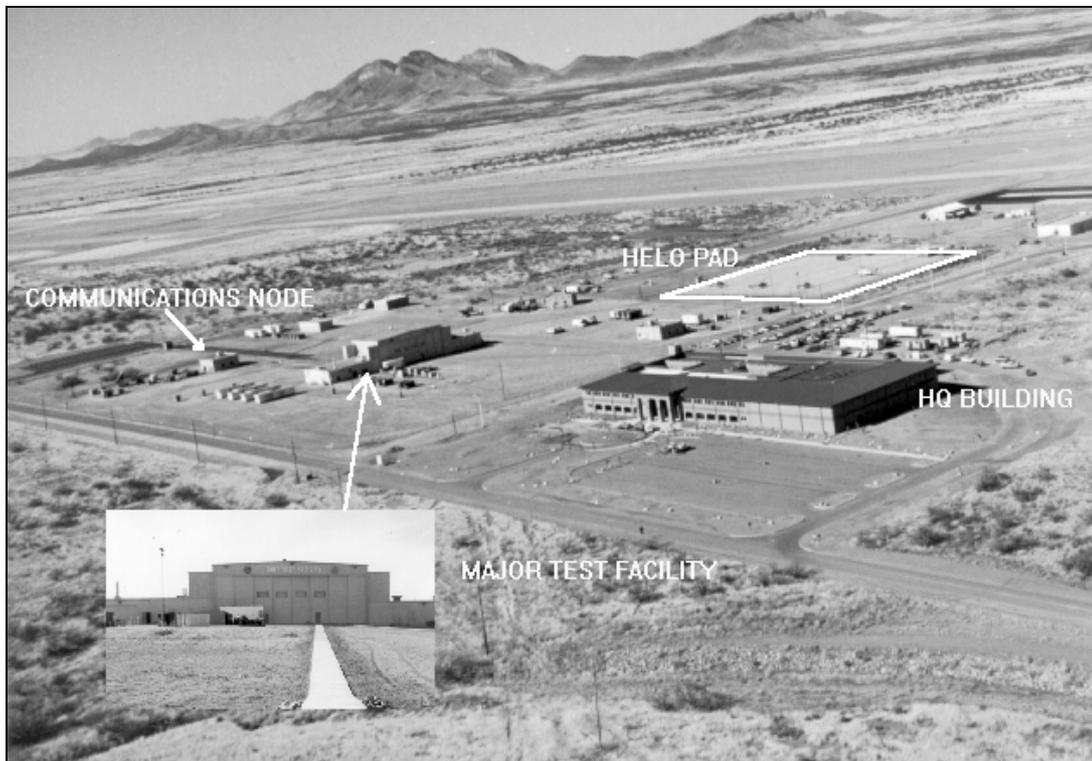


Figure C-2-1. Sample NSIF File Composite Image

Table C-2-1. Example NSIF File Header

NSIF HEADER FIELD	FORMAT	COMMENT
File Profile Name (FHDR)	NSIF	4 characters
File Version (FVER)	01.00	5 characters
Complexity Level (CLEVEL)	05	2 characters - images less than or equal to 8k x 8k but greater than 2k x 2k in either or both rows and columns
Standard Type (STYPE)	BF01	4 characters
Originating Station Identifier (OSTAID)	U21SO090	8 characters followed by 2 BCS Spaces (code 0x20) - 10 characters
File Date and Time (FDT)	19960930224632	14 digits
File Title (FTITLE)	MAJOR TEST FACILITY	19 characters followed by 61 BCS Spaces (code 0x20) - 80 characters
File Security Classification (FSCLAS)	U	1 character
File Security Classification System (FSCLSY)	NS	2 characters
File Codewords (FSCODE)		11 BCS Spaces (code 0x20)
File Control and Handling (FSCTLH)		2 BCS Spaces (code 0x20)
File Releasing Instructions (FSREL)		20 BCS Spaces (code 0x20)
File Declassification Type (FSDCTP)		2 BCS Spaces (code 0x20)
File Declassification Date (FSDCDT)		8 BCS Spaces (code 0x20)
File Declassification Exemption (FSDCXM)		4 BCS Spaces (code 0x20)
File Downgrade (FSDG)		1 BCS Spaces (code 0x20)
File Downgrade Date (FSDGDT)		8 BCS Spaces (code 0x20)
File Classification Text (FSCLTX)		43 BCS Spaces (code 0x20)
File Classification Authority Type (FSCATP)		1 BCS Spaces (code 0x20)
File Classification Authority (FSCAUT)		40 BCS Spaces (code 0x20)
File Classification Reason (FSCRSN)		1 BCS Spaces (code 0x20)
File Security Source Date (FSSRDT)		8 BCS Spaces (code 0x20)
File Security Control Number (FSCTLN)		15 BCS Spaces (code 0x20)
File Copy Number (FSCOP)	00000	5 digits - all zeros indicate there is no tracking of NSIF File copies
File Number of Copies (FSCPYS)	00000	5 digits - all zeros indicate there is no tracking of NSIF File copies
Encryption (ENCRYP)	0	1 digit - required default
File Background Colour (FBKGC)	0x000000	3 bytes (binary)
Originator's Name (ONAME)	W. Tempel	9 characters followed by 15 BCS Spaces (code 0x20) - 24 characters
Originator's Phone Number (OPHONE)	44 1480 84 5611	15 characters followed by 3 BCS Spaces (code 0x20) - 18 characters

Table C-2-1. Example NSIF File Header (continued)

NSIF HEADER FIELD	FORMAT	COMMENT
File Length (FL)	000002925155	12 digits
NSIF File Header Length (HL)	000515	6 digits
Number of Image Segments (NUMI)	002	3 digits
Length of 1st Image Subheader (LISH001)	000679	6 digits
Length of 1st Image Segment (LI001)	0002730600	10 digits
Length of 2nd Image Subheader (LISH002)	000439	6 digits
Length of 2nd Image Segment (LI002)	0000089600	10 digits
Number of Graphics Segments (NUMS)	005	3 digits
Length of 1st Graphic Subheader (LSSH001)	0258	4 digits
Length of 1st Graphic Segment (LS001)	000122	6 digits
Length of 2nd Graphic Subheader (LSSH002)	0258	4 digits
Length of 2nd Graphic Segment (LS002)	000122	6 digits
Length of 3rd Graphic Subheader (LSSH003)	0258	4 digits
Length of 3rd Graphic Segment (LS003)	000150	6 digits
Length of 4th Graphic Subheader (LSSH004)	0258	4 digits
Length of 4th Graphic Segment (LS004)	000112	6 digits
Length of 5th Graphic Subheader (LSSH005)	0258	4 digits
Length of 5th Graphic Segment (LS005)	000116	6 digits
Reserved for Future Use (NUMX)	000	3 digits
Number of Text Segments (NUMT)	005	3 digits
Length of 1st Text Subheader (LTSH001)	0282	4 digits
Length of 1st Text Segment (LT001)	20000	5 digits
Length of 2nd Text Subheader (LTSH002)	0282	4 digits
Length of 2nd Text Segment (LT002)	20000	5 digits
Length of 3rd Text Subheader (LTSH003)	0282	4 digits
Length of 3rd Text Segment (LT003)	20000	5 digits
Length of 4th Text Subheader (LTSH004)	0282	4 digits
Length of 4th Text Segment (LT004)	20000	5 digits
Length of 5th Text Subheader (LTSH005)	0282	4 digits
Length of 5th Text Segment (LT005)	20000	5 digits
Number of Data Extension Segments (NUMDES)	000	3 digits

Table C-2-1. Example NSIF File Header (continued)

NSIF HEADER FIELD	FORMAT	COMMENT
Number of Reserved Extension Segments (NUMRES)	000	3 digits
User-Defined Header Data Length (UDHDL)	00000	5 digits
Extended Header Data Length (XHDL)	00000	5 digits

a. Explanation of the NSIF File Header. The NSIF File Type and Version, NSIF 01.00, is listed first. The next field contains the NSIF File's CLEVEL, in this case 05. A four character reserved field for the System Type (STYPE), defaulted to blanks, appears next. An identification code containing ten characters for the station originating the primary information in the NSIF File is given next. The NSIF File origination date and time follow this and are given in UTC (Zulu) time format. This is followed by the NSIF File Title (FTITLE) Field containing up to 80 characters of free form text. The title of the sample NSIF File contains less than 80 characters, and therefore, the remainder of the field is padded with blanks. The File Security Classification (FSCLAS) follows and contains one character. Several security-related optional fields and a conditional field follow. The next field, File Background Colour (FBKGC), defines the background colour behind displayable segments. It eliminates the potential to visually lose information if the originator selects a presentation colour that is the same as the receiver's selected background colour. Encryption (ENCRYPT) is given a 0 indicating that the NSIF File is not encrypted. The Originator's Name (ONAME) and the Originator's Phone Number (OPHONE) are given next. These fields may be left blank. Then the length in bytes (File Length (FL) Field) of the entire NSIF File is given, including all Headers, Subheaders, and data. This is followed by the length in bytes (HL field) of the NSIF File Header. The NUMI field contains the characters 002 to indicate two images are included in the NSIF File. This is followed by six characters to specify the LISHn, then ten characters for the LIn. The length of the second Image Subheader and the length of the second image follow. The next field in the NSIF File Header is the Number of Graphics (NUMS) Field, which contains 005 to indicate that five graphics are present in the NSIF File. The next ten characters contain the Length of Graphic Subheader (LSSHn) and Length of Graphic (LSn) (four and six characters respectively) for the first to fifth graphics, one after the other. The field, Number of Text Files (NUMT), is given as 005 and is followed by four characters specifying the Length of the Text Subheader (LTSHn) and five characters specifying the number of characters in the TS (Length of Text Segment (LTn) for each of the five TSs. The Number of Data Extension Segments (NUMDES) and the Number of Reserved Extension Segments (NUMRES) Fields are given as 000. This completes the road map for separating the data Subheaders from the actual data to follow. The next two fields in the Header are the User-Defined Header Data Length (UDHDL) and the UDHD. User-defined data could be used to include Registered TRE that provide additional information about the NSIF File. In this example, however, the length of the UDHDL is given as zero; therefore, the UDHD field is omitted. The last field in the Header is the Extended Header Data Length (XHDL). The length of the Extended Header is given as zero; therefore, the XHDL field is omitted, indicating that no Controlled TRE are included in the NSIF File Header.

b. Explanation of the Image Subheaders.Table C-2-2. Example of the First Image Subheader
(† annotations are explained at the end of the table)

NSIF IMAGE SUBHEADER FIELD	FORMAT	COMMENT
File Part Type (IM)	IM	2 characters
Image Identifier 1 (IID1)	0000000001	10 characters
Image Date and Time (IDATIM)	19960825203147	14 digits
Target Identifier (TGTID)		17 BCS Spaces (code 0x20)
Image Identifier 2 (IID2)	MAJOR TEST FACILITY AND HQ	26 characters followed by 54 BCS Spaces (code 0x20) - 80 characters
Image Security Classification (ISCLAS)	U	1 character
Image Security Classification System (ISCLSY)	NS	2 characters
Image Codewords (ISCODE)		11 BCS Spaces (code 0x20)
Image Control and Handling (ISCTLH)		2 BCS Spaces (code 0x20)
Image Releasing Instructions (ISREL)		20 BCS Spaces (code 0x20)
Image Declassification Type (ISDCTP)		2 BCS Spaces (code 0x20)
Image Declassification Date (ISDCDT)		8 BCS Spaces (code 0x20)
Image Declassification Exemption (ISDCXM)		4 BCS Spaces (code 0x20)
Image Downgrade (ISDG)		1 BCS Space (code 0x20)
Image Downgrade Date (ISDGDT)		8 BCS Spaces (code 0x20)
Image Classification Text (ISCLTX)		43 BCS Spaces (code 0x20)
Image Classification Authority Type (ISCATP)		1 BCS Space (code 0x20)
Image Classification Authority (ISCAUT)		40 BCS Spaces (code 0x20)
Image Classification Reason (ISCRSN)		1 BCS Space (code 0x20)
Image Security Source Date (ISSRDT)		8 BCS Spaces (code 0x20)
Image Security Control Number (ISCTLN)		15 BCS Spaces (code 0x20)
Encryption (ENCRYP)	0	1 digit - required default
Image Source (ISORCE)	Hand-held digital camera model XYZ.	35 characters followed by 7 BCS Spaces (code 0x20) - 42 characters
Number of Significant Rows in Image (NROWS)	00001332	8 digits
Number of Significant Columns in Image (NCOLS)	00002050	8 digits
Pixel Value Type (PVTYPE)	INT	3 characters - indicating pixel values as integers

Table C-2-2. Example of the First Image Subheader (continued)

NSIF IMAGE SUBHEADER FIELD	FORMAT	COMMENT
Image Representation (IREP)	MONO	4 characters followed by 4 BCS Spaces (code 0x20) - grey scale imagery
Image Category (ICAT)	VIS	3 characters followed by 5 BCS Spaces (code 0x20) - visible imagery
Actual Bits-Per-Pixel per Band (ABPP)	08	2 digits
Pixel Justification (PJUST)	R	1 character
Image Coordinate Representation (ICORDS)		BCS Space (code 0x20) - indicates no geo location coordinates
Number of Image Comments (NICOM)	3	1 digit
† ² Image Comment 1 (ICOM1)	This is a comment on Major Test Facility base and associated inset. This file w	80 characters
† ² Image Comment 2 (ICOM2)	as developed at Fort Huachuca, Arizona. It shows the Joint Interoperability Tes	80 characters
† ² Image Comment 3 (ICOM3)	t Command Building and associated range areas.	44 characters followed by 36 BCS Spaces (code 0x20) - 80 characters
Image Compression (IC)	NC	2 characters - indicates no compression
Number of Bands (NBANDS)	1	1 digit
1st Band Representation (IREPBAND1)		2 BCS Spaces (code 0x20)
1st Band Subcategory (ISUBCAT1)		6 BCS Spaces (code 0x20)
1st Band Image Filter Condition (IFC1)	N	1 character - required default value
1st Band Standard Image Filter Code (IMFLT1)		3 BCS Spaces (code 0x20) - reserved
Number of LUTs for the 1st Image Band (NLUTS1)	0	1 digit
Image Sync Code (ISYNC)	0	1 digit
Image Mode (IMODE)	B	1 character - B required for 1 band
Number of Blocks Per Row (NBPR)	0001	4 digits
Number of Blocks Per Column (NBPC)	0001	4 digits

Table C-2-2. Example of the First Image Subheader (continued)

NSIF IMAGE SUBHEADER FIELD	FORMAT	COMMENT
Number of Pixels Per Block Horizontal (NPPBH)	2050	4 digits
Number of Pixels Per Block Vertical (NPPBV)	1332	4 digits
Number of Bits Per Pixel (NBPP)	08	2 digits
Image Display Level (IDLVL)	001	3 digits - minimum DLVL requires this value
Image Attachment Level (IALVL)	000	required 3 digit value since minimum DLVL.
Image Location (ILOC)	0000000000	10 digits upper left pixel located at origin of CCS
Image Magnification (IMAG)	1.0	3 character followed by a BCS Spaces (code 0x20) - 4 characters
User-Defined Image Data Length (UDIDL)	00000	5 digits
Image Extended Subheader Data Length (IXSHDL)	00000	5 digits

†² According to the standard - this should look like a single contiguous comment of up to three 80 character blocks.

(1) Explanation of the First Image Subheader. There are two images in this sample NSIF File. The first image has IDLVL001. Its Subheader is shown in Table C-2-2. It is an unclassified, single band, single block, grey scale image with 8 bits per pixel and does not have an associated LUT. There are three associated comments. It is visible imagery, does not have geo-location data and is stored as an uncompressed image. It is located at the origin of the CCS within which all the displayable NSIF File components are located. It is 1332 rows by 2050 columns. Figure C-2-1 illustrates the image printed at approximately three hundred pixels per inch.

Table C-2-3. Example of the Second Image Subheader

NSIF IMAGE SUBHEADER FIELD	FORMAT	COMMENT
File Part Type (IM)	IM	2 characters
Image Identifier 1 (IID1)	Missing ID	10 characters
Image Date and Time (IDATIM)	19960927011729	14 digits
Target Identifier (TGTID)		17 BCS Spaces (code 0x20)
Image Identifier 2 (IID2)	Zoomed Test Facility	18 characters followed by 62 BCS Spaces (code 0x20) - 80 characters
Image Security Classification (ISCLAS)	U	1 character
Image Security Classification System (ISCLSY)	NS	2 characters
Image Codewords (ISCODE)		11 BCS Spaces (code 0x20)
Image Control and Handling (ISCTLH)		2 BCS Spaces (code 0x20)
Image Releasing Instructions (ISREL)		20 BCS Spaces (code 0x20)
Image Declassification Type (ISDCTP)		2 BCS Spaces (code 0x20)
Image Declassification Date (ISDCDT)		8 BCS Spaces (code 0x20)
Image Declassification Exemption (ISDCXM)		4 BCS Spaces (code 0x20)
Image Downgrade (ISDG)		1 BCS Space (code 0x20)
Image Downgrade Date (ISDGDT)		8 BCS Spaces (code 0x20)
Image Classification Text (ISCLTX)		43 BCS Spaces (code 0x20)
Image Classification Authority Type (ISCATP)		1 BCS Space (code 0x20)
Image Classification Authority (ISCAUT)		40 BCS Spaces (code 0x20)
Image Classification Reason (ISCRSN)		1 BCS Space (code 0x20)
Image Security Source Date (ISSRDT)		8 BCS Spaces (code 0x20)
Image Security Control Number (ISCTLN)		15 BCS Spaces (code 0x20)
Encryption (ENCRYP)	0	1 digit - required default
Image Source (ISORCE)	Cut of original image.	22 characters followed by 20 BCS Spaces (code 0x20) - 42 characters
Number of Significant Rows in Image (NROWS)	00000224	8 digits
Number of Significant Columns in Image (NCOLS)	00000400	8 digits
Pixel Value Type (PVTYPE)	INT	3 characters - indicating pixel values as integers
Image Representation (IREP)	MONO	4 characters followed by 4 BCS Spaces (code 0x20) - grey scale imagery
Image Category (ICAT)	VIS	3 characters followed by 5 BCS Spaces (code 0x20) - visible imagery

Table C-2-3. Example of the Second Image Subheader (continued)

NSIF IMAGE SUBHEADER FIELD	FORMAT	COMMENT
Actual Bits-Per-Pixel per Band (ABPP)	08	2 digits
Pixel Justification (PJUST)	R	1 character
Image Coordinate Representation (ICORDS)		BCS Space (0x20) indicates no geo location coordinates
Number of Image Comments (NICOM)	0	1 digit
Image Compression (IC)	NC	2 characters - indicates uncompressed
Number of Bands (NBANDS)	1	1 digit
1st Band Representation (IREPBAND1)		2 BCS Spaces (code 0x20)
1st Band Subcategory (ISUBCAT1)		6 BCS Spaces (code 0x20)
1st Band Image Filter Condition (IFC1)	N	1 character - required default value
1st Band Standard Image Filter Code (IMFLT1)		3 BCS Spaces (code 0x20) - reserved
Number of LUTs for the 1st Image Band (NLUTS1)	0	1 digit
Image Sync Code (ISYNC)	0	1 digit
Image Mode (IMODE)	B	1 character - B required for 1 band
Number of Blocks Per Row (NBPR)	0001	4 digits
Number of Blocks Per Column (NBPC)	0001	4 digits
Number of pixels Per Block Horizontal (NPPBH)	0600	4 digits
Number of Pixels Per Block Vertical (NPPBV)	0350	4 digits
Number Bits Per Pixel per Band (NBPP)	08	2 digits
Image Display Level (IDLVL)	002	3 digits
Image Attachment Level (IALVL)	001	3 digits
Image Location (ILOC)	0088000205	10 digits, located at row 880 column 205 of base image
Image Magnification (IMAG)	1.0	3 characters followed by a BCS Spaces (code 0x20) - 4 characters
User-Defined Image Data Length (UDIDL)	00000	5 digits
Image Extended Subheader Data Length (IXSHDL)	00000	5 digits

(2) Explanation of the Second Image Subheader. This image is the second image in the NSIF File. As is the first image, this image is an 8 bit visible, grey scale image. It is much smaller (600 columns x 350 rows) and is not compressed. Also, unlike the first image, it has no associated comment fields, indicated by the fact that the value of the Number of Image Comments (NICOM) Field is equal to zero. Since it is attached to the base image (IALVL contains 001), the ILOC field reveals that this image is located with its upper left corner positioned at Row 880, Column 205 with respect to the upper left corner of the base image. Since it has a DLVL greater than that of the base image, it will obscure part of the base image when they are both displayed.

c. Explanation of the Graphic Subheaders.

Table C-2-4. Graphic Subheader for the First Graphic

NSIF GRAPHIC SUBHEADER FIELD	FORMAT	COMMENT
File Part Type (SY)	SY	2
Graphic Identifier (SID)	0000000001	10
Graphic Name (SNAME)	HELO PAD RECTANGLE	18 characters followed by 2 BCS Spaces (code 0x20) - 20 characters
Graphic Security Classification (SSCLAS)	U	1 character
Graphic Security Classification System (SSCLSY)	NS	2 characters
Graphic Codewords (SSCODE)		11 BCS Spaces (code 0x20)
Graphic Control and Handling (SSCTLH)		2 BCS Spaces (code 0x20)
Graphic Releasing Instructions (SSREL)		20 BCS Spaces (code 0x20)
Graphic Declassification Type (SSDCTP)		2 BCS Spaces (code 0x20)
Graphic Declassification Date (SSDCDT)		8 BCS Spaces (code 0x20)
Graphic Declassification Exemption (SSDCXM)		4 BCS Spaces (code 0x20)
Graphic Downgrade (SSDG)		1 BCS Space (code 0x20)
Graphic Downgrade Date (SSDGDT)		8 BCS Spaces (code 0x20)
Graphic Classification Text (SSCLTX)		43 BCS Spaces (code 0x20)
Graphic Classification Authority Type (SSCATP)		1 BCS Space (code 0x20)
Graphic Classification Authority (SSCAUT)		40 BCS Spaces (code 0x20)
Graphic Classification Reason (SSCRSN)		1 BCS Space (code 0x20)
Graphic Security Source Date (SSSRDT)		8 BCS Spaces (code 0x20)
Graphic Security Control Number (SSCTLN)		15 BCS Spaces (code 0x20)
Encryption (ENCRYP)	0	1 digit - required default
Graphic Type (SFMT)	C	1 character - indicates CGM
Reserved for Future Use (SSTRUCT)	0000000000000	13 BCS Zeros (code 0x30) - reserved
Graphic Display Level (SDLVL)	003	3 digits
Graphic Attachment Level (SALVL)	001	3 digits
Graphic Location (SLOC)	0041501160	10 digits
First Graphic Bound Location (SBND1)	0041501160	10 digits
Graphic Colour (SCOLOR)	M	indicates CGM File contains no colour components
Second Graphic Bound Location (SBND2)	0051001812	10 digits
Reserved for Future Use (SRES2)	00	2 BCS Zeros (code 0x30) - reserved

Table C-2-4. Graphic Subheader for the First Graphic (continued)

NSIF GRAPHIC SUBHEADER FIELD	FORMAT	COMMENT
Graphic Extended Subheader Data Length (SXSHDL)	00000	5 digits

(1) Explanation of the First Graphic Subheader. This graphic is a CGM graphic (HELO PAD RECTANGLE). The graphic is attached to the base image, and its location is recorded in the SLOC field (row 415, column 1160) and is measured as an offset from the origin at the upper left corner of that image.

Table C-2-5. Graphic Subheader for the Second Graphic

NSIF GRAPHIC SUBHEADER FIELD	FORMAT	COMMENT
File Part Type (SY)	SY	2
Graphic Identifier (SID)	0000000002	10
Graphic Name (SNAME)	ARROW	5 characters followed by 15 BCS Spaces (code 0x20) - 20 characters
Graphic Security Classification (SSCLAS)	U	1 character
Graphic Security Classification System (SSCLSY)	NS	2 characters
Graphic Codewords (SSCODE)		11 BCS Spaces (code 0x20)
Graphic Control and Handling (SSCTLH)		2 BCS Spaces (code 0x20)
Graphic Releasing Instructions (SSREL)		20 BCS Spaces (code 0x20)
Graphic Declassification Type (SSDCTP)		2 BCS Spaces (code 0x20)
Graphic Declassification Date (SSDCDT)		8 BCS Spaces (code 0x20)
Graphic Declassification Exemption (SSDCXM)		4 BCS Spaces (code 0x20)
Graphic Downgrade (SSDG)		1 BCS Space (code 0x20)
Graphic Downgrade Date (SSDGDT)		8 BCS Spaces (code 0x20)
Graphic Classification Text (SSCLTX)		43 BCS Spaces (code 0x20)
Graphic Classification Authority Type (SSCATP)		1 BCS Space (code 0x20)
Graphic Classification Authority (SSCAUT)		40 BCS Spaces (code 0x20)
Graphic Classification Reason (SSCRSN)		1 BCS Space (code 0x20)
Graphic Security Source Date (SSSRDT)		8 BCS Spaces (code 0x20)
Graphic Security Control Number (SSCTLN)		15 BCS Spaces (code 0x20)
Encryption (ENCRYP)	0	1 digit - required default
Graphic Type (SFMT)	C	1 character - indicates CGM
Reserved for Future Use (SSTRUCT)	000000000000	13 BCS Zeros (code 0x30) - reserved
Graphic Display Level (SDLVL)	004	3 digits
Graphic Attachment Level (SALVL)	002	3 digits
Graphic Location (SLOC)	0000000430	10 digits relative to origin of second image
First Graphic Bound Location (SBND1)	-022500430	10 digits relative to origin of second image
Graphic Colour (SCOLOR)	M	indicates CGM File contains no colour components
Second Graphic Bound Location (SBND2)	0000000518	10 digits relative to origin of second image

Table C-2-5. Graphic Subheader for the Second Graphic (continued)

NSIF GRAPHIC SUBHEADER FIELD	FORMAT	COMMENT
Reserved for Future Use (SRES2)	00	2 BCS Zeros (code 0x30) - reserved
Graphic Extended Subheader Data Length (SXSHDL)	00000	5 digits

(2) Explanation of the Second Graphic Subheader. The second graphic is also a CGM graphic. It is the arrow pointing to the test facility. It is attached to the subimage. Therefore, its location as recorded in the SLOC field is measured as an offset from the upper left corner of the subimage.

Table C-2-6. Graphic Subheader for the Third Graphic

NSIF GRAPHIC SUBHEADER FIELD	FORMAT	COMMENT
File Part Type (SY)	SY	2
Graphic Identifier (SID)	0000000003	10
Graphic Name (SNAME)	HQ BUILDING	11 characters followed by 9 BCS Spaces (code 0x20) - 20 characters
Graphic Security Classification (SSCLAS)	U	1 character
Graphic Security Classification System (SSCLSY)	NS	2 characters
Graphic Codewords (SSCODE)		11 BCS Spaces (code 0x20)
Graphic Control and Handling (SSCTLH)		2 BCS Spaces (code 0x20)
Graphic Releasing Instructions (SSREL)		20 BCS Spaces (code 0x20)
Graphic Declassification Type (SSDCTP)		2 BCS Spaces (code 0x20)
Graphic Declassification Date (SSDCDT)		8 BCS Spaces (code 0x20)
Graphic Declassification Exemption (SSDCXM)		4 BCS Spaces (code 0x20)
Graphic Downgrade (SSDG)		1 BCS Space (code 0x20)
Graphic Downgrade Date (SSDGD)		8 BCS Spaces (code 0x20)
Graphic Classification Text (SSCLTX)		43 BCS Spaces (code 0x20)
Graphic Classification Authority Type (SSCATP)		1 BCS Space (code 0x20)
Graphic Classification Authority (SSCAUT)		40 BCS Spaces (code 0x20)
Graphic Classification Reason (SSCRSN)		1 BCS Space (code 0x20)
Graphic Security Source Date (SSSRDT)		8 BCS Spaces (code 0x20)
Graphic Security Control Number (SSCTLN)		15 BCS Spaces (code 0x20)
Encryption (ENCRYP)	0	1 digit - required default
Graphic Type (SFMT)	C	1 character - indicates CGM
Reserved for Future Use (SSTRUCT)	00000000000000	13 BCS Zeros (code 0x30) - reserved
Graphic Display Level (SDLVL)	005	3 digits
Graphic Attachment Level (SALVL)	001	3 digits
Graphic Location (SLOC)	0066001705	10 digits
First Graphic Bound Location (SBND1)	0066001705	10 digits
Graphic Colour (SCOLOR)	M	indicates CGM File contains no colour components
Second Graphic Bound Location (SBND2)	00700001990	10 digits
Reserved for Future Use (SRES2)	00	2 BCS Zeros (code 0x30) - reserved
Graphic Extended Subheader Data Length (SXSHDL)	00000	5 digits

(3) Explanation of the Third Graphic Subheader. The third graphic is a CGM annotation (HQ Building). It is attached to the base image. Its location as recorded in the SLOC field is measured as an offset from the upper left corner of the base image, in this case the value of the SLOC field is (0,0) and the offsetting for this graphic is actually done within the CGM construct itself.

Table C-2-7. Graphic Subheader for the Fourth Graphic

NSIF GRAPHIC SUBHEADER FIELD	FORMAT	COMMENT
File Part Type (SY)	SY	2
Graphic Identifier (SID)	0000000004	10
Graphic Name (SNAME)	MAJOR TEST FACILITY	19 characters followed by 1 BCS Space (code 0x20) - 20 characters
Graphic Security Classification (SSCLAS)	U	1 character
Graphic Security Classification System (SSCLSY)	NS	2 characters
Graphic Codewords (SSCODE)		11 BCS Spaces (code 0x20)
Graphic Control and Handling (SSCTLH)		2 BCS Spaces (code 0x20)
Graphic Releasing Instructions (SSREL)		20 BCS Spaces (code 0x20)
Graphic Declassification Type (SSDCTP)		2 BCS Spaces (code 0x20)
Graphic Declassification Date (SSDCDT)		8 BCS Spaces (code 0x20)
Graphic Declassification Exemption (SSDCXM)		4 BCS Spaces (code 0x20)
Graphic Downgrade (SSDG)		1 BCS Space (code 0x20)
Graphic Downgrade Date (SSDGDT)		8 BCS Spaces (code 0x20)
Graphic Classification Text (SSCLTX)		43 BCS Spaces (code 0x20)
Graphic Classification Authority Type (SSCATP)		1 BCS Space (code 0x20)
Graphic Classification Authority (SSCAUT)		40 BCS Spaces (code 0x20)
Graphic Classification Reason (SSCRSN)		1 BCS Space (code 0x20)
Graphic Security Source Date (SSSRDT)		8 BCS Spaces (code 0x20)
Graphic Security Control Number (SSCTLN)		15 BCS Spaces (code 0x20)
Encryption (ENCRYP)	0	1 digit - required default
Graphic Type (SFMT)	C	1 character - indicates CGM
Reserved for Future Use (SSTRUCT)	00000000000000	13 BCS Zeros (code 0x30)
Graphic Display Level (SDLVL)	006	3 digits
Graphic Attachment Level (SALVL)	002	3 digits
Graphic Location (SLOC)	0008500655	10 digits, relative to origin of second image
First Graphic Bound Location (SBND1)	0008500655	10 digits, relative to origin of second image
Graphic Colour (SCOLOR)	M	Indicates CGM File contains no colour components
Second Graphic Bound Location (SBND2)	0012001120	10 digits, relative to origin of second image

Table C-2-7. Graphic Subheader for the Fourth Graphic (continued)

NSIF GRAPHIC SUBHEADER FIELD	FORMAT	COMMENT
Reserved for Future Use (SRES2)	00	2 BCS Zeros (code 0x30) - reserved
Graphic Extended Subheader Data Length (SXSHDL)	00000	5 digits

(4) Explanation of the Fourth Graphic Subheader. The fourth graphic is a CGM graphic. It is the MAJOR TEST FACILITY text. It is attached to the subimage. Therefore, its location as recorded in the SLOC field is measured as an offset from the upper left corner of the subimage.

Table C-2-8. Graphic Subheader for the Fifth Graphic

NSIF GRAPHIC SUBHEADER FIELD	FORMAT	COMMENT
File Part Type (SY)	SY	2
Graphic Identifier (SID)	0000000005	10
Graphic Name (SNAME)	COMMUNICATI ON ARROW	19 characters followed by 1 BCS Space (code 0x20) - 20 characters
Graphic Security Classification (SSCLAS)	U	1 character
Graphic Security Classification System (SSCLSY)	NS	2 characters
Graphic Codewords (SSCODE)		11 BCS Spaces (code 0x20)
Graphic Control and Handling (SSCTLH)		2 BCS Spaces (code 0x20)
Graphic Releasing Instructions (SSREL)		20 BCS Spaces (code 0x20)
Graphic Declassification Type (SSDCTP)		2 BCS Spaces (code 0x20)
Graphic Declassification Date (SSDCDT)		8 BCS Spaces (code 0x20)
Graphic Declassification Exemption (SSDCXM)		4 BCS Spaces (code 0x20)
Graphic Downgrade (SSDG)		1 BCS Space (code 0x20)
Graphic Downgrade Date (SSDGDT)		8 BCS Spaces (code 0x20)
Graphic Classification Text (SSCLTX)		43 BCS Spaces (code 0x20)
Graphic Classification Authority Type (SSCATP)		1 BCS Space (code 0x20)
Graphic Classification Authority (SSCAUT)		40 BCS Spaces (code 0x20)
Graphic Classification Reason (SSCRSN)		1 BCS Space (code 0x20)
Graphic Security Source Date (SSSRDT)		8 BCS Spaces (code 0x20)
Graphic Security Control Number (SSCTLN)		15 BCS Spaces (code 0x20)
Encryption (ENCRYP)	0	1 digit - required default
Graphic Type (SFMT)	C	1 character - indicates CGM
Reserved for Future Use (SSTRUCT)	000000000000	13 BCS Zeros (code 0x30)
Graphic Display Level (SDLVL)	007	3 digits
Graphic Attachment Level (SALVL)	001	3 digits
Graphic Location (SLOC)	0047000040	10 digits
First Graphic Bound Location (SBND1)	0047000040	10 digits
Graphic Colour (SCOLOR)	M	Indicates CGM File contains no colour components
Second Graphic Bound Location (SBND2)	0059000600	10 digits
Reserved for Future Use (SRES2)	00	2 BCS Zeros (code 0x30) - reserved
Graphic Extended Subheader Data Length (SXSHDL)	00000	5 digits

(5) Explanation of the Fifth Graphic Subheader. The fifth graphic is a CGM graphic. It is the COMMUNICATIONS NODE annotation with associated arrow. It is attached to the base image. Therefore, its location as recorded in the SLOC field is measured as an offset from the upper left corner of the base image.

d. Explanation of the Text Subheaders. There are 5 TSs included in the NSIF File. Other than the text data they differ only in matters such as title, date-time of creation, and ID. Therefore, only the first is discussed, since the Subheaders of all the rest are essentially the same.

Table C-2-9. Text Subheader for the Text Segment (TS)

NSIF TEXT SUBHEADER FIELD	FORMAT	COMMENT
File Part Type (TE)	TE	2 characters
Text Identifier (TEXTID)	0000001	7 characters
Text Attachment Level (TXTALVL)	001	3 characters
Text Date and Time (TXTDT)	19960930224530	14 characters
Text Title (TXTITL)	Title of the first TS.	22 characters followed by 58 BCS Spaces (code 0x20) - 80 characters
Text Security Classification (TSCLAS)	U	1 character
Text Security Classification System (TSCLSY)	NS	2 characters
Text Codewords (TSCODE)		11 BCS Spaces (code 0x20)
Text Control and Handling (TSCTLH)		2 BCS Spaces (code 0x20)
Text Releasing Instructions (TSREL)		20 BCS Spaces (code 0x20)
Text Declassification Type (TSDCTP)		2 BCS Spaces (code 0x20)
Text Declassification Date (TSDCDT)		8 BCS Spaces (code 0x20)
Text Declassification Exemption (TSDCXM)		4 BCS Spaces (code 0x20)
Text Downgrade (TSDG)		1 BCS Space (code 0x20)
Text Downgrade Date (TSDGDT)		8 BCS Spaces (code 0x20)
Text Classification Text (TSCLTX)		43 BCS Spaces (code 0x20)
Text Classification Authority Type (TSCATP)		1 BCS Space (code 0x20)
Text Classification Authority (TSCAUT)		40 BCS Spaces (code 0x20)
Text Classification Reason (TSCRSN)		1 BCS Space (code 0x20)
Text Security Source Date (TSSRDT)		8 BCS Spaces (code 0x20)
Text Security Control Number (TSCTLN)		15 BCS Spaces (code 0x20)
Encryption (ENCRYP)	0	1 digit - required default
Text Format (TXTFMT)	STA	3 characters
Text Extended Subheader Data Length (TXSHDL)	00000	5 digits

(1) Explanation of the First Text Subheader. The first TS is unclassified and was created on September 30, 1996 at 22:45 hours. Its Subheader is shown in Table C-2-9.

APPENDIX 3 TO ANNEX C. IMPLEMENTATION CONSIDERATIONSGENERAL

This appendix contains general or explanatory information that may be helpful but is not mandatory.

1. NSIF Implementation Guidelines. The NSIF has been developed to provide image exchange capabilities among computer systems of various designs and capabilities. This appendix will discuss general considerations pertinent to successful NSIF implementation. Guidelines will be presented, and potential problems will be highlighted. The NSIF pre-processor and post-processor software, the software necessary to write and read a NSIF File based on host files containing the Segments to be included, are to be written by the user. The combination of the pre-processor and post-processor hereafter will be referred to as the NSIF implementation. Pre-processing is sometimes called packing, and post-processing is called unpacking. NSIF implementation sample software is available through your point of contact. NSIF implementations will be able to pack and unpack National Imagery Transmission Format Version 2.0 (NITF 2.0) Files (MIL-STD-2500A) for interoperability considerations.

GENERAL REQUIREMENTS

2. Scope of NSIF Implementation. NSIF describes the format of images and graphics and text within the NSIF File only. It does not define the image or text requirements of the host system. The host system is responsible for the handling of unpacked image and text, as well as image and text display capabilities.

3. Creating NSIF Headers and NSIF Subheaders. This standard specifies legal values for the Header and Subheader Fields. The NSIF pre-processor for any particular host system will be responsible for enforcing the field values as stated in this standard.

4. Character Counts. The NSIF uses explicit byte counts to delimit fields. No end-of-field characters are used. These byte counts are critical for the proper interpretation of a NSIF File. The NSIF pre-processor should compute these byte counts based on the NSIF File contents to insure accuracy. All fields in the NSIF File Header and Subheaders must be present exactly as specified in the NSIF File Header and Subheader descriptions, and no additional fields may be inserted. The NSIF uses various conditional fields whose presence is determined by previous fields and counts. If an expected conditional field is missing, the remainder of the NSIF File will be misinterpreted. A similar result will occur if a conditional field is inserted when it is not required. For these reasons, the counts are critical, and every effort must be made to ensure their accuracy. The NSIF pre-processor should compute these counts based on the NSIF File contents whenever possible.

5. Data Entry. To reduce any operator workload imposed by the pre-processor, each pre-processor should provide for the automatic entry of data. Global default values for the particular NSIF Version should be inserted automatically in the NSIF File. System default values, such as the standard size parameters for a base image, also should be entered automatically by the pre-processor. Values that are known to the system, such as the time or the computed size of an overlay, also should be entered automatically.

6. User-Defined NSIF File Header and User-Defined Image Subheader Data Fields. Users may need to add additional data to a NSIF File Header or Image Subheader. To accommodate this requirement, user-defined Data Fields are provided in the NSIF File Header and Image Subheader. One potential use for the user-defined Image Subheader Data Field is to provide space for directly associating acquisition parameters with the image. Use of the user-defined Header and user-defined Image Subheader Data Fields requires insertion of Tagged Records that implement the extension as described in this standard. Before use, Tags shall be registered with the Custodian according to procedures available from the Custodian. This procedure ensures that different users will not use the same Tag to flag different extended data. It also provides for configuration management of Tagged Record formats where the extended data are expected to be used by a wide audience of users.

a. Handling the Extended Headers and Subheaders. The NSIF has made allowances for future enhancements by defining Extended Headers and Subheaders, the contents of which are under configuration control. These fields should not be used except as provided for in documentation available from the Custodian. These Extended Headers are composed of an Extended Header byte count and Extended Header data. The Extended Header count must be extracted by the software, and the appropriate number of

Extended Header bytes must be read or bypassed. Five Extended Headers are in the current NSIF format under configuration

control. They are the XHD in the NSIF Header, the IXSHD in the Image Subheader, the SXSHD in the Graphic Subheader, and the TXSHD in the Text Subheader. The NSIF also has made allowances for Extended Headers that are under user control by providing the UDHD field in the NSIF Header and the UDID field in the Image Subheader. Use of these fields must be co-ordinated with the Custodian by Tag registration, but it is not under configuration management. Implementors are reminded that these Extended Headers also must be handled properly (skip over them if there are no means to interpret them properly).

7. Out-of-Bounds Field Values. The NSIF File creator is responsible for ensuring that all NSIF field values are within the bounds specified by the NSIF document. An out-of-bounds value in a NSIF field indicates that either an error occurred or that the sending station was not in full compliance with NSIF.

8. Use of Images in NSIF. The NSIF specifies a format for images contained within a NSIF File only. A NSIF implementation must be capable of translating this format to and from the host systems local format. Some host systems have multiple formats for binary data. In these cases, the NSIF implementation must use the appropriate host format to provide the necessary data exchange services with other system packages. When imagery data of N bits-per-pixel is displayed on an M-bit (2^M grey shades) display device ($N < M$), it must be transformed into the dynamic range of the device. One way to do this is to modify the LUTs of the display device. However, if M-bit and N-bit imagery is displayed simultaneously, the M-bit image will appear distorted. The recommended method is to convert the N-bit imagery into M-bit imagery, then use the standard LUTs. The following equation will transform a N-bit pixel into an M-bit pixel:

M = number of bits-per-pixel of display device
 N = number of bits-per-pixel of image (Table C-1-3, field ABPP) where $N < M$
 P_N = N-bit pixel value
 P_M = M-bit pixel value

$$P_M = \frac{2^M - 1}{2^N - 1} P_N$$

9. Use of Text in NSIF. The TXTFMT field (Table C-1-6) is provided to help the NSIF File reader determine how to interpret the text data received. The NSIF File reader is responsible for interpreting the various text data formats and associated character sets. Character set designations explicitly supported by the NSIF are addressed in Annex C paragraphs 7 and 25.

10. Formatted Documents. The TS is intended to convey plain text, not marked up text typical of word processed documents. In the future, formatted documents, e.g., Standardized Graphic Mark-up Language (SGML), Hypertext Mark-up Language (HTML), Rich Text Format (RTF), etc. may be accommodated using specialised DES. However, at the time of publication, a DES to contain formatted documents had not been defined. Should such a DES may be developed, they must be submitted through the STANAG 4545 Configuration Management process.

11. Converting Colour to Grey Scale. Full colour may be specified as the file background and for various attributes of segments within a NSIF File (e.g. colour imagery and colour annotations). Colour items for receiving systems unable to support the presentation of full colours must be mapped to colours that are able to be supported and displayed.

a. Eight-bit Grey Scale Presentation. For 8-bit grey scale systems an appropriate conversion is:

$$\text{GREY (8-bit)} = 0.299 * \text{RED} + 0.587 * \text{GREEN} + 0.114 * \text{BLUE}$$

b. One-bit Grey Scale Presentation. For 1-bit bi-tonal (e.g. black and white) systems, an appropriate conversion is to first calculate the grey scale conversion as shown above. Then,

$$\text{BITONE(1-bit)} = 1 \text{ (white), when GREY (8-bit)} > 127$$

$$\text{BITONE(1-bit)} = 0 \text{ (black), when GREY (8-bit)} \leq 127$$

Table C-3-1. NSIF 1-Byte Coded Characters

Char	Name	Code			Character Set							
		Dec	Hex	Binary	U8S	ECS	ECS-A	BCS	BCS-A	BCS-N	BCS-N Integer	BCS-N Positive Integers
	NOT USED	000	00	0000 0000								
	NOT USED	001	01	0000 0001								
	NOT USED	002	02	0000 0010								
	NOT USED	003	03	0000 0011								
	NOT USED	004	04	0000 0100								
	NOT USED	005	05	0000 0101								
	NOT USED	006	06	0000 0110								
	NOT USED	007	07	0000 0111								
	NOT USED	008	08	0000 1000								
	NOT USED	009	09	0000 1001								
	LINE FEED	010	0A	0000 1010	X	X		X				
	NOT USED	011	0B	0000 1011								
	FORM FEED	012	0C	0000 1100	X	X		X				
	CARRIAGE RETURN	013	0D	0000 1101	X	X		X				
	NOT USED	014	0E	0000 1110								
	NOT USED	015	0F	0000 1111								
	NOT USED	016	10	0001 0000								
	NOT USED	017	11	0001 0001								
	NOT USED	018	12	0001 0010								
	NOT USED	019	13	0001 0011								
	NOT USED	020	14	0001 0100								
	NOT USED	021	15	0001 0101								
	NOT USED	022	16	0001 0110								
	NOT USED	023	17	0001 0111								
	NOT USED	024	18	0001 1000								
	NOT USED	025	19	0001 1001								
	NOT USED	026	1A	0001 1010								
	NOT USED	027	1B	0001 1011								
	NOT USED	028	1C	0001 1100								
	NOT USED	029	1D	0001 1101								
	NOT USED	030	1E	0001 1110								
	NOT USED	031	1F	0001 1111								

Table C-3-1. NSIF 1-Byte Coded Characters (continued)

Char	Name	Code			Character Set							
		Dec	Hex	Binary	U8S	ECS	ECS-A	BCS	BCS-A	BCS-N	BCS-N Integer	BCS-N Positive Integers
	SPACE	032	20	0010 0000	X	X	X	X	X			
!	EXCLAMATION MARK	033	21	0010 0001	X	X	X	X	X			
"	QUOTATION MARK	034	22	0010 0010	X	X	X	X	X			
#	NUMBER SIGN	035	23	0010 0011	X	X	X	X	X			
\$	DOLLAR SIGN	036	24	0010 0100	X	X	X	X	X			
%	PERCENT SIGN	037	25	0010 0101	X	X	X	X	X			
&	AMPERSAND	038	26	0010 0110	X	X	X	X	X			
'	APOSTROPHE	039	27	0010 0111	X	X	X	X	X			
(LEFT PARENTHESIS	040	28	0010 1000	X	X	X	X	X			
)	RIGHT PARENTHESIS	041	29	0010 1001	X	X	X	X	X			
*	ASTERISK	042	2A	0010 1010	X	X	X	X	X			
+	PLUS SIGN	043	2B	0010 1011	X	X	X	X	X	X	X	
,	COMMA	044	2C	0010 1100	X	X	X	X	X			
-	HYPHEN-MINUS	045	2D	0010 1101	X	X	X	X	X	X	X	
.	FULL STOP	046	2E	0010 1110	X	X	X	X	X	X		
/	SOLIDUS	047	2F	0010 1111	X	X	X	X	X	X		
0	DIGIT ZERO	048	30	0011 0000	X	X	X	X	X	X	X	X
1	DIGIT ONE	049	31	0011 0001	X	X	X	X	X	X	X	X
2	DIGIT TWO	050	32	0011 0010	X	X	X	X	X	X	X	X
3	DIGIT THREE	051	33	0011 0011	X	X	X	X	X	X	X	X
4	DIGIT FOUR	052	34	0011 0100	X	X	X	X	X	X	X	X
5	DIGIT FIVE	053	35	0011 0101	X	X	X	X	X	X	X	X
6	DIGIT SIX	054	36	0011 0110	X	X	X	X	X	X	X	X
7	DIGIT SEVEN	055	37	0011 0111	X	X	X	X	X	X	X	X
8	DIGIT EIGHT	056	38	0011 1000	X	X	X	X	X	X	X	X
9	DIGIT NINE	057	39	0011 1001	X	X	X	X	X	X	X	X
:	COLON	058	3A	0011 1010	X	X	X	X	X			
;	SEMICOLON	059	3B	0011 1011	X	X	X	X	X			
<	LESS-THAN SIGN	060	3C	0011 1100	X	X	X	X	X			
=	EQUALS SIGN	061	3D	0011 1101	X	X	X	X	X			
>	GREATER-THAN SIGN	062	3E	0011 1110	X	X	X	X	X			

Table C-3-1. NSIF 1-Byte Coded Characters (continued)

Char	Name	Code			Character Set							
		Dec	Hex	Binary	U8S	ECS	ECS-A	BCS	BCS-A	BCS-N	BCS-N Integer	BCS-N Positive Integers
?	QUESTION MARK	063	3F	0011 1111	X	X	X	X	X			
@	COMMERCIAL AT	064	40	0100 0000	X	X	X	X	X			
A	LATIN CAPITAL LETTER A	065	41	0100 0001	X	X	X	X	X			
B	LATIN CAPITAL LETTER B	066	42	0100 0010	X	X	X	X	X			
C	LATIN CAPITAL LETTER C	067	43	0100 0011	X	X	X	X	X			
D	LATIN CAPITAL LETTER D	068	44	0100 0100	X	X	X	X	X			
E	LATIN CAPITAL LETTER E	069	45	0100 0101	X	X	X	X	X			
F	LATIN CAPITAL LETTER F	070	46	0100 0110	X	X	X	X	X			
G	LATIN CAPITAL LETTER G	071	47	0100 0111	X	X	X	X	X			
H	LATIN CAPITAL LETTER H	072	48	0100 1000	X	X	X	X	X			
I	LATIN CAPITAL LETTER I	073	49	0100 1001	X	X	X	X	X			
J	LATIN CAPITAL LETTER J	074	4A	0100 1010	X	X	X	X	X			
K	LATIN CAPITAL LETTER K	075	4B	0100 1011	X	X	X	X	X			
L	LATIN CAPITAL LETTER L	076	4C	0100 1100	X	X	X	X	X			
M	LATIN CAPITAL LETTER M	077	4D	0100 1101	X	X	X	X	X			
N	LATIN CAPITAL LETTER N	078	4E	0100 1110	X	X	X	X	X			
O	LATIN CAPITAL LETTER O	079	4F	0100 1111	X	X	X	X	X			
P	LATIN CAPITAL LETTER P	080	50	0101 0000	X	X	X	X	X			
Q	LATIN CAPITAL LETTER Q	081	51	0101 0001	X	X	X	X	X			
R	LATIN CAPITAL LETTER R	082	52	0101 0010	X	X	X	X	X			
S	LATIN CAPITAL LETTER S	083	53	0101 0011	X	X	X	X	X			
T	LATIN CAPITAL LETTER T	084	54	0101 0100	X	X	X	X	X			
U	LATIN CAPITAL LETTER U	085	55	0101 0101	X	X	X	X	X			
V	LATIN CAPITAL LETTER V	086	56	0101 0110	X	X	X	X	X			
W	LATIN CAPITAL LETTER W	087	57	0101 0111	X	X	X	X	X			
X	LATIN CAPITAL LETTER X	088	58	0101 1000	X	X	X	X	X			
Y	LATIN CAPITAL LETTER Y	089	59	0101 1001	X	X	X	X	X			
Z	LATIN CAPITAL LETTER Z	090	5A	0101 1010	X	X	X	X	X			
[LEFT SQUARE BRACKET	091	5B	0101 1011	X	X	X	X	X			
\	REVERSE SOLIDUS	092	5C	0101 1100	X	X	X	X	X			
]	RIGHT SQUARE BRACKET	093	5D	0101 1101	X	X	X	X	X			

Table C-3-1. NSIF 1-Byte Coded Characters (continued)

Char	Name	Code			Character Set							
		Dec	Hex	Binary	U8S	ECS	ECS-A	BCS	BCS-A	BCS-N	BCS-N Integer	BCS-N Positive Integers
^	CIRCUMFLEX ACCENT	094	5E	0101 1110	X	X	X	X	X			
_	LOW LINE	095	5F	0101 1111	X	X	X	X	X			
`	GRAVE ACCENT	096	60	0110 0000	X	X	X	X	X			
a	LATIN SMALL LETTER A	097	61	0110 0001	X	X	X	X	X			
b	LATIN SMALL LETTER B	098	62	0110 0010	X	X	X	X	X			
c	LATIN SMALL LETTER C	099	63	0110 0011	X	X	X	X	X			
d	LATIN SMALL LETTER D	100	64	0110 0100	X	X	X	X	X			
e	LATIN SMALL LETTER E	101	65	0110 0101	X	X	X	X	X			
f	LATIN SMALL LETTER F	102	66	0110 0110	X	X	X	X	X			
g	LATIN SMALL LETTER G	103	67	0110 0111	X	X	X	X	X			
h	LATIN SMALL LETTER H	104	68	0110 1000	X	X	X	X	X			
i	LATIN SMALL LETTER I	105	69	0110 1001	X	X	X	X	X			
j	LATIN SMALL LETTER J	106	6A	0110 1010	X	X	X	X	X			
k	LATIN SMALL LETTER K	107	6B	0110 1011	X	X	X	X	X			
l	LATIN SMALL LETTER L	108	6C	0110 1100	X	X	X	X	X			
m	LATIN SMALL LETTER M	109	6D	0110 1101	X	X	X	X	X			
n	LATIN SMALL LETTER N	110	6E	0110 1110	X	X	X	X	X			
o	LATIN SMALL LETTER O	111	6F	0110 1111	X	X	X	X	X			
p	LATIN SMALL LETTER P	112	70	0111 0000	X	X	X	X	X			
q	LATIN SMALL LETTER Q	113	71	0111 0001	X	X	X	X	X			
r	LATIN SMALL LETTER R	114	72	0111 0010	X	X	X	X	X			
s	LATIN SMALL LETTER S	115	73	0111 0011	X	X	X	X	X			
t	LATIN SMALL LETTER T	116	74	0111 0100	X	X	X	X	X			
u	LATIN SMALL LETTER U	117	75	0111 0101	X	X	X	X	X			
v	LATIN SMALL LETTER V	118	76	0111 0110	X	X	X	X	X			
w	LATIN SMALL LETTER W	119	77	0111 0111	X	X	X	X	X			
x	LATIN SMALL LETTER X	120	78	0111 1000	X	X	X	X	X			
y	LATIN SMALL LETTER Y	121	79	0111 1001	X	X	X	X	X			
z	LATIN SMALL LETTER Z	122	7A	0111 1010	X	X	X	X	X			
{	LEFT CURLY BRACKET	123	7B	0111 1011	X	X	X	X	X			
	VERTICAL LINE	124	7C	0111 1100	X	X	X	X	X			

Table C-3-1. NSIF 1-Byte Coded Characters (continued)

Char	Name	Code			Character Set							
		Dec	Hex	Binary	U8S	ECS	ECS-A	BCS	BCS-A	BCS-N	BCS-N Integer	BCS-N Positive Integers
}	RIGHT CURLY BRACKET	125	7D	0111 1101	X	X	X	X	X			
~	TILDE	126	7E	0111 1110	X	X	X	X	X			
	NOT USED	127	7F	0111 1111								
	NOT USED	128	80	1000 0000								
	NOT USED	129	81	1000 0001								
	NOT USED	130	82	1000 0010								
	NOT USED	131	83	1000 0011								
	NOT USED	132	84	1000 0100								
	NOT USED	133	85	1000 0101								
	NOT USED	134	86	1000 0110								
	NOT USED	135	87	1000 0111								
	NOT USED	136	88	1000 1000								
	NOT USED	137	89	1000 1001								
	NOT USED	138	8A	1000 1010								
	NOT USED	139	8B	1000 1011								
	NOT USED	140	8C	1000 1100								
	NOT USED	141	8D	1000 1101								
	NOT USED	142	8E	1000 1110								
	NOT USED	143	8F	1000 1111								
	NOT USED	144	90	1001 0000								
	NOT USED	145	91	1001 0001								
	NOT USED	146	92	1001 0010								
	NOT USED	147	93	1001 0011								
	NOT USED	148	94	1001 0100								
	NOT USED	149	95	1001 0101								
	NOT USED	150	96	1001 0110								
	NOT USED	151	97	1001 0111								
	NOT USED	152	98	1001 1000								
	NOT USED	153	99	1001 1001								
	NOT USED	154	9A	1001 1010								
	NOT USED	155	9B	1001 1011								

Table C-3-1. NSIF 1-Byte Coded Characters (continued)

Char	Name	Code			Character Set							
		Dec	Hex	Binary	U8S	ECS	ECS-A	BCS	BCS-A	BCS-N	BCS-N Integer	BCS-N Positive Integers
	NOT USED	156	9C	1001 1100								
	NOT USED	157	9D	1001 1101								
	NOT USED	158	9E	1001 1110								
	NOT USED	159	9F	1001 1111								
	NO BREAK SPACE	160	A0	1010 0000		X	X					
¡	INVERTED EXCLAMATION MARK	161	A1	1010 0001		X	X					
¢	CENT SIGN	162	A2	1010 0010		X	X					
£	POUND SIGN	163	A3	1010 0011		X	X					
¤	CURRENCY SIGN	164	A4	1010 0100		X	X					
¥	YEN SIGN	165	A5	1010 0101		X	X					
¦	BROKEN BAR	166	A6	1010 0110		X	X					
§	SECTION SIGN	167	A7	1010 0111		X	X					
¨	DIAERESIS	168	A8	1010 1000		X	X					
©	COPYRIGHT	169	A9	1010 1001		X	X					
^a	FEMININE ORDINAL INDICATOR	170	AA	1010 1010		X	X					
«	LEFT-POINTING DOUBLE ANGLE QUOTATION MARK	171	AB	1010 1011		X	X					
¬	NOT SIGN	172	AC	1010 1100		X	X					
-	SOFT HYPHEN	173	AD	1010 1101		X	X					
®	REGISTERED SIGN	174	AE	1010 1110		X	X					
ˉ	MACRON	175	AF	1010 1111		X	X					
°	DEGREE SIGN	176	B0	1011 0000		X	X					
±	PLUS-MINUS SIGN	177	B1	1011 0001		X	X					
²	SUPERSCRIPIT TWO	178	B2	1011 0010		X	X					
³	SUPERSCRIPIT THREE	179	B3	1011 0011		X	X					
´	ACUTE ACCENT	180	B4	1011 0100		X	X					
µ	MICRO SIGN	181	B5	1011 0101		X	X					
¶	PILCROW SIGN	182	B6	1011 0110		X	X					
·	MIDDLE DOT	183	B7	1011 0111		X	X					
¸	CEDILLA	184	B8	1011 1000		X	X					
¹	SUPERSCRIPIT ONE	185	B9	1011 1001		X	X					

Table C-3-1. NSIF 1-Byte Coded Characters (continued)

Char	Name	Code			Character Set							
		Dec	Hex	Binary	U8S	ECS	ECS-A	BCS	BCS-A	BCS-N	BCS-N Integer	BCS-N Positive Integers
°	MASCULINE ORDINAL INDICATOR	186	BA	1011 1010		X	X					
»	RIGHT POINTING DOUBLE ANGLE QUOTATION MARK	187	BB	1011 1011		X	X					
¼	VULGAR FRACTION ONE QUARTER	188	BC	1011 1100		X	X					
½	VULGAR FRACTION ONE HALF	189	BD	1011 1101		X	X					
¾	VULGAR FRACTION THREE QUARTERS	190	BE	1011 1110		X	X					
¿	INVERTED QUESTION MARK	191	BF	1011 1111		X	X					
À	CAP A W/GRAVE	192	C0	1100 0000		X	X					
Á	CAP A W/ACUTE	193	C1	1100 0001		X	X					
Â	CAP A W/CIRCUMFLEX	194	C2	1100 0010		X	X					
Ã	CAP A W/TILDE	195	C3	1100 0011		X	X					
Ä	CAP A W/DIAERESIS	196	C4	1100 0100		X	X					
Å	CAP A WITH RING ABOVE	197	C5	1100 0101		X	X					
Æ	CAP LIGATURE AE	198	C6	1100 0110		X	X					
Ç	CAP C W/CEDILLA	199	C7	1100 0111		X	X					
È	CAP E W/GRAVE	200	C8	1100 1000		X	X					
É	CAP E W/ACUTE	201	C9	1100 1001		X	X					
Ê	CAP E W/CIRCUMFLEX	202	CA	1100 1010		X	X					
Ë	CAP E W/DIAERESIS	203	CB	1100 1011		X	X					
Ì	CAP I W/GRAVE	204	CC	1100 1100		X	X					
Í	CAP I W/ACUTE	205	CD	1100 1101		X	X					
Î	CAP I W/CIRCUMFLEX	206	CE	1100 1110		X	X					
Ï	CAP I W/DIAERESIS	207	CF	1100 1111		X	X					
Ð	CAP ETH (ICELANDIC)	208	D0	1101 0000		X	X					
Ñ	CAP N W/TILDE	209	D1	1101 0001		X	X					
Ò	CAP O W/GRAVE	210	D2	1101 0010		X	X					
Ó	CAP O W/ACUTE	211	D3	1101 0011		X	X					
Ô	CAP O W/CIRCUMFLEX	212	D4	1101 0100		X	X					
Õ	CAP O W/TILDE	213	D5	1101 0101		X	X					
Ö	CAP O W/DIAERESIS	214	D6	1101 0110		X	X					
×	MULTIPLICATION SIGN	215	D7	1101 0111		X	X					

Table C-3-1. NSIF 1-Byte Coded Characters (continued)

Char	Name	Code			Character Set							
		Dec	Hex	Binary	U8S	ECS	ECS-A	BCS	BCS-A	BCS-N	BCS-N Integer	BCS-N Positive Integers
Ø	CAP O W/STROKE	216	D8	1101 1000		X	X					
Û	CAP U W/GRAVE	217	D9	1101 1001		X	X					
Ú	CAP U W/ACUTE	218	DA	1101 1010		X	X					
Û	CAP U W/CIRCUMFLEX	219	DB	1101 1011		X	X					
Ü	CAP U W/DIAERESIS	220	DC	1101 1100		X	X					
Ý	CAP Y W/ACUTE	221	DD	1101 1101		X	X					
Ð	CAP THORN (ICELANDIC)	222	DE	1101 1110		X	X					
ß	CAP SHARP S (GERMAN)	223	DF	1101 1111		X	X					
à	SMALL A W/GRAVE	224	E0	1110 0000		X	X					
á	SMALL A W/ACUTE	225	E1	1110 0001		X	X					
â	SMALL A W/CIRCUMFLEX	226	E2	1110 0010		X	X					
ã	SMALL A W/TILDE	227	E3	1110 0011		X	X					
ä	SMALL A W/DIAERESIS	228	E4	1110 0100		X	X					
å	SMALL A W/RING ABOVE	229	E5	1110 0101		X	X					
æ	SMALL LIGATURE AE	230	E6	1110 0110		X	X					
ç	SMALL C W/CEDILLA	231	E7	1110 0111		X	X					
è	SMALL E W/GRAVE	232	E8	1110 1000		X	X					
é	SMALL E W/ACUTE	233	E9	1110 1001		X	X					
ê	SMALL E W/CIRCUMFLEX	234	EA	1110 1010		X	X					
ë	SMALL E W/DIAERESIS	235	EB	1110 1011		X	X					
ì	SMALL I W/GRAVE	236	EC	1110 1100		X	X					
í	SMALL I W/ACUTE	237	ED	1110 1101		X	X					
î	SMALL I W/CIRCUMFLEX	238	EE	1110 1110		X	X					
ï	SMALL I W/DIAERESIS	239	EF	1110 1111		X	X					
ð	SMALL ETH (ICLANDIC)	240	F0	1111 0000		X	X					
ñ	SMALL N W/TILDE	241	F1	1111 0001		X	X					
ò	SMALL O W/GRAVE	242	F2	1111 0010		X	X					
ó	SMALL O W/ACUTE	243	F3	1111 0011		X	X					
ô	SMALL O W/CIRCUMFLEX	244	F4	1111 0100		X	X					
õ	SMALL O W/TILDE	245	F5	1111 0101		X	X					
ö	SMALL O W/DIAERESIS	246	F6	1111 0110		X	X					

Table C-3-1. NSIF 1-Byte Coded Characters (continued)

Char	Name	Code			Character Set							
		Dec	Hex	Binary	U8S	ECS	ECS-A	BCS	BCS-A	BCS-N	BCS-N Integer	BCS-N Positive Integers
÷	DIVISION SIGN	247	F7	1111 0111		X	X					
ø	SMALL O W/STROKE	248	F8	1111 1000		X	X					
ù	SMALL U W/GRAVE	249	F9	1111 1001		X	X					
ú	SMALL U W/ACUTE	250	FA	1111 1010		X	X					
û	SMALL U W/CIRCUMFLEX	251	FB	1111 1011		X	X					
ü	SMALL U W/DIAERESIS	252	FC	1111 1100		X	X					
ý	SMALL Y W/ACUTE	253	FD	1111 1101		X	X					
þ	SMALL THORN (ICELANDIC)	254	FE	1111 1110		X	X					
ÿ	SMALL Y W/DIAERESIS	255	FF	1111 1111		X	X					

Table C-3-2. NSIF 2-Byte Coded Characters

CHAR	NAME	Hex	Binary	U8S
	NOT USED	C2 80	11000010 10000000	
	NOT USED	C2 81	11000010 10000001	
	NOT USED	C2 82	11000010 10000010	
	NOT USED	C2 83	11000010 10000011	
	NOT USED	C2 84	11000010 10000100	
	NOT USED	C2 85	11000010 10000101	
	NOT USED	C2 86	11000010 10000110	
	NOT USED	C2 87	11000010 10000111	
	NOT USED	C2 88	11000010 10001000	
	NOT USED	C2 89	11000010 10001001	
	NOT USED	C2 8A	11000010 10001010	
	NOT USED	C2 8B	11000010 10001011	
	NOT USED	C2 8C	11000010 10001100	
	NOT USED	C2 8D	11000010 10001101	
	NOT USED	C2 8E	11000010 10001110	
	NOT USED	C2 8F	11000010 10001111	
	NOT USED	C2 90	11000010 10010000	
	NOT USED	C2 91	11000010 10010001	
	NOT USED	C2 92	11000010 10010010	
	NOT USED	C2 93	11000010 10010011	
	NOT USED	C2 94	11000010 10010100	
	NOT USED	C2 95	11000010 10010101	
	NOT USED	C2 96	11000010 10010110	
	NOT USED	C2 97	11000010 10010111	
	NOT USED	C2 98	11000010 10011000	
	NOT USED	C2 99	11000010 10011001	
	NOT USED	C2 9A	11000010 10011010	
	NOT USED	C2 9B	11000010 10011011	
	NOT USED	C2 9C	11000010 10011100	
	NOT USED	C2 9D	11000010 10011101	
	NOT USED	C2 9E	11000010 10011110	
	NOT USED	C2 9F	11000010 10011111	
	NO BREAK SPACE	C2 A0	11000010 10100000	X
¡	INVERTED EXCLAMATION MARK	C2 A1	11000010 10100001	X
¢	CENT SIGN	C2 A2	11000010 10100010	X
£	POUND SIGN	C2 A3	11000010 10100011	X
¤	CURRENCY SIGN	C2 A4	11000010 10100100	X
¥	YEN SIGN	C2 A5	11000010 10100101	X
¦	BROKEN BAR	C2 A6	11000010 10100110	X
§	SECTION SIGN	C2 A7	11000010 10100111	X
¨	DIAERESIS	C2 A8	11000010 10101000	X
©	COPYRIGHT	C2 A9	11000010 10101001	X
ª	FEMININE ORDINAL INDICATOR	C2 AA	11000010 10101010	X
«	LEFT-POINTING DOUBLE ANGLE QUOTATION MARK	C2 AB	11000010 10101011	X
¬	NOT SIGN	C2 AC	11000010 10101100	X
-	SOFT HYPHEN	C2 AD	11000010 10101101	X
®	REGISTERED SIGN	C2 AE	11000010 10101110	X
-	MACRON	C2 AF	11000010 10101111	X
°	DEGREE SIGN	C2 B0	11000010 10110000	X
±	PLUS-MINUS SIGN	C2 B1	11000010 10110001	X
²	SUPERSCRIP TWO	C2 B2	11000010 10110010	X
³	SUPERSCRIP THREE	C2 B3	11000010 10110011	X
´	ACUTE ACCENT	C2 B4	11000010 10110100	X
µ	MICRO SIGN	C2 B5	11000010 10110101	X
¶	PILCROW SIGN	C2 B6	11000010 10110110	X

Table C-3-2. NSIF 2-Byte Coded Characters

CHAR	NAME	Hex	Binary	U8S
·	MIDDLE DOT	C2 B7	11000010 10110111	X
¸	CEDILLA	C2 B8	11000010 10111000	X
¹	SUPERSCRIPT ONE	C2 B9	11000010 10111001	X
º	MASCULINE ORDINAL INDICATOR	C2 BA	11000010 10111010	X
»	RIGHT POINTING DOUBLE ANGLE QUOTATION MARK	C2 BB	11000010 10111011	X
¼	VULGAR FRACTION ONE QUARTER	C2 BC	11000010 10111100	X
½	VULGAR FRACTION ONE HALF	C2 BD	11000010 10111101	X
¾	VULGAR FRACTION THREE QUARTERS	C2 BE	11000010 10111110	X
¿	INVERTED QUESTION MARK	C2 BF	11000010 10111111	X
À	CAP A W/GRAVE	C3 80	11000011 10000000	X
Á	CAP A W/ACUTE	C3 81	11000011 10000001	X
Â	CAP A W/CIRCUMFLEX	C3 82	11000011 10000010	X
Ã	CAP A W/TILDE	C3 83	11000011 10000011	X
Ä	CAP A W/DIAERESIS	C3 84	11000011 10000100	X
Å	CAP A WITH RING ABOVE	C3 85	11000011 10000101	X
Æ	CAP LIGATURE AE	C3 86	11000011 10000110	X
Ç	CAP C W/CEDILLA	C3 87	11000011 10000111	X
È	CAP E W/GRAVE	C3 88	11000011 10001000	X
É	CAP E W/ACUTE	C3 89	11000011 10001001	X
Ê	CAP E W/CIRCUMFLEX	C3 8A	11000011 10001010	X
Ë	CAP E W/DIAERESIS	C3 8B	11000011 10001011	X
Ì	CAP I W/GRAVE	C3 8C	11000011 10001100	X
Í	CAP I W/ACUTE	C3 8D	11000011 10001101	X
Î	CAP I W/CIRCUMFLEX	C3 8E	11000011 10001110	X
Ï	CAP I W/DIAERESIS	C3 8F	11000011 10001111	X
Ð	CAP ETH (ICELANDIC)	C3 90	11000011 10010000	X
Ñ	CAP N W/TILDE	C3 91	11000011 10010001	X
Ò	CAP O W/GRAVE	C3 92	11000011 10010010	X
Ó	CAP O W/ACUTE	C3 93	11000011 10010011	X
Ô	CAP O W/CIRCUMFLEX	C3 94	11000011 10010100	X
Õ	CAP O W/TILDE	C3 95	11000011 10010101	X
Ö	CAP O W/DIAERESIS	C3 96	11000011 10010110	X
×	MULTIPLICATION SIGN	C3 97	11000011 10010111	X
Ø	CAP O W/STROKE	C3 98	11000011 10011000	X
Ù	CAP U W/GRAVE	C3 99	11000011 10011001	X
Ú	CAP U W/ACUTE	C3 9A	11000011 10011010	X
Û	CAP U W/CIRCUMFLEX	C3 9B	11000011 10011011	X
Ü	CAP U W/DIAERESIS	C3 9C	11000011 10011100	X
Ý	CAP Y W/ACUTE	C3 9D	11000011 10011101	X
Þ	CAP THORN (ICELANDIC)	C3 9E	11000011 10011110	X
ß	CAP SHARP S (GERMAN)	C3 9F	11000011 10011111	X
à	SMALL A W/GRAVE	C3 A0	11000011 10100000	X
á	SMALL A W/ACUTE	C3 A1	11000011 10100001	X
â	SMALL A W/CIRCUMFLEX	C3 A2	11000011 10100010	X
ã	SMALL A W/TILDE	C3 A3	11000011 10100011	X
ä	SMALL A W/DIAERESIS	C3 A4	11000011 10100100	X
å	SMALL A W/RING ABOVE	C3 A5	11000011 10100101	X
æ	SMALL LIGATURE AE	C3 A6	11000011 10100110	X
ç	SMALL C W/CEDILLA	C3 A7	11000011 10100111	X
è	SMALL E W/GRAVE	C3 A8	11000011 10101000	X
é	SMALL E W/ACUTE	C3 A9	11000011 10101001	X
ê	SMALL E W/CIRCUMFLEX	C3 AA	11000011 10101010	X
ë	SMALL E W/DIAERESIS	C3 AB	11000011 10101011	X
ì	SMALL I W/GRAVE	C3 AC	11000011 10101100	X
í	SMALL I W/ACUTE	C3 AD	11000011 10101101	X

Table C-3-2. NSIF 2-Byte Coded Characters

CHAR	NAME	Hex	Binary	U8S
î	SMALL I W/CIRCUMFLEX	C3 AE	11000011 10101110	X
ï	SMALL I W/DIAERESIS	C3 AF	11000011 10101111	X
ð	SMALL ETH (ICLANDIC)	C3 B0	11000011 10110000	X
ñ	SMALL N W/TILDE	C3 B1	11000011 10110001	X
ò	SMALL O W/GRAVE	C3 B2	11000011 10110010	X
ó	SMALL O W/ACUTE	C3 B3	11000011 10110011	X
ô	SMALL O W/CIRCUMFLEX	C3 B4	11000011 10110100	X
õ	SMALL O W/TILDE	C3 B5	11000011 10110101	X
ö	SMALL O W/DIAERESIS	C3 B6	11000011 10110110	X
÷	DIVISION SIGN	C3 B7	11000011 10110111	X
ø	SMALL O W/STROKE	C3 B8	11000011 10111000	X
ù	SMALL U W/GRAVE	C3 B9	11000011 10111001	X
ú	SMALL U W/ACUTE	C3 BA	11000011 10111010	X
û	SMALL U W/CIRCUMFLEX	C3 BB	11000011 10111011	X
ü	SMALL U W/DIAERESIS	C3 BC	11000011 10111100	X
ý	SMALL Y W/ACUTE	C3 BD	11000011 10111101	X
þ	SMALL THORN (ICELANDIC)	C3 BE	11000011 10111110	X
ÿ	SMALL Y W/DIAERESIS	C3 BF	11000011 10111111	X

c. Greater Than Eight-bit Grey Scale Presentation. For 8+ bit grey scale systems, colour components can first be converted to 8-bit grey scale followed by a dynamic range adjustment to the bit range supported by the presentation device.

d. Washout. The potential exists for overlays to be inadvertently hidden or washed out when compared to the background over which they are placed, particularly when converting from colour to grey scale. The application developer should take a design approach that obviates the potential for a recipient to inadvertently overlook presentation material caused by inadequate lack of contrast in the presentation.

12. File System Constraints. A NSIF File is presented as a stream of contiguous bytes. This format may not be suitable for some file systems. The translation of NSIF Files to and from the local file format for a system should be examined for potential incompatibilities before an implementation is attempted.

13. Security Considerations. A NSIF File contains sufficient security information in the NSIF File Header and Subheaders to allow implementors to meet virtually any security requirement for displaying classification data. Exact security information handling requirements generally are specified by appropriate accreditation authorities or specific user requirements. It is suggested that implementors extract the classification data from the NSIF File Header and ensure that the information is always displayed whenever the NSIF File or any of its Segments is displayed.

14. NSIF Printer Incompatibilities. Some printers do not allow for transparent pixels in imagery (e.g., Postscript level 1 and 2). If a NSIF composition uses CGM elements under images with NSIF image padding (transparent pixels) the CGM will not be visible in any areas under the pad pixels.

15. Universal Transverse Mercator (UTM) Coordinate Hemisphere Resolution. The Image Coordinate Representation (ICORDS) Field allows one value for an image's UTM hemispheric designation, N for northern or S for southern. When the Image Geographic Location (IGEOL) Field is filled with UTM coordinates, image presentations that cross the Equator have northing values that are ambiguous, and it is not immediately obvious which corners are on which side of the Equator. Given their UTM coordinates and zone, the following method resolves the hemispheric designation of four individual corners of an image.

a. North (N)/South (S) Method. When used for pure UTM coordinates, the ICORDS contains one of two values: N if the northernmost corner is on or north of the Equator, S if the northern most point is south of the Equator. When the ICORDS field contains S, all 4 corners are south of the Equator. When the ICORDS field contains N, the following process resolves the hemispheres of the individual corners:

- (1) Assume that the north-south spread of the image is within 5000km (about 45 degrees).
- (2) Compute the smallest northing (n_{min}) from the 4 corners. (The corner with that northing value is certain to be one of the corners on or north of the Equator.)
- (3) Then any corner with a northing in excess of [$n_{min} + 5$ million] is located south of the Equator. Any northing with a northing not exceeding [$n_{min} + 5$ million] is located on or north of the Equator.

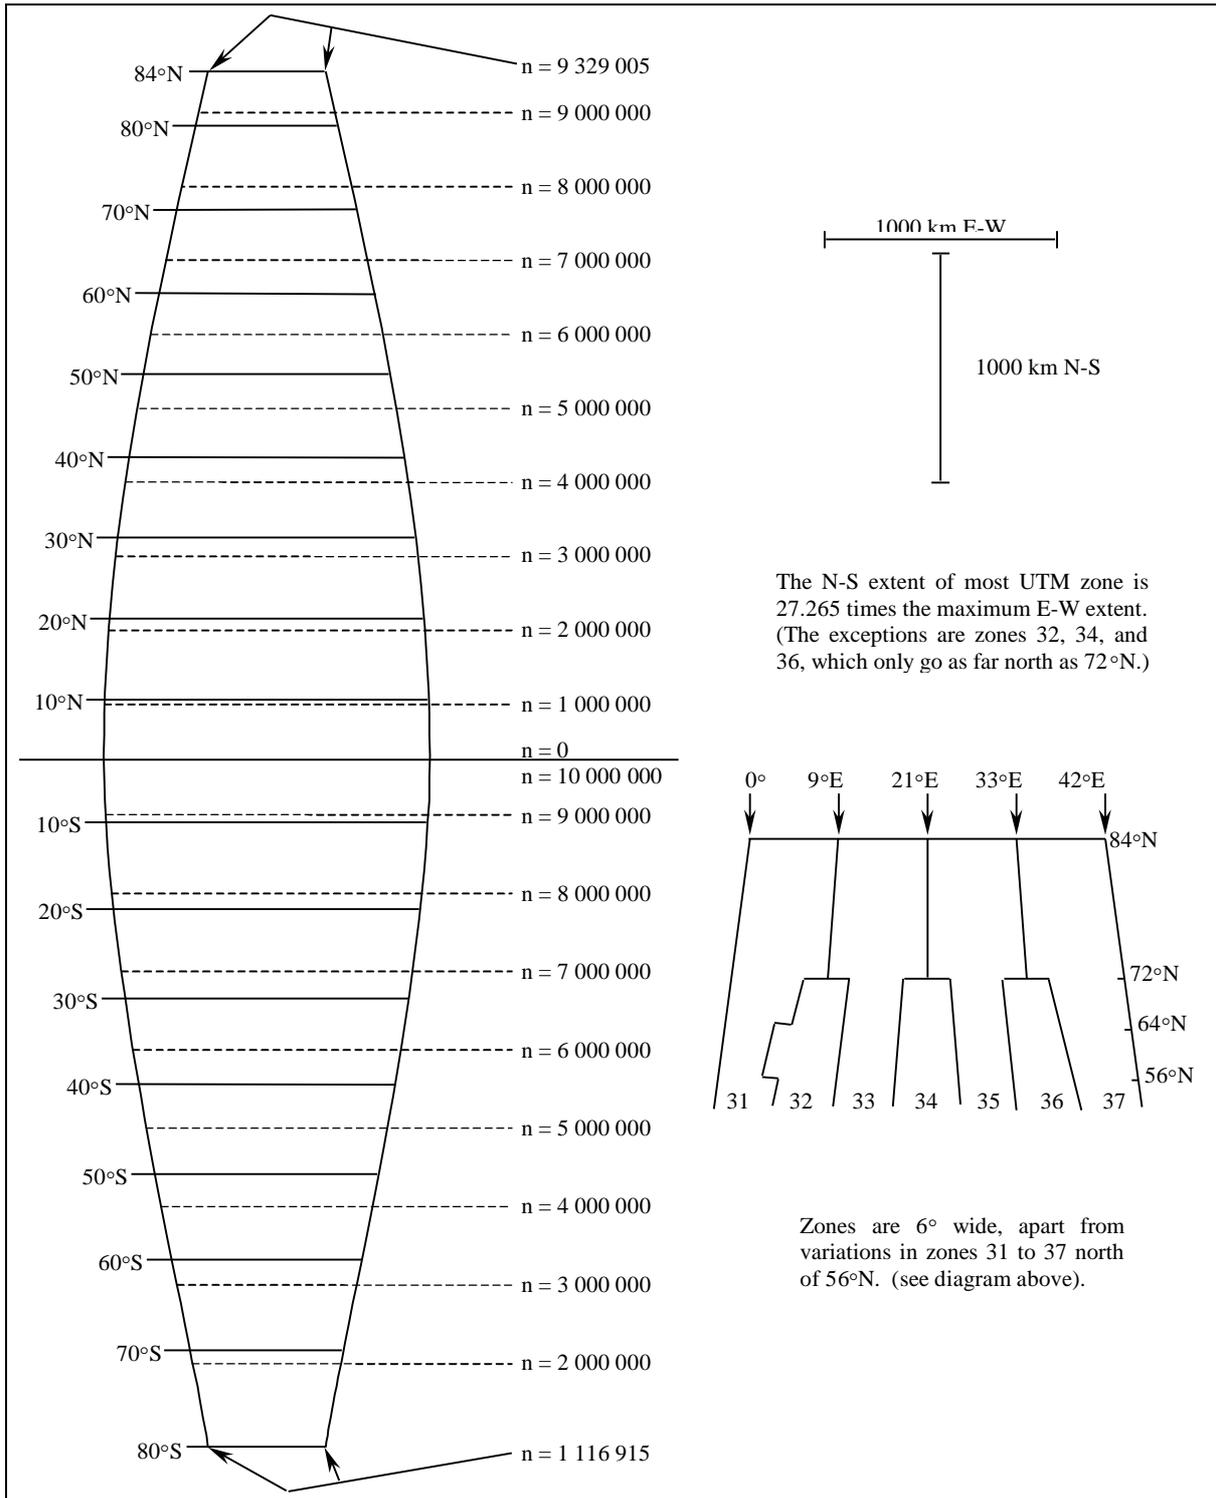


Figure C-3-1. A Typical World Geodetic System 84 (WGS 84) Universal Transverse Mercator (UTM) Zone (Compressed)

APPENDIX 4 TO ANNEX C. SAMPLE NSIF FILE STRUCTURE

The following is an example of handling a NSIF File that has control TRE with overflow. The NSIF File has a single image.

Table C-4-1. Sample NSIF File Structure

NSIF FILE HEADER													IMAGE SUBHEADER					IMAGE DATA	DATA EXTENSION SUBHEADER				DATA EXTENSION									
MAIN NSIF HEADER													IMAGE SUBHEADER					DES SUBHEADER														
NAME	FHDR	CLEVEL	ETC	FL	HL	NUMI	LISH001	LI001	NUMS	NUMX	NUMT	NUMDES	LDSH001	LD001	NUMRES	UDHDL	XHDL	IM	ETC	IMAG	UIDDL	IXSHDL	IXSOFL	IXSHD	IMAGE DATA	DE	DESTAG	ETC	DESOFLOW	DESITEM	DESSLHL	DESDATA
BYTES	9	2		12	6	3	6	10	3	3	3	3	4	9	3	5	5	2		4	5	5	3	98000		2	25		6	3	4	42000
VALUE	NSIF01.00	06		00000805075764	000417	001	0984442	0084934656	000	000	000	001	0249	000042000	000	000000	000000	IM		10	000000	980003	001		DE	TRE OVERFLOW		UID	001	0000		

TRE 1 (32,000 BYTES)
TRE 2 (27,000 BYTES)
TRE 3 (39,000 BYTES)

TRE 4 (42,000 BYTES)

Note: Capacity of IXSHD is 99,999 bytes, you cannot split a TRE, therefore the first 3 TRE fit into the IXSHD field and the 4th TRE is overflowed into the Data Extension Area.

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX 5 TO ANNEX C. PRODUCT CONFIGURATIONSINTRODUCTION

This appendix contains general or explanatory information that may be helpful, but is not mandatory.

1. General. The NSIF provides a very flexible means to package imagery products. One of the main objectives of NSIF is to provide increased interoperability among potentially disparate imagery systems. For the purposes of NSIF, interoperability is defined as the ability to exchange NSIF formatted imagery products among NSIF capable systems in a manner that is meaningful and useful to the end users. This places a significant burden on NSIF read capable implementations to be able to interpret and use potentially any combination of NSIF File format options that may be created by NSIF File producers. Consequently, significant care should be taken when defining product specifications for NSIF formatted imagery products.

2. Purpose. The objective of the following discussion is to describe several generalised product configurations that can be used as the basis for defining specific imagery products. These product configurations are typical of those successfully used within the imagery and mapping community to date.

NSIF PRODUCT CONFIGURATIONS

3. General. An imagery product may potentially be produced under one of the following concepts:

a. Single NSIF File, Single Base Image. This is the most common use of the NSIF format. In this product concept, the NSIF File is produced with a focus on a single image, commonly called the base image. All other Segments and extended data within the NSIF File are focused on amplifying the information portrayed in the base image.

b. Single NSIF File, Multiple Images. In this product concept, the NSIF File is produced containing multiple images, all of which have equal or similar significance to the value of the product. Other Segments and extended data within the NSIF File are focused on amplifying the information portrayed in the image(s) to which they are associated.

c. Single NSIF File, No Image. This type of product may only have GSs, or only TS, or only Extension Segments, or any combination of these Segments. The significance of the data within the NSIF File may pertain only to that NSIF File, or it may pertain to one or more NSIF Files with which it is associated.

d. Multiple Correlated NSIF Files. For this product concept, the product is composed of multiple NSIF Files that are interrelated as explicitly defined in the product specification.

4. Single NSIF File, Single Base Image. For this type of product NSIF File, there is one image of central focus, the base image, placed on the CCS plane. Its first pixel may be located at the origin (0,0) of the CCS, or off-set from the CCS origin according to the row/column coordinate values placed in the Location (LOC) field of the Image Subheader (ILOC field). Figure C-5-1 provides a representative portrayal for the following discussion.

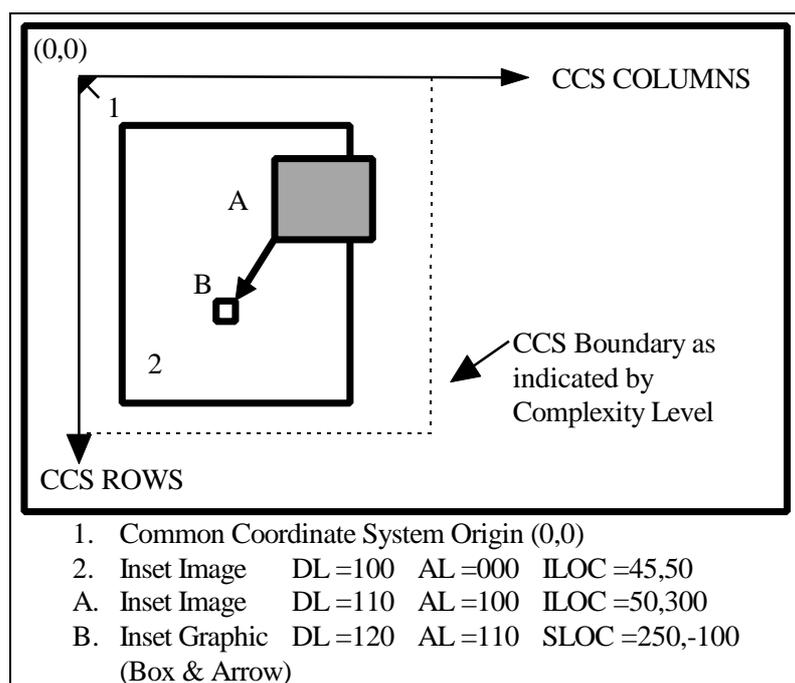


Figure C-5-1. Single NSIF File, Single Base Image

a. **Image Segment (IS) Overlays.** Additional images, often called subimages or inset images, may be included as separate ISs in the NSIF File. The purpose of these images is to add information or clarity about the base image. Their placement in the CCS plane is controlled by the value of each Segment's ALVL and LOC row/column value. When overlay images are attached to the base image, the LOC value represents a row/column off-set in the CCS from the location specified by the base image row/column LOC value. If the overlay image is unattached to any other Segment (ALVL000), the overlay's LOC value is a row/column off-set from the CCS origin (0,0).

b. **Graphic Segment (GS) Overlays.** GS are used to provide graphical (lines, polygons, ellipses, etc.) and textual annotation to the base image. The graphic representation is done using CGM. In a manner similar to IS overlays, the placement of graphics in the CCS plane is controlled by the value of each Segment's ALVL and LOC value. CGM has its own internal Cartesian coordinate space called Virtual Display Coordinates (VDC) that has its own defined origin (0,0) point. The row/column value in the GS LOC field (SLOC field) identifies the placement of the graphic's VDC origin point relative to the CCS origin when ALVL is equal to 000, or relative to the Segment LOC to which it is attached.

c. **Non-Destructive Overlays.** NSIF IS and GS overlays are handled in a non-destructive manner. The overlays may be placed anywhere within the bounds of the CCS (defined for a specific NSIF File by the CLEVEL field). They may be placed totally on the base image, partially on the base image, or entirely off of the base image. Any IS or GS can be placed on or under any other Segment, fully or partially. The visibility of pixel values of overlapping Segments is determined by the DLVL assigned to that Segment. Each displayable Segment (images and graphics) is assigned a DLVL (ranging from 001 to 999) that is unique within the NSIF File. At any CCS pixel location shared by more than one image or graphic, the visible pixel value is the one from the Segment having the greatest DLVL value. If the user of a NSIF File opts to move an overlay, or turn off the presentation of an overlay, the next greatest underlying pixel value(s) will then become visible. This approach allows for the non-destructible nature of NSIF overlays as opposed to the 'burned in' approach where overlay pixel values are used to replace pixels values of the underlying image.

d. **Text Segments (TS).** TSs allow inclusion in the NSIF File of textual information related to the base image, perhaps a textual description of the activities portrayed in the image.

e. Extension Data. The NSIF File Header and each standard data type Subheader have designated expandable fields to allow for the optional inclusion of Extension Data. The inclusion of Extension Data provides the ability to add data/information about the standard data type (metadata) that is not contained in the basic fields of the Headers and Subheaders. The additional data is contained within one or more NSIF TRE that are placed in the appropriate field (user-defined Data Field or extended Data Field) of the standard data type Subheader for which the metadata applies. When TRE have application across multiple data types in the NSIF File, or otherwise apply to the entire NSIF File in general, they are placed in the appropriate NSIF File Header Fields. Whereas general purpose NSIF readers should always be able to portray IS and GS and act on Standard Header and Subheader Data, they may not always be able to act on product specific Extension Data. Upon receipt of a NSIF File that contains Extension Data, a NSIF compliant system should at least ignore the extensions and properly interpret the other legal components of the NSIF File. Exemplary use of TRE:

- (1) Data about people, buildings, places, landmarks, equipment or other objects that may appear in the image.
- (2) Data to allow correlation of information among multiple images and annotations within a NSIF File.
- (3) Data about the equipment settings used to obtain the digital image, XRAY, etc.
- (4) Data to allow geo-positioning of images or measurement of distances of objects in the images.

5. Single NSIF File, Multiple Images. For this type of product NSIF File, multiple images of equal or similar focus (multiple 'base' images) are placed within the CCS plane. Each image is located at an off-set from the CCS origin such that there is no overlap among the images. The CLEVEL of the NSIF File must be chosen such that the bounds of the CCS for the NSIF File are sufficient to contain the extent of all Segments within the NSIF File. Figure C-5-2 provides a representative portrayal for this product type. NSIF packer application users need to be aware that the ILOC field may not be large enough to place unattached images everywhere in the CCS. However, attached images can be positioned over the entire CCS.

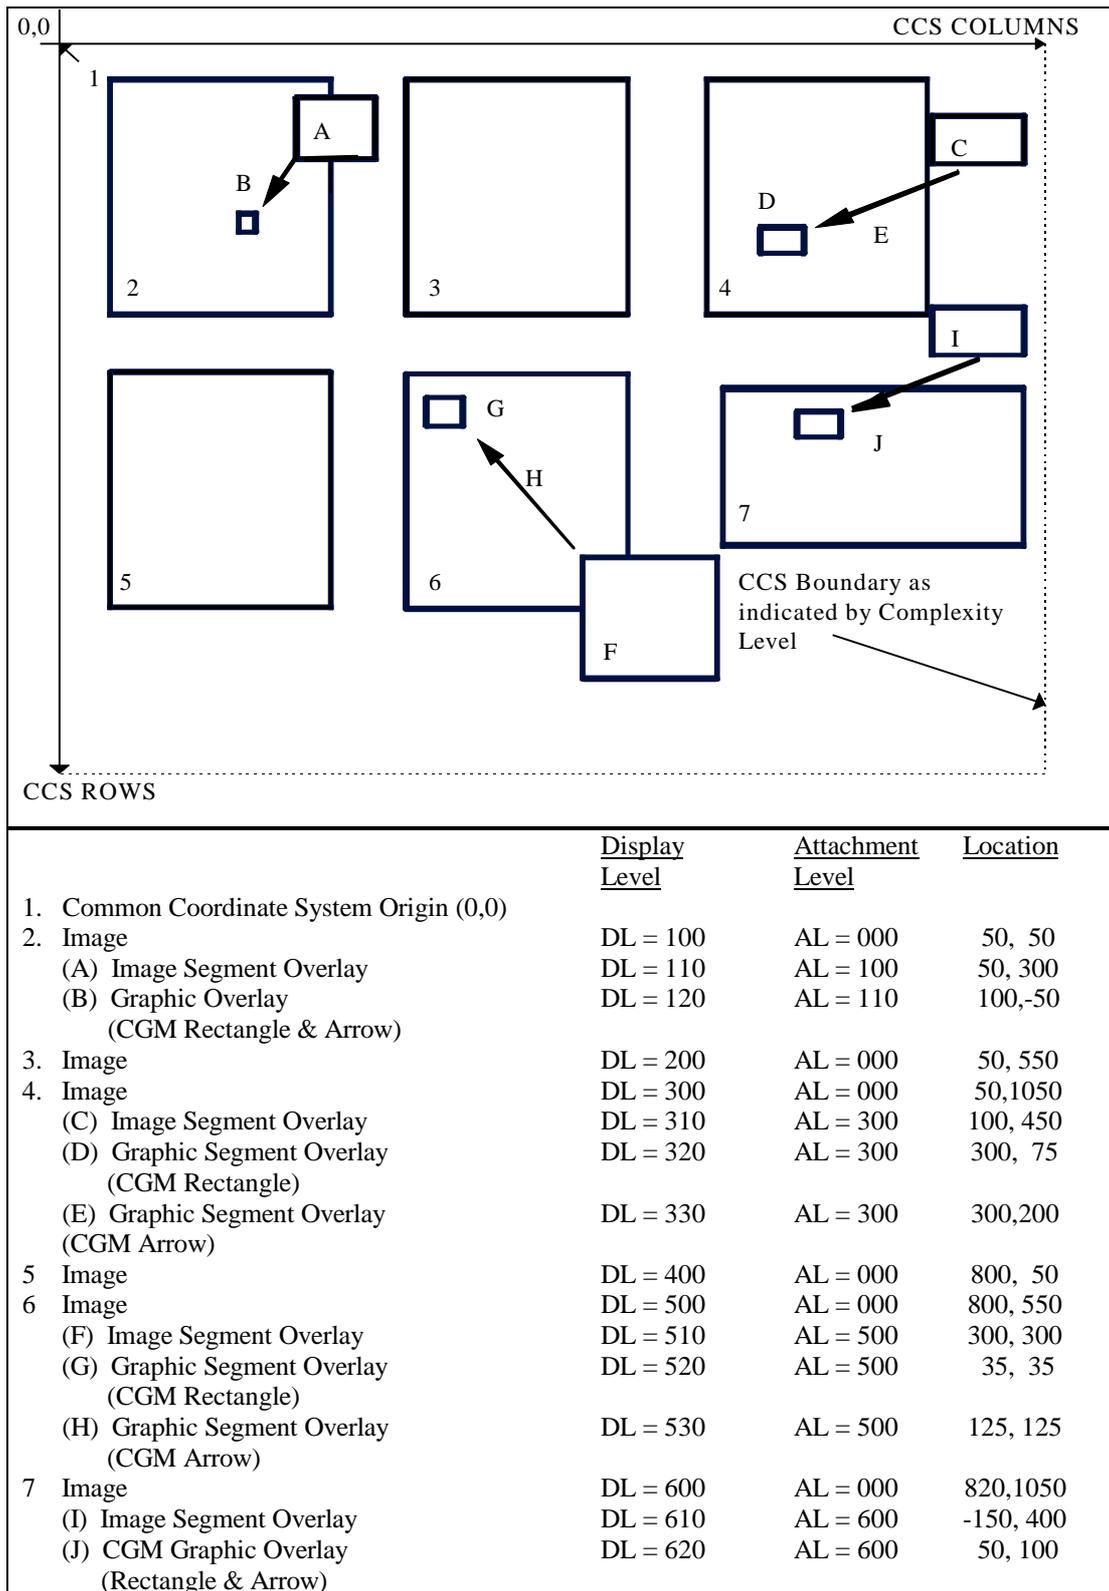


Figure C-5-2. Single NSIF File, Multiple Images

a. Overlays. Each image may be overlaid with additional IS and GS in the same fashion as described for the single NSIF File, single image case above. All overlays associated with a specific image should be attached to that specific image. DLVLs assigned to each image and graphic in the NSIF File must be unique within the NSIF File.

b. Text Segments (TS). Each TS should be clearly marked as to whether it applies to the NSIF File as a whole, or if it is associated with specific images within the NSIF File.

c. Extension Data. TRE are placed in the NSIF File Header Extension Fields when applicable to the NSIF File as a whole. Extensions specific to a Segment are placed in that Segment's Subheader.

6. Single NSIF File, No Image. A single NSIF File product does not always contain an image. It could contain one or more GS, one or more TSs, one or more Extension Segments, or any combination of these non-IS. The NSIF File may be useful as a stand alone product, or it may be intended for use in conjunction with other NSIF Files. For example, the NSIF File could contain graphic overlays to be merged with or applied to another NSIF File that was pre-positioned or transmitted at an earlier time. Any general purpose NSIF reader should at least be able to interpret and render the standard Segments of no image NSIF Files on a stand alone basis.

7. Multiple Correlated NSIF Files. An imagery product may be composed of multiple NSIF Files that are interrelated in a specified manner. This approach vastly increases the potential combination and permutation of options a general purpose NSIF reader would need to support to maintain full interpret capability. Therefore, each NSIF File in a multiple correlated NSIF File set must be structured such that a general purpose NSIF reader can properly interpret and render the NSIF File as if it were a stand alone product. The correlation of multiple NSIF Files in a single product must be explicitly and unambiguously defined in a product specification. NSIF readers can then be further categorised according to specific multiple NSIF File product specifications that are supported. Representative use of multiple correlated NSIF Files includes:

a. Stereo Imagery. Some stereo image products are composed of separate NSIF Files for the stereo components of each image scene.

b. Imagery Mosaics. Some extremely large image and map products consist of multiple NSIF Files structured such that they can be pieced together in mosaic fashion by the interpret application as if the multiple NSIF Files were a single larger image.

c. Reduced Resolution Data Set (Rset). Reduced Resolution Data Set (Rset) products are composed of multiple NSIF Files. One NSIF File contains a full resolution image and the other NSIF Files contain the same image in a variety of lower resolutions.

d. Imagery and Maps. Geo-positioning products exist which consist of multiple separate NSIF Files containing interrelated maps, images, graphics, legends, product indices, and geo-reference data.

THIS PAGE INTENTIONALLY LEFT BLANK

ANNEX D. STANDARD GEOSPATIAL SUPPORT DATA EXTENSIONS

1. General. That set of support data needed to accomplish the mission of a system receiving a NSIF File is referred to as appropriate support data. The appropriate support data may vary across systems receiving NSIF Files. A system receiving a NSIF File may add or subtract support data before passing the file to another system with a different mission. This strategy implies a modular support data definition approach.

Image and raster map providers produce NSIF Files with support data from other formats which also contain support information. Table D-1 identifies the recommended CEs that define the format for the support information within a NSIF File that contains geo-referenced image, matrix, or raster map data. These CEs, also called the Geospatial Support Data Extensions (GeoSDEs), are defined in DIGEST - Part 2, Annex D.

The RETAG or CETAG value of a GeoSDE is composed of :

- a 5-character alphanumeric (BCS-A) identifier for the SDE. ;
- a 1-character alphanumeric (BCS-A) identifier defining the SDE version number ('A', 'B', ...)

The Annex D appeared in version 2.0 of DIGEST. This initial version of the GeoSDEs is identified as 'A'. Use of the latest version of the GeoSDEs is highly recommended. See the DIGEST home page (<http://www.digest.org>) for details.

The GeoSDEs are the recommended TREs relevant to geo-referenced image, matrix, or raster map data. Systems using geo-referenced imagery, matrix, or raster map data formatted according to NSIF should be designed to extract the needed data from the TRE described in DIGEST. The categories of image and extensive digital geographic information are shown in DIGEST.

Table D-1. Geospatial Support Data Extensions (GEOSDE)

SDE IDENTIFIER	SCOPE
GEOPS	Geo-referencing parameters including datums, ellipsoids
PRJPS	Projection parameters
GRDPS	Non-rectified image, raster, or matrix data that is positioned using a location grid
GEOLO	Image, raster, or matrix data rectified consistently with geographic (lat/long) coordinate systems
MAPLO	Image, raster, or matrix data rectified consistently with cartographic (E,N) coordinate systems
REGPT	Registration points in either geographic or cartographic systems
BNDPL	Accurate geographic location of the significant part of the image
ACCPO	Positional Accuracy
ACCHZ	Horizontal Accuracy
ACCVT	Vertical Accuracy
SOURC	Map Source Description
SNSPS	Sensor Parameters Data Extension
FACCB	Attribute FACC Code definition

THIS PAGE INTENTIONALLY LEFT BLANK

ANNEX E. COMPLEXITY LEVELS (CLEVEL)

Table E-1 defines the conditions of NSIF File features used to determine the CLEVEL assignment for a given NSIF File. The six key NSIF features which differentiate CLEVEL are: CCS extent, file size (bytes), image size (rows/columns), number of multi-spectral bands, number of ISs per NSIF File, and aggregate size of GSs. The other listed features provide the parameter, value, range conditions, and constraints for all the defined CLEVEL (03, 05, 06, and 07). Although a NSIF File shall be marked at the lowest CLEVEL for which it qualifies, it shall be marked no lower than the highest CLEVEL feature condition included in the NSIF File. For example, a 51 Mbyte file shall be marked at CLEVEL 05, even when all other features in the NSIF File do not exceed the specified CLEVEL 03 conditions.

Table E-1. NSIF 01.00 Complexity Levels (CLEVEL)

NSIF File Features	Complexity Level			
	3	5	6	7
Common Coordinate System Extent (Pixels)	(00000000, 00000000) to (00002047, 00002047)	(00000000, 00000000) to (00008191, 00008191)	(00000000, 00000000) to (00065535, 00065535)	(00000000, 00000000) to (99999999, 99999999)
Maximum File Size	50 Mbyte -1byte (52,428,799 bytes)	1 Gbyte -1 byte (1,073,741,823 bytes)	2 Gbyte -1 byte (2,147,483,647 bytes)	10Gbyte -1 byte (10,737,418,239 bytes)
Image Size (Image(s) placed within CCS extent)	00000002 to 00002048 Rows X 00000002 to 00002048 Columns (R and C ≤ 2048)	00000002 to 00008192 Rows X 00000002 to 00008191 Columns (R or C > 2048)	00000002 to 00065536 Rows X 00000002 to 00065536 Columns (R or C > 8192)	00000002 to 99999999 Rows X 00000002 to 99999999 Columns (R or C > 65536)
Image Blocking (Rectangular Blocks allowed)	Single and Multiple Blocks 0001 to 2048 Rows X 0001 to 2048 Columns	Single and Multiple Blocks 0001 to 8192 Rows X 0001 to 8192 Columns	Multiple blocking is mandatory for images that exceed 8192 Pixels per Row or Column. 0001 to 8192 Rows X 0001 to 8192 Columns	
Monochrome (MONO) No Compression	Single Band 1, 8, 12, 16, 32, and 64-Bits per Pixel (NBPP) With and without LUT IC = NC, NM IMODE = B			
Colour 1 and 8-Bit (RGB / LUT) No Compression	Single Band 1 and 8-Bits per Pixel (NBPP) With LUT IC = NC, NM IMODE = B			
Colour 24 Bit (RGB) No Compression	Three Band 8-Bits per Pixel (NBPP) No LUT IC = NC, NM IMODE = B, P, R, S			
Multispectral (MULTI) No Compression	2 to 9 Bands, 8, 16, 32, and 64-Bits per Pixel per Band With and without LUT in each Band IC = NC, NM IMODE = B, P, R, S	2 to 255 Bands, 8, 16, 32, and 64-Bits per Pixel per Band With and without LUT in each Band IC = NC, NM IMODE = B, P, R, S	2 to 999 Bands, 8, 16, 32, and 64-Bits per Pixel per Band With and without LUT in each Band IC = NC, NM IMODE = B, P, R, S	
JPEG DCT Compression Monochrome (MONO)	Single Band 8 and 12-Bit Sample (NBPP) No LUT IC = C3, M3 IMODE = B			
JPEG DCT Compression 24-Bit Colour (RGB)	Three Bands 8-Bit Sample per Band (NBPP) No LUT IC = C3, M3 IMODE = P			
JPEG DCT Compression 24-Bit Colour (YCbCr601)	Three Bands 8-Bit Sample per Band (NBPP) No LUT IC = C3, M3 IMODE = P			

Table E-1. NSIF 01.00 Complexity Levels (CLEVEL) (continued)

NSIF File Features	Complexity Level			
	3	5	6	7
Downsampled JPEG DCT Monochrome (MONO)	Single Band Single Block Only 8-Bit Sample (NBPP) No LUT IC = I1 IMODE = B (Image size may not exceed 2048 Pixels per Row or Column.)			
JPEG Lossless Compression Monochrome (MONO)	Single Band 8, 12, and 16-Bit Sample per Band (NBPP) With or Without LUT IC = C5, M5 IMODE = B (This feature is optional for implementation.)			
JPEG Lossless Compression 24-Bit Colour (RGB)	Three Bands 8-Bit Sample per Band (NBPP) No LUT IC = C5, M5 IMODE = P (This feature is optional for implementation.)			
Bi-Level Compression (MONO)	Single Band Single Block 1-Bit per Pixel (NBPP) With and without LUT IC = C1, M1 IMODE = B COMRAT = 1D, 2DS, 2DH (Image size may not exceed 2560 Pixels per Row by 8192 Pixels per Column.)			
Bi-Level Compression (RGB/LUT)	Single Band Single Block 1-Bit per Pixel (NBPP) With and without LUT IC = C1, M1 IMODE = B COMRAT = 1D, 2DS, 2DH (Image size may not exceed 2560 Pixels per Row by 8192 Pixels per Column.)			
VQ Compression	Single Band 8-Bits per Pixel (NBPP) 4 x 4 Kernel organised in 4 Tables IC = C4, M4 IMODE = B			
VQ Monochrome (MONO)	With and without LUT IMODE = B			
VQ 8-Bit Colour (RGB/LUT)	With LUT IMODE = B			
Multispectral (MULTI) Individual Band JPEG Compression	2 to 9 Bands 8 and 12-Bits per Pixel per Band No LUT IC = C3, M3 IMODE = B, S	2 to 255 Bands 8 and 12-Bits per Pixel per Band No LUT IC = C3, M3 IMODE = B, S	2 to 999 Bands 8 and 12-Bits per Pixel per Band No LUT IC = C3, M3 IMODE = B, S	
Multispectral (MULTI) Multi-Component Compression	2 to 9 Bands 8 and 12-Bits per Pixel per Band No LUT IC = C6, M6 IMODE = B, P, S (This feature is optional for implementation.)	2 to 255 Bands 8, and 12-Bits per Pixel per Band No LUT IC = C6, M6 IMODE = B, P, S (This feature is optional for implementation.)	2 to 999 Bands 8 and 12-Bits per Pixel per Band No LUT IC = C6, M6 IMODE = B, P, S (This feature is optional for implementation.)	
Elevation Data (NODISPLAY)	Single Band 8, 12, 16, 32, and 64-Bits per Pixel (NBPP) No LUT IC = NC IMODE = B ICAT = DTEM, ISUBCATn code from DIGEST, Part 3, Section 7 (or BCS Spaces (0x20) Applicable TRE: Geospatial Support Data Extensions (GEOSDE), DIGEST, Part 2, Annex D (This feature is optional for implementation.)			

Table E-1. NSIF 01.00 Complexity Levels (CLEVEL) (continued)

NSIF File Features	Complexity Level			
	3	5	6	7
Location Grid (NODISPLY)	Two Bands 8, 12, 16, 32, and 64-Bits per Pixel (NBPP) No LUT IC = NC IMODE = B, P ICAT = LOCG, ISUBCATn = CGX, CGY, or GGX, GGY Applicable TRE: Geospatial Support Data Extensions (GEOSDE), DIGEST, Part 2, Annex D (This feature is optional for implementation.)			
Matrix Data (NODISPLY)	2 to 9 Bands 8, 16, 32, and 64-Bits per Pixel per Band No LUT in any Band IMODE = B, P, R, S (This feature is optional for implementation.)	2 to 255 Bands 8, 16, 32, and 64-Bits per Pixel per Band No LUT in any Band IMODE = B, P, R, S (This feature is optional for implementation.)	2 to 999 Bands 8, 16, 32, and 64-Bits per Pixel per Band No LUT in any Band IMODE = B, P, R, S (This feature is optional for implementation.)	
Number of Image Segments per File	0 to 20	0 to 100		
Number of CGM Graphic Segments per File	0 to 100			
Aggregate Size of Graphic Segments	1 Mbyte maximum	2 Mbyte maximum		
CGM Graphic Profile	MIL-STD-2301A			
Number of Text Segments per File	0 to 32 Segments			
Text Format Codes Supported	STA, MTF, U8S, UT1			
Text Data per Segment	00001 to 99999 Bytes			
Tagged Record Extensions (TRE)	TRE may appear in the UDHD, XHD, UDID, IXSHD, SXSHD, and TXSHD fields and TRE_OVERFLOW DES(s) regardless of CLEVEL.			
Number of Data Extension Segments (DES) per File	0 to 10			
Currently Registered DES	(See Implementing Documents)			
Number of Reserved Extension Segments (RES) per File	None			
Currently Approved RES	None			

THIS PAGE INTENTIONALLY LEFT BLANK